
LIN ENGINEERING
MOTOR SPECIALISTS IN MOTION
A MOONS' COMPANY

16245 Vineyard Blvd., Morgan Hill, CA 95037
Phone: (408) 919-0200 Fax: (408) 919-0201
Email: Sales@linengineering.com | Techsupport@linengineering.com
www.linengineering.com

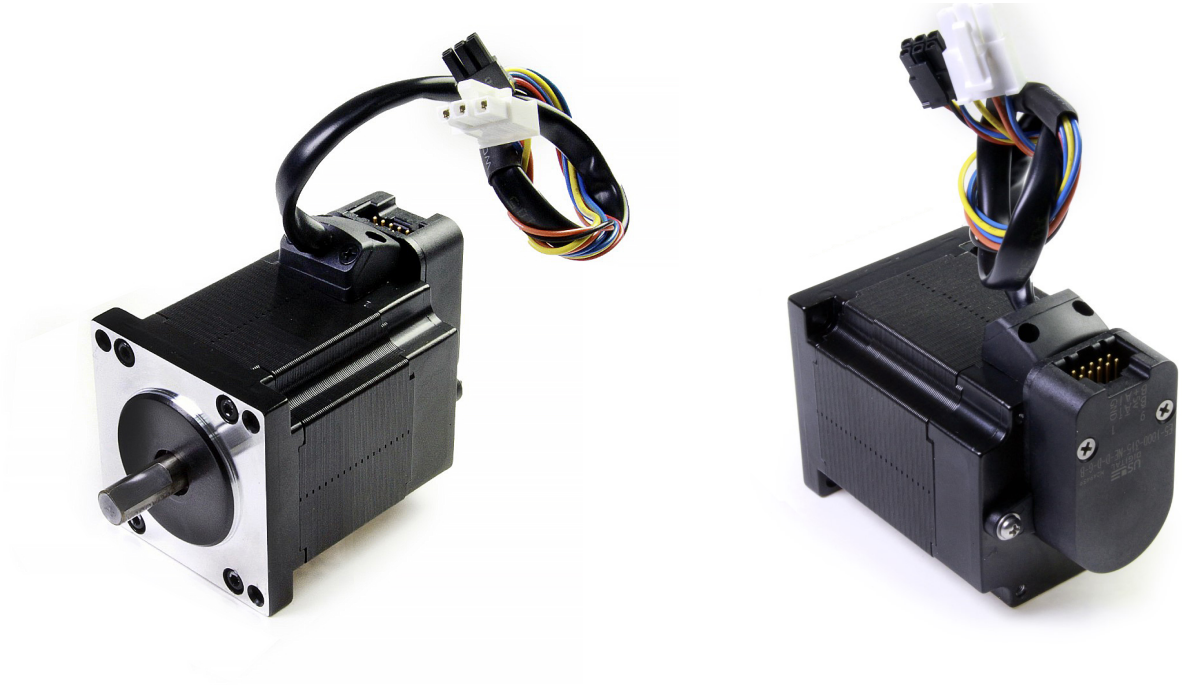

MOTOR SPECIFICATIONS

Part Number	**BL23E22-01D-06RO**
Length Dimension	54.5 mm [2.15 in]
Rated Voltage	24 VDC
Rated Output Power	60 W
Pole Number	8
Phase Number	3
Rated Speed	4000 RPM
Max Speed	5000 RPM
Rated Torque	0.145 N-m [20.53 oz-in]
Rated Current	3 Amps
Back EMF Constant	3.36 Vrms/krpm [4.75 Vpeak/krpm]
Moment of Inertia	0.0000148 kg-m^2 [0.81 oz-in^2]
Resistance	0.48 Ohms
Inductance	0.45 mH
Weight	0.64 kg [1.41 lb]


ENCODER SPECIFICATIONS


Part Number	**E5 Encoder**
Type	Optical Incremental Encoder
Resolution	1000 CPR
Index	Yes
Output Type:	Differential

MOTOR OPERATING SPECIFICATIONS

Hall Effect Angle	120 electrical Angle
Radial Play	0.002 in [0.05 mm] @ 0.99 lbs [0.45 kg]
End Play	0.003 in [0.08 mm] @ 99.21 lbs [45.00 kg]
Max. Radial Force	0.787 in [20.00 mm] @ 16.80 lbs [7.62 kg]
Max. Axial Force	3.37 lbs [1.53 kg]
Insulation Class	Class B
Dielectric Strength	500 VDC for 1 minute
Insulation Resistance	100 Ω min. 500 VDC
Ambient Operating Temp.	-20°C to 50°C
Storage Temperature	-20°C to 100°C
Humidity Range (%)	85% (RH) non-condensing


DIMENSIONS

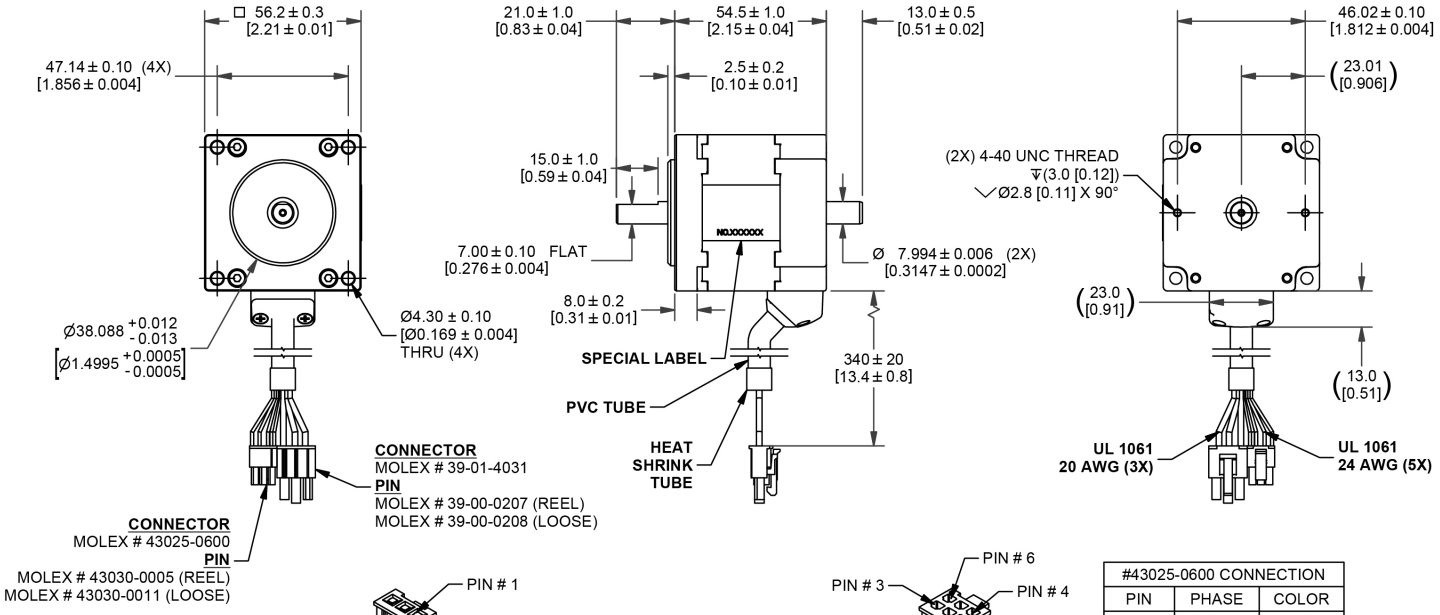




VIEW FROM WIRE ENTRANCE

#39-01-4031 CONNECTION		
PIN	PHASE	COLOR
1	W	BLUE
2	U	ORANGE
3	V	YELLOW



VIEW FROM WIRE ENTRANCE

#43025-0600 CONNECTION		
PIN	PHASE	COLOR
1	VCC(+5V)	RED
2	N/A	N/A
3	Hv	YELLOW
4	Hw	BLUE
5	GND	BLACK
6	Hu	ORANGE

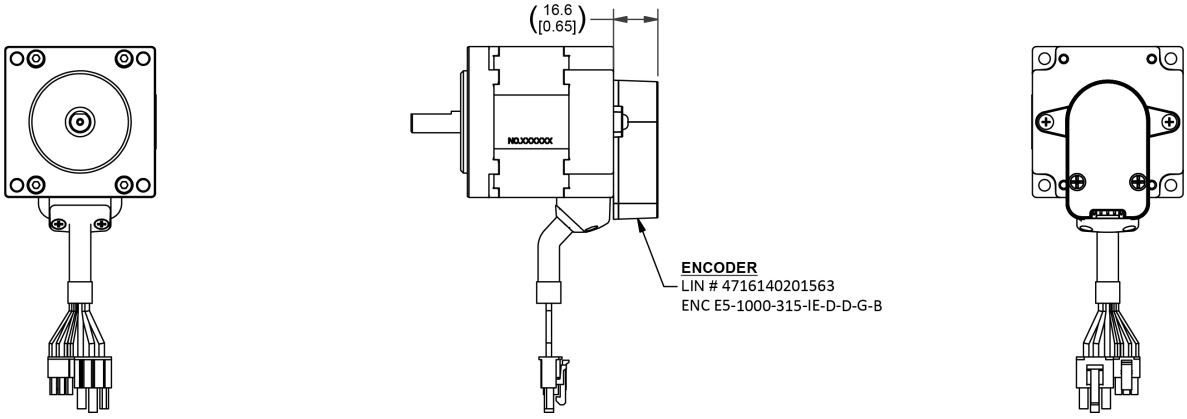

RECOMMENDED PRODUCTS



BLDC DRIVER
BLDC50-BL23E22-01



BLDC EXTENSION CABLE
4201-100/300




E5 ENCODER CABLE
CA-FC10-SH-NC-10-PKG


PERFORMANCE CURVE

BL23E22-01


Rated Voltage: 24Volts, Rated Current: 3.2 Amps

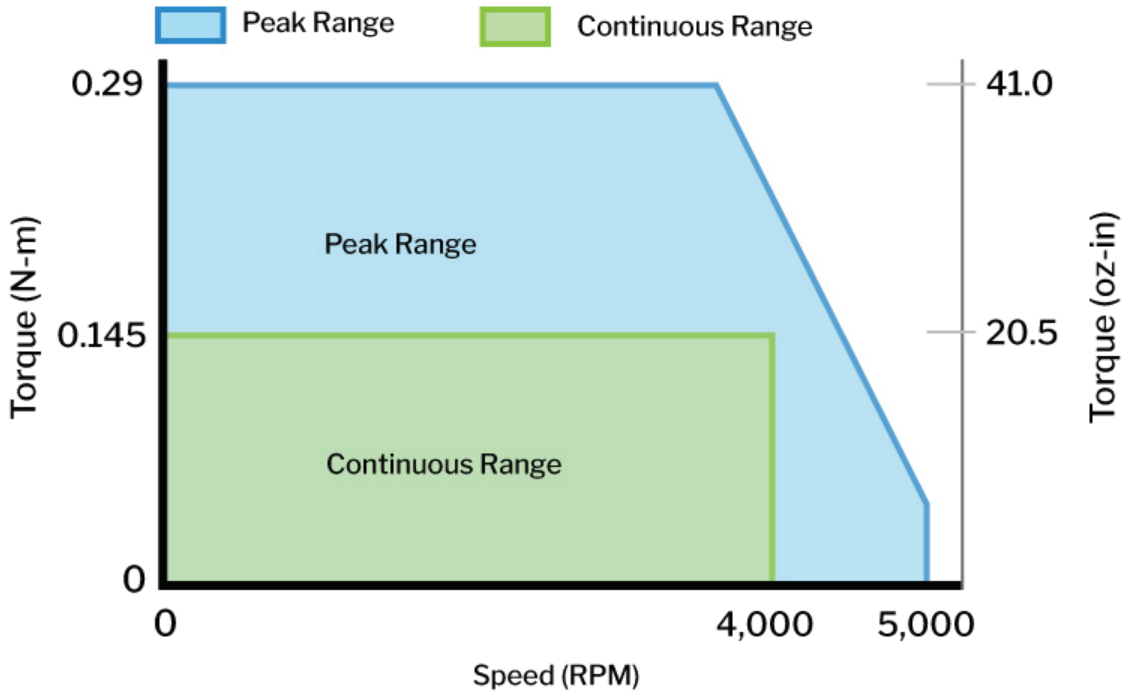


OPERATION & USAGE TIPS



Do not disassemble motors; a significant reduction in motor performance will occur.




Do not machine shafts; this will have a negative effect on shaft run out and perpendicularity.



Do not disconnect motor from drive while in operation.



Do not use holding torque/detent torque of motor as a fail safe brake.



Do not hold motor by lead wires.



Do not exceed the rated current; this wil burn the motor.

FAILURE TO COMPLY WITH THESE RECOMMENDATIONS WILL VOID ALL WARRANTY TERMS

Motion Control, Solved.

MOTOR ENGINEERING & MANUFACTURING

Optimized For Your Application

Quick Prototype Turnaround

Small Batch to OEM Volume Production

US Based Support & Manufacturing