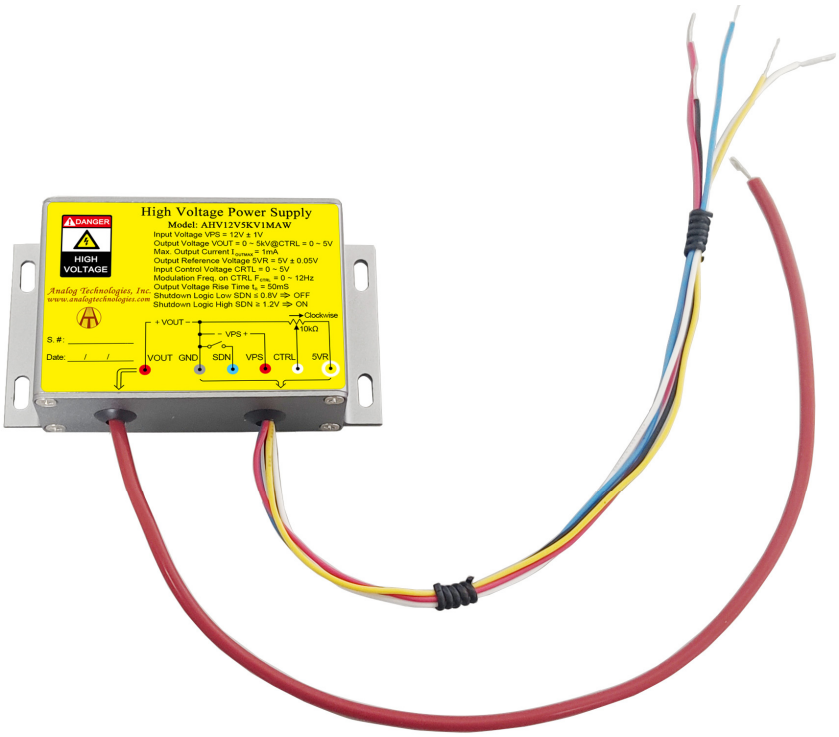


Figure 1.1. Top View of AHV12V5KV1MAW

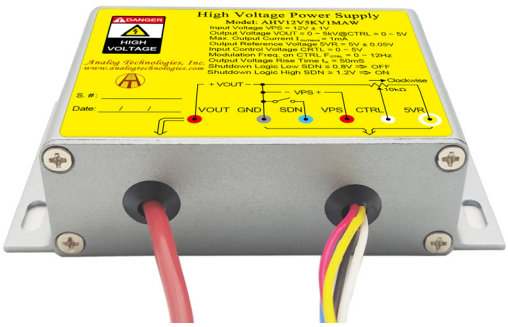


Figure 1.2. Side View

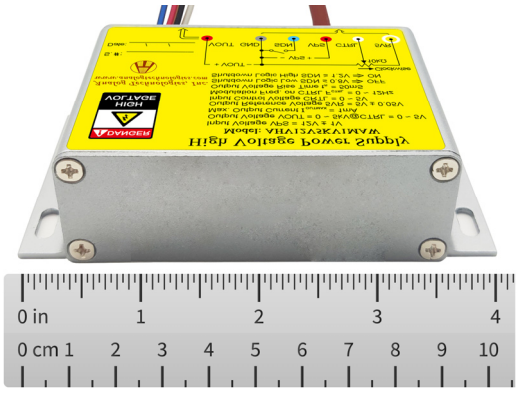


Figure 1.3. Side View

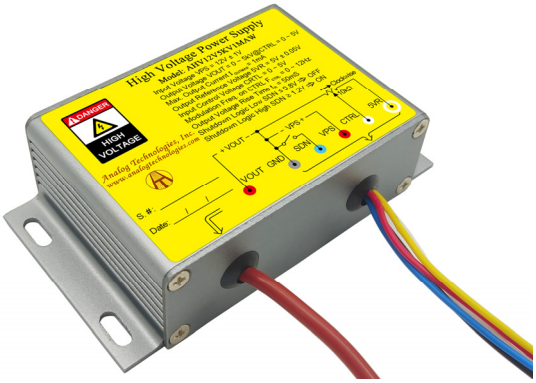


Figure 1.4. Side View

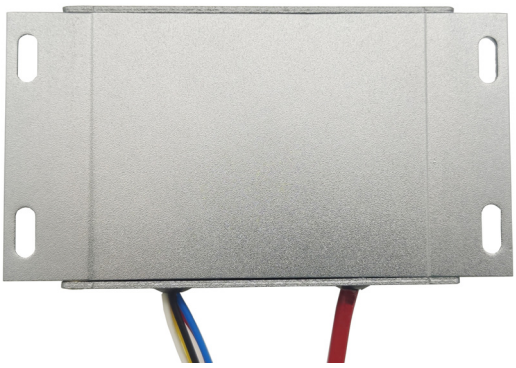


Figure 1.5. Bottom View

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

FEATURES

- Input Power Voltage: 12V ± 1V
- Input Current Range: 100mA to 500mA
- Output Voltage: 0 to 5kV@CTRL = 0 to 5V
- Max. Output Current: 1mA
- Reference Voltage: 5V ± 0.05V
- Input Control Voltage: 0 to 5V
- Full Span Modulation on Output Voltage
- Electronic Shutdown Control

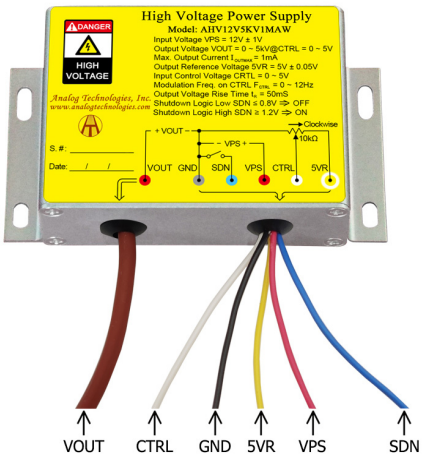


Figure 2. The Connecting Lead Wires of AHV12V5KV1MA

APPLICATIONS

This power module, AHV12V5KV1MAW, is designed for achieving DC-DC conversion from low voltage to high voltage as a power supply source which is widely used in scientific research and other fields including:

- X-ray Machine
- Spectral Analysis
- Nondestructive Inspection
- Semiconductor Manufacturing Equipment
- CRT Monitor Test
- Particle Accelerator
- Capillary Electrophoresis
- Particles Injection
- Semiconductor Technology
- Physical Vapor Phase Deposition
- Radio Frequency Amplification
- Electrospinning Preparation of Nanofiber
- Glass / Fabric Coating
- DC Reactive Magnetron Sputtering
- Cyclotron Accelerator

Table 1. Pin Names, Colors, Functions and Specifications.

No.	Name	Color		Type	Description	Min.	Typ.	Max.
1	SDN	Blue		Digital input	Shutdown logic low	0V		0.8V
					Shutdown logic high	1.2V		5V
2	5VR	Yellow		Analog output	Reference voltage		5V	
3	CTRL	White		Analog input	Regulation	0V		5V
4	VPS	Red		Power input	Input voltage		12V	
5	GND	Black		Ground for analog, digital and power signals.	Ground electrode		0V	
6	VOUT	Brown		Power output	Output high voltage	0V		5kV

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

DESCRIPTION

Figure 2 shows the connecting wires of AHV12V5KV1MAW, of which their detail information given in Table 1. The output voltage can be set to a constant value by connecting the CTRL port to the central tap of a POT (Potentiometer) or modulated by an AC signal ranging from 0V to 5V corresponding to 0V to 5kV proportionally at the output VOUT port as shown in Figure 3 and Figure 4 respectively.

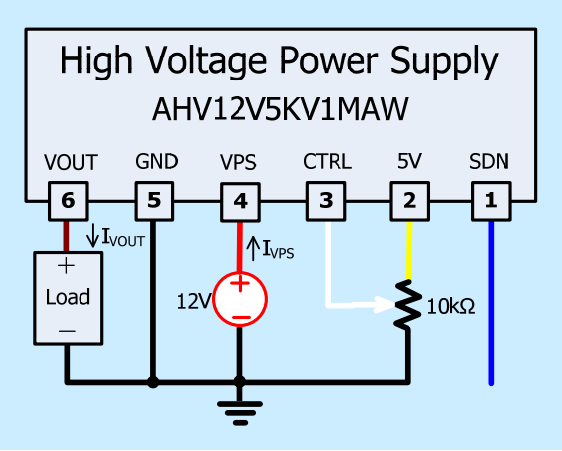


Figure 3. Setting Output to be a Constant Voltage

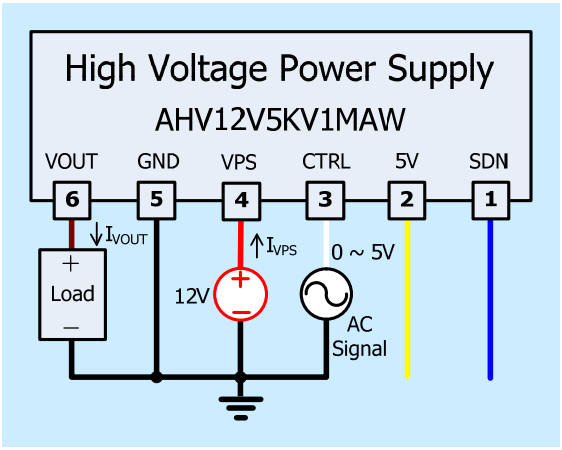


Figure 4. Modulating Output by an AC Signal Source

Please note that the modulation signal must have a low frequency ≤ 10Hz and the value range must be $0V \le V_{CTRL} \le 5V$. The equivalent input circuit for the CTRL is shown in Figure 5.

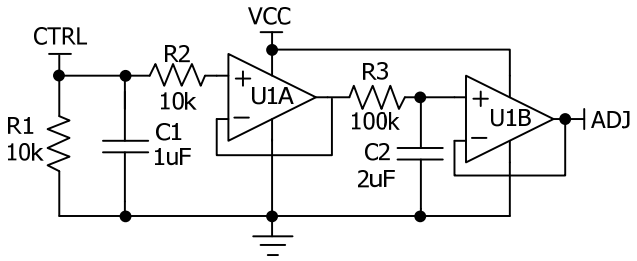


Figure 5. The Equivalent Circuit for CTRL Port

To shutdown AHV12V5KV1MAW, pull down SDN pin to <0.8V; to turn it on, leave SDN pin unconnected or pull it >1.2V. The maximum voltage allowed on the SDN pin is 5V. The equivalent circuit for SDN port is shown in Figure 6.

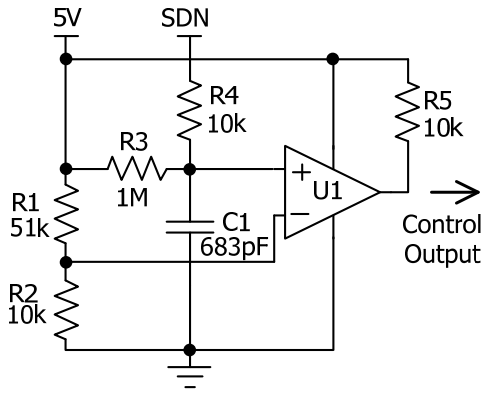


Figure 6. The Equivalent Circuit for SDN Port

USING AHV12V5KV1MAW

This high voltage power supply must be mounted tightly onto a metal plate, ideally, thus expanding its heating sinking capacity of the metal enclosure. Sufficient ventilation must be provided to keep the power supply surface temperature under 55°C.

SAFETY PRECAUTIONS

Although AHV12V5KV1MAW high voltage power supply comes with an over current protection circuit, a short circuit at the output should always be avoided. Make sure the high voltage wire for connecting VOUT node has sufficient insulation capability with its surrounding objects.

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

SPECIFICATIONS

Table 2. Characteristics. T_A = 25°C, unless otherwise noted.

Parameter		Symbol	Test Conditions	Min.	Typ.	Max.	Unit/Note
Input Power Voltage		V_{VPS}		11	12	13	V
Input Power Quiescent Current		I_{VPS_QC}	I_{VOUT} = 0mA	100	110	120	mA
Input Power Current at Full Load		I_{VPS_FL}	I_{VOUT} = 1.0mA	450	500	550	mA
Input Power Current at Shutdown		I_{VPS_SHDN}	T_A = −10°C ~ 55°C		18		mA
Power Supply Rejection Ratio		PSRR (1)	V_{VPS} = 11V ~ 13V V_{CTRL} = V_{5VR} = 5V V_{VOUT} = 5kV I_{VOUT} = 1.0mA		TBD		dB
Modulation Voltage Range Frequency on CTRL		f_{CTRL}		0		12	Hz
Shutdown Port Current		I_{SDNL}	V_{SDNL} < 0.8V	−5		−4.2	μA
		I_{SDNH}	1.2V < V_{SDNL} < 5V	0		3.8	μA
Shutdown Voltage Logic Low		V_{SDNL}		0		0.8	V
Shutdown Voltage Logic High		V_{SDNH}		1.2		5	V
Output Voltage		V_{VOUT}	I_{VOUT} = 0 ~ 1.0mA	0		5000	V
Output Current Range		$I_{VOUTMAX}$	V_{VPS} = 11V ~ 13V	0		1.0	mA
Reference Voltage Output Range		V_{5VR}	T_A = −10°C ~ 55°C I_{5VR} ≤ 5mA	4.98	5	5.02	V
Output Load Range				5		∞	MΩ
Output Voltage Ripple		V_{VOUT_RP}	Bandwidth = 1MHz R_{LOAD} = 5 MΩ	≤2.5			V_{P-P}
Output Voltage Ripple Frequency		f_{VOUT_RP}		TBD			Hz
Output Voltage Temperature Coefficient		TCV_{VOUT} (2)	V_{VPS} = 12V V_{CTRL} = V_{5VR} = 5V V_{VOUT} = 5kV I_{VOUT} = 1mA T_A = −10°C ~ 55°C		≤0.01		%/°C
Output Voltage Range v.s. Temperature		$V_{VOUT}(T)$	V_{VPS} = 12V V_{CTRL} = V_{5VR} = 5V V_{VOUT} = 5kV I_{VOUT} = 1mA T_A = −10°C ~ 55°C	0.99V_{VOUT}	V_{VOUT}	1.01V_{VOUT}	V
Output Voltage Drift	Short Term Drift	$\frac{\lvert\Delta V_{VOUT}/V_{VOUT}\rvert}{\Delta t\ (min)}$	V_{VPS} = 12V V_{CTRL} = V_{5VR} = 5V V_{VOUT} = 5kV I_{VOUT} = 1mA T_A = −10°C ~ 55°C		≤0.5		%/min
	Long Term Drift	$\frac{\lvert\Delta V_{VOUT}/V_{VOUT}\rvert}{\Delta t\ (h)}$			≤1		%/h

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

Output Voltage Rise Time	t_r	V_{VOUT} (t_1) = 500V V_{VOUT} (t_2) = 4500V No-Load		50		ms
		V_{VOUT} (t_1) = 500V V_{VOUT} (t_2) = 4500V R_{Load} =5 MΩ		TBD		ms
Output Voltage Fall Time	t_f	V_{VOUT} (t_2) = 4500V V_{VOUT} (t_3) = 500V No-Load		100		ms
		V_{VOUT} (t_2) = 4500V V_{VOUT} (t_3) = 500V R_{Load} =5 MΩ		TBD		ms
Mean Time Between Failure	MTBF			TBD		h
Instantaneous Short Circuit Current at the Output	I_{VOUT_SC}			≤500		mA
Load Regulation	$\frac{\lvert\Delta V_{VOUT}/V_{VOUT}\rvert}{\Delta I_{VOUT}}$	V_{VOUT} = 5kV I_{VOUT} = 1mA		≤0.05		%/mA
Full Load Efficiency	η (3)	V_{VPS} = 12V V_{VOUT} = 5kV I_{VOUT} = 1mA		≥70		%
Operating Temperature Range	T_{opr}		−10		55	°C
Storage Temperature Range	T_{stg}		−20		85	°C
Thermal resistance housing-ambient	θ_{HA} (4)	V_{VPS} = 12V V_{CTRL} = V_{5VR} = 5V V_{VOUT} = 5kV I_{VOUT} = 1mA		7.5		°C/W
External Dimensions			82×55×28			mm
			3.23×2.17×1.10			inch
Weight				210		g
				0.46		lbs
				7.4		Oz

Note 1: $PSRR = 20\log_{10}\frac{\Delta V_{VOUT}/V_{VOUT}}{\Delta V_{VPS}/V_{VPS}}$ (dB)

ΔV_{VOUT} = V_{VOUT} (V_{VPS} = 12.5V) − V_{VOUT} (V_{VPS} = 11.5V), V_{VOUT} (V_{VPS} = 12.5V) = V_{VOUT} (V_{VPS} = 12V)


ΔV_{VPS} = 12.5V − 11.5V, V_{VPS} = 12V

Note 2: $TCV_{VOUT} = \frac{\lvert\Delta V_{VOUT}\rvert}{V_{VOUT} \times \Delta T}$

Note 3: $\eta = \frac{V_{VOUT} \times I_{VOUT}}{V_{VPS} \times I_{VPS}}$

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

Note 4:

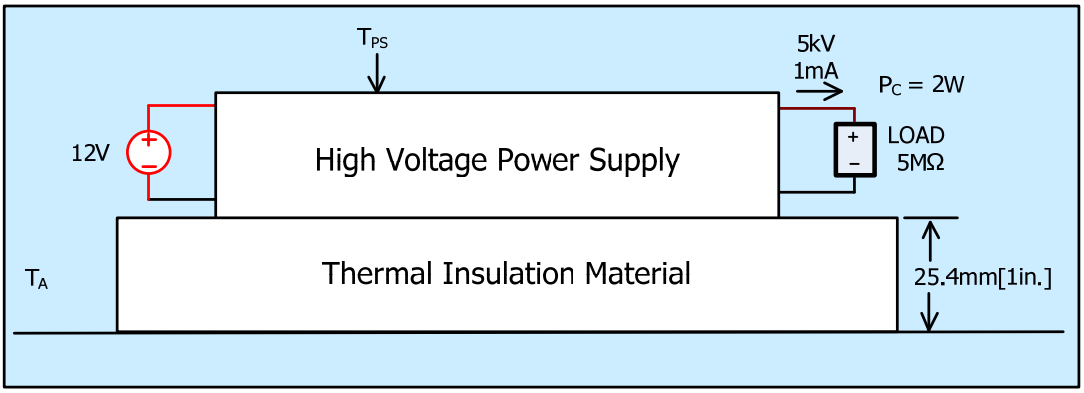

T_{PS} = 29°C, T_A = 14°C, $T_r = T_{PS} - T_A$ = 15°C,

$P_C = P_{VOUT} - P_{VPS}$ = 2W, $\theta_{HA} = T_r/P_C$ = 15°C/2W = 7.5°C/W.

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

TESTING DATA

Test conditions: V_{VPS} = 12V, T_A = 25°C, R_{LOAD} = 5MΩ

DC Testing

The measured output voltage, V_{VOUT}, corresponding to the control port input voltage, V_{CTRL}, is shown in Figure 7.

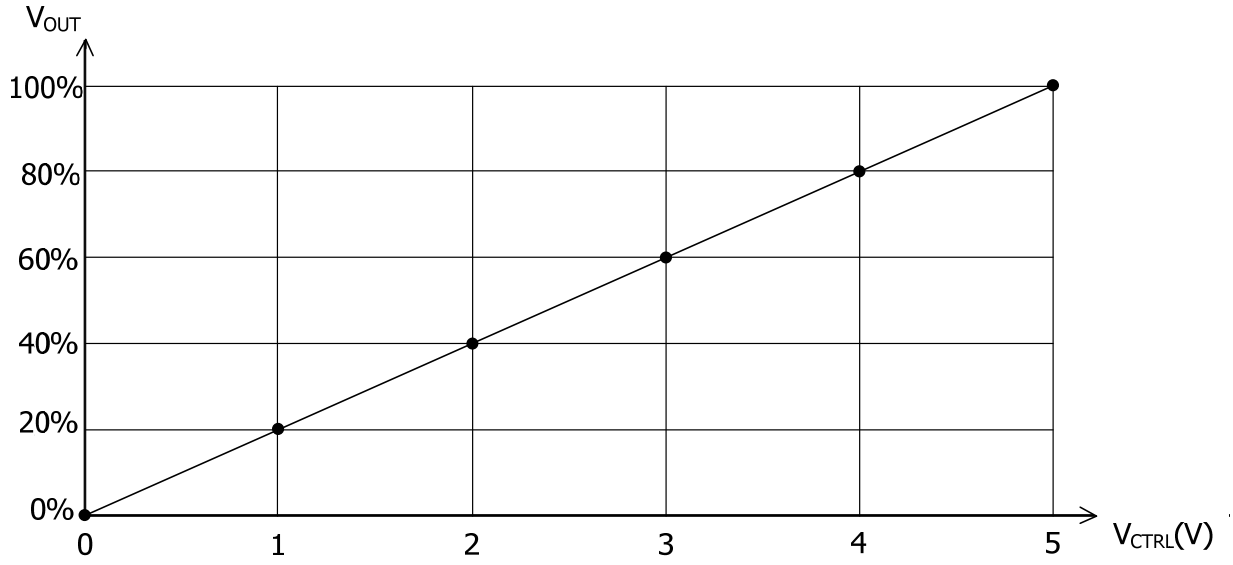


Figure 7. V_{CTRL} vs. V_{VOUT}

AC Testing

To test the analog modulation function, a triangle and sine-wave voltage signals are applied to the CTRL port as the input source signal respectively. Figure 8 and 9 show both the input signal and the output signal waveforms when using the triangle and sine-wave signals at the CTRL port respectively.

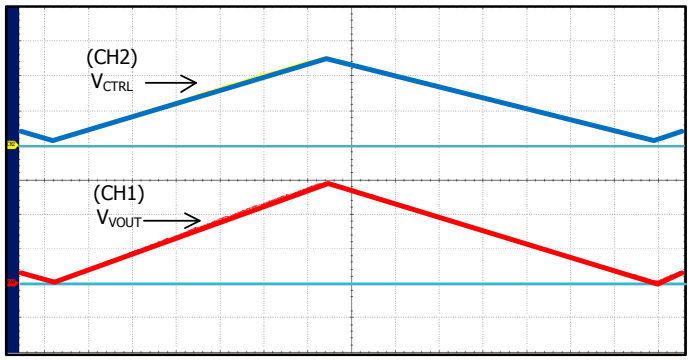


Figure 8. Input vs. Output Waveforms for Triangle Wave Control

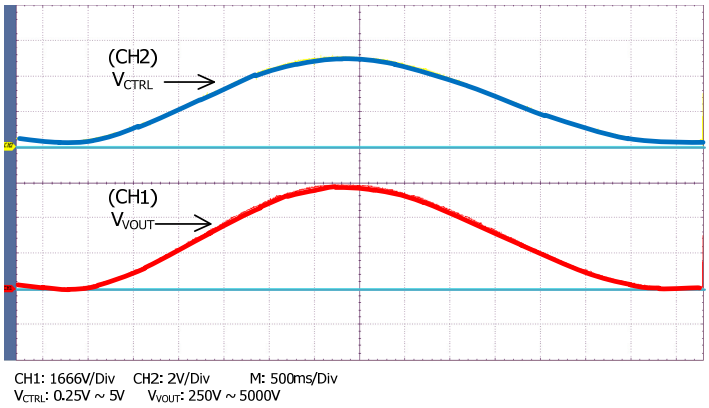


Figure 9. Input vs. Output Waveforms for Sine Wave Control

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

To test the rise and fall times at the output, a step function signal is applied to the CTRL port. The testing results are shown in Figure 10, Figure 11, and Figure 12. As shown in Figure 11 and Figure 12, a square wave of 0.25V ~ 5V, f = 0.10Hz, is applied to CTRL port, the output waveform fall time is measured to be about 100ms and the rise time is about 30ms. These two values are not the same, that is because on the rising trail, the power supply injects a current to the load; while on the falling trail, the best the power supply can do is to stop its output current and let the load resistor drain the output filtering capacitor to a lower voltage, and the draining current is much smaller than the injection current.

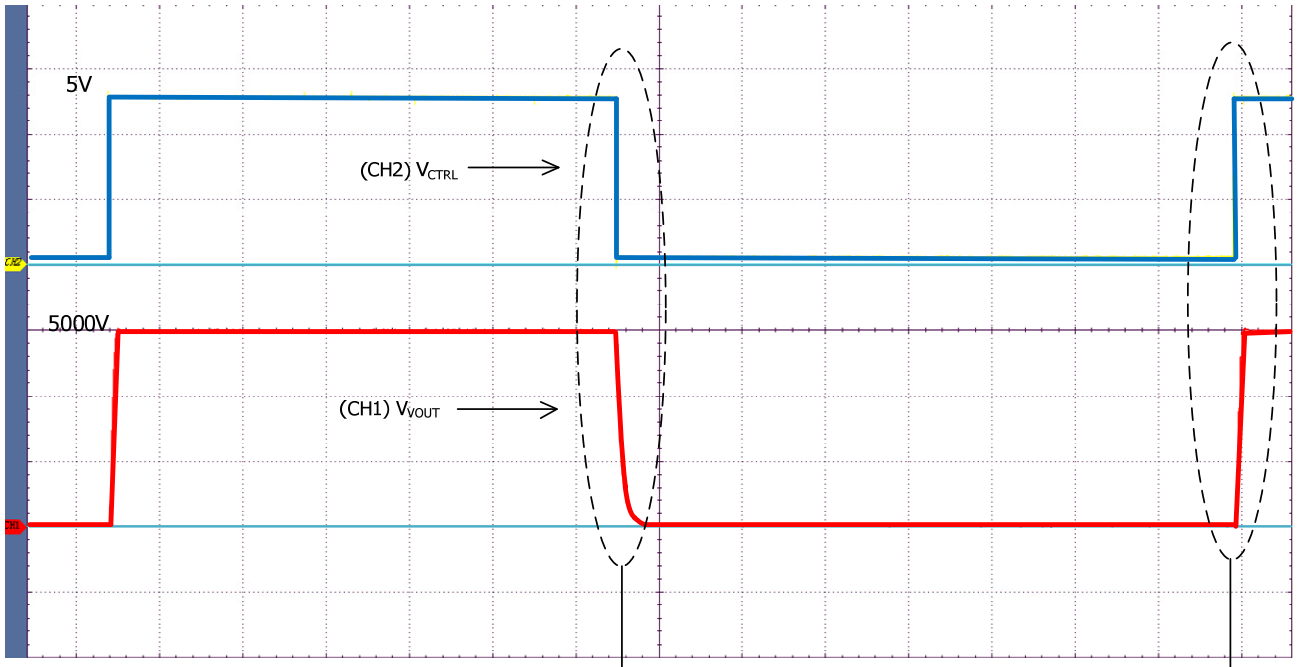


Figure 10. Input vs. Output Waveforms for Square Wave Control

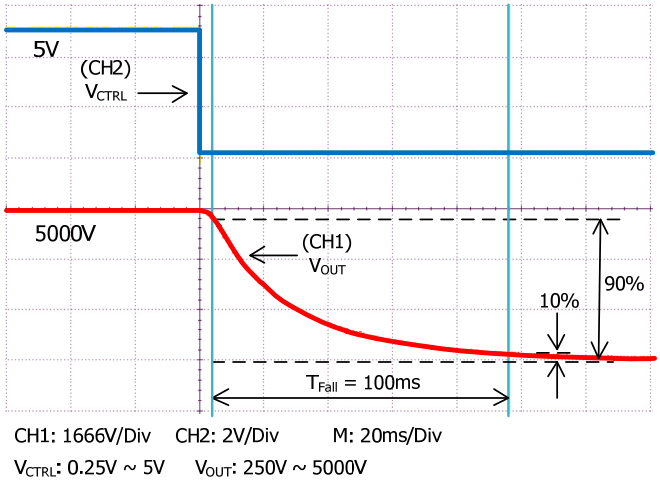


Figure 11. Falling Trail for Large Signal Response


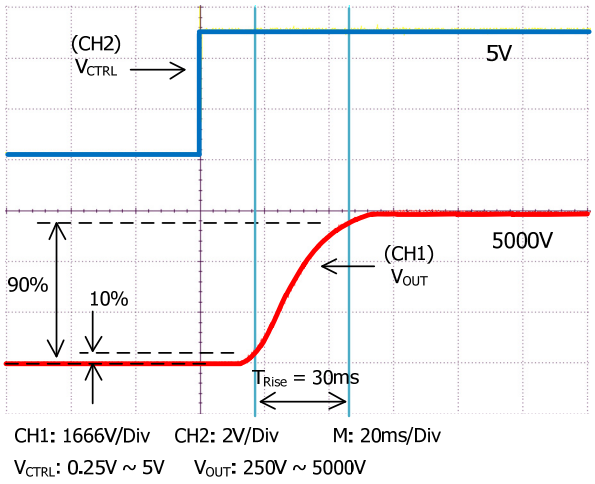


Figure 12. Rising Trail for Large Signal Response

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

NAMING PRINCIPLE

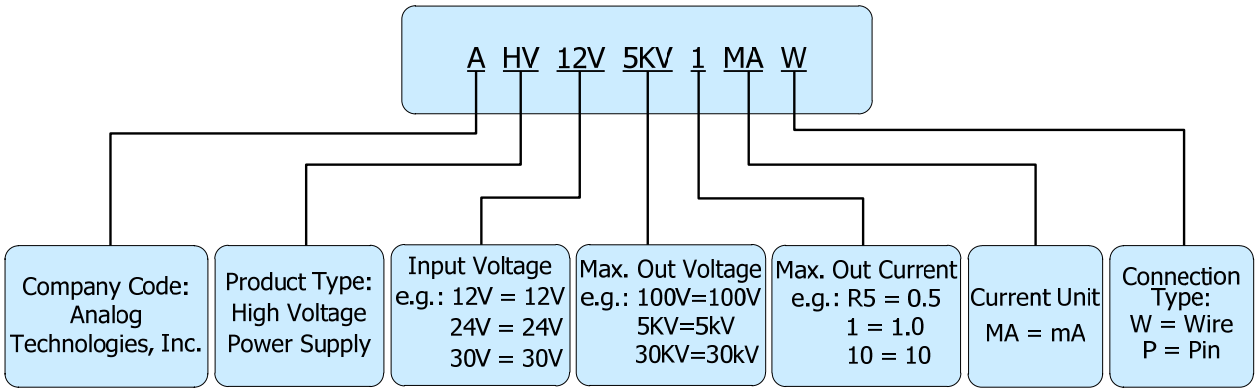

Naming Principle of AHV12V5KV1MAW

DIMENSIONS

Connecting Lead Wire Sizes and Lengths

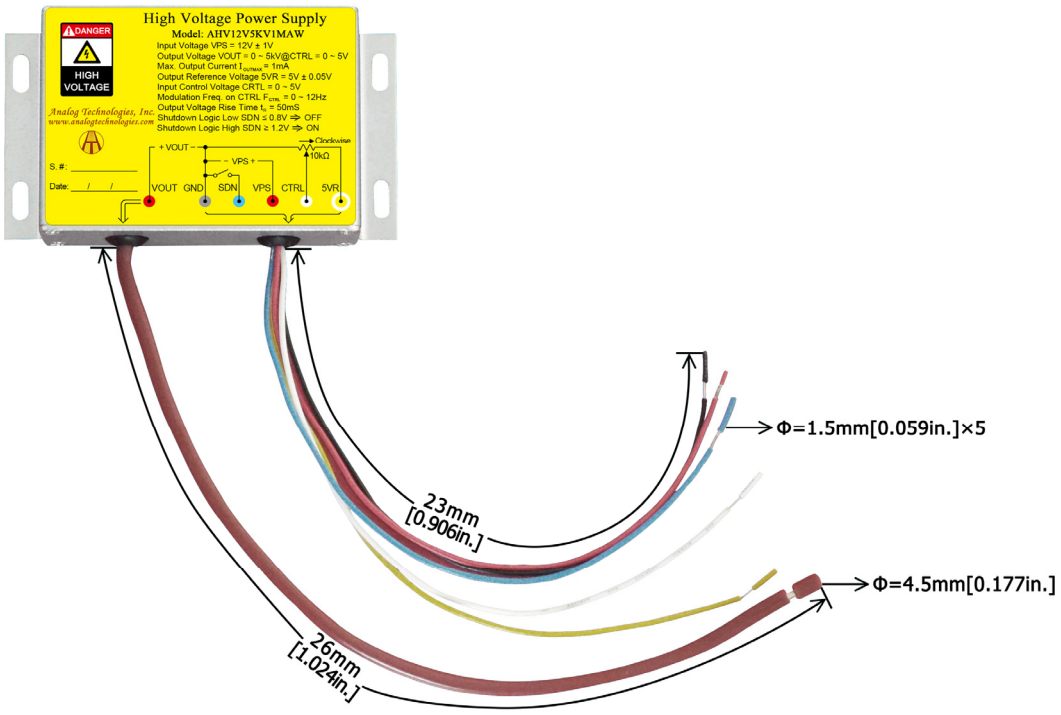


Figure 13. Connecting Lead Wires of AHV12V5KV1MAW

Lead Wires	Diameter		Length	
	mm	inch	mm	inch
Thick brown lead wire	4.5	0.177	26 ± 1	1.024 ± 0.039
Yellow, red, blue, black and white lead wires	1.5	0.059	23 ± 1	0.906 ± 0.039

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

Outline Dimensions

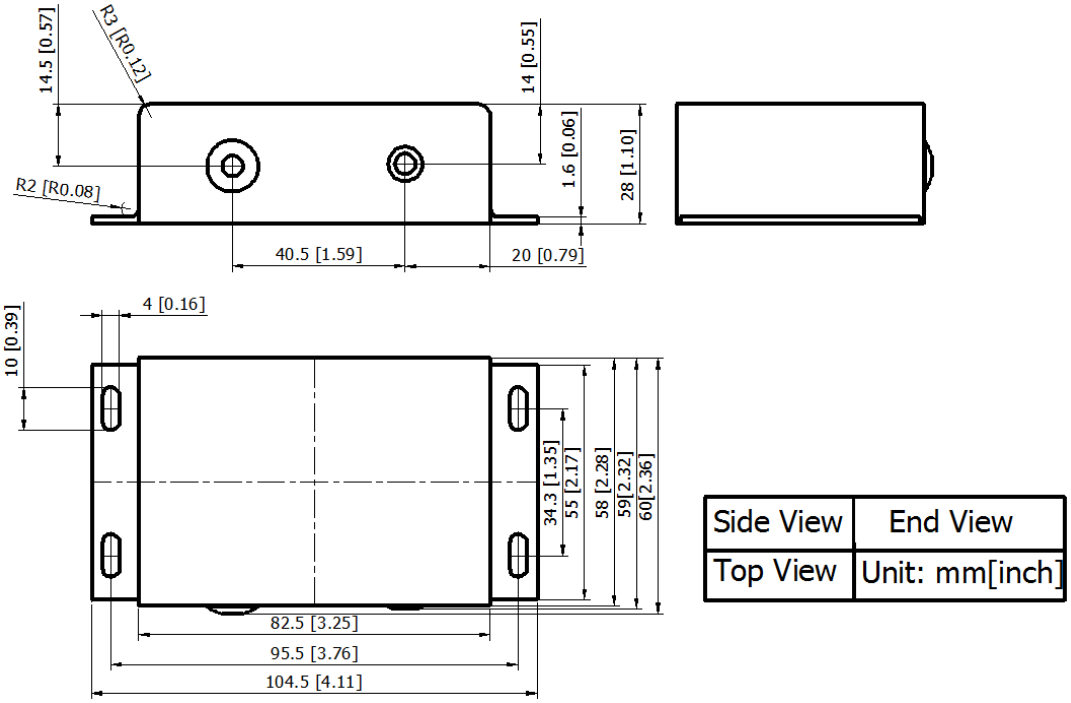


Figure 14. Outline Dimensions

ORDERING INFORMATION

Quantity	1~9pcs	10~49pcs	50~99pcs	≥100pcs
AHV12V5KV1MAW	$135	$123	$111	$99

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021

NOTICE

1. ATI warrants performance of its products for one year to the specifications applicable at the time of sale, except for those being damaged by excessive abuse. Products found not meeting the specifications within one year from the date of sale can be exchanged free of charge.
2. ATI reserves the right to make changes to its products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current and complete.
3. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability. Testing and other quality control techniques are utilized to the extent ATI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.
4. Customers are responsible for their applications using ATI products. In order to minimize risks associated with the customers' applications, adequate design and operating safeguards must be provided by the customers to minimize inherent or procedural hazards. ATI assumes no liability for applications assistance or customer product design.
5. ATI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of ATI covering or relating to any combination, machine, or process in which such products or services might be or are used. ATI's publication of information regarding any third party's products or services does not constitute ATI's approval, warranty or endorsement thereof.
6. IP (Intellectual Property) Ownership: ATI retains the ownership of full rights for special technologies and/or techniques embedded in its products, the designs for mechanics, optics, plus all modifications, improvements, and inventions made by ATI for its products and/or projects.

©Copyrights 2000-2021, Analog Technologies, Inc. All Rights Reserved. Updated on 11/10/2021