

# AksIM-2

## Off-Axis Rotary Absolute Magnetic Encoder


HIGH  
ACCURACY

HIGH SPEED

MULTITURN  
COUNTER

AksIM-2 is a non-contact, high performance off-axis absolute rotary encoder designed for integration into applications with limited space. A hollow ring, true absolute functionality and high-speed operation make this encoder suitable for many applications.

The AksIM-2 encoder system consists of an axially magnetised ring and a readhead. The encoders are equipped with BiSS, Asynchronous serial (UART), SPI, PWM or SSI communication interfaces and offer a range of binary resolutions up to 20 bits per revolution.

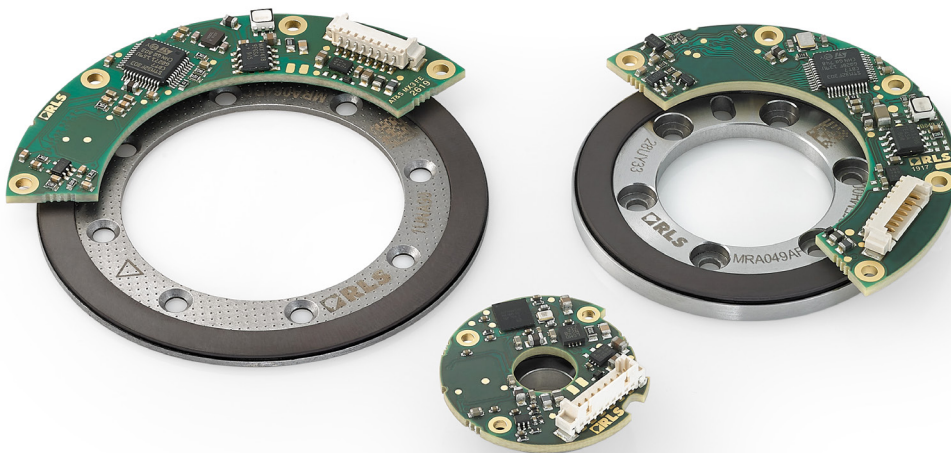

## Features and benefits

- ▶ True absolute system
- ▶ Custom magnetic sensor ASIC
- ▶ Self-calibration option
- ▶ No hysteresis
- ▶ Resolution up to 20 bits
- ▶ Multiturn counter option
- ▶ High speed operation
- ▶ Low profile, non-contact
- ▶ Integrated status LED
- ▶ High repeatability



COLLABORATIVE ROBOTS



AGVs



GIMBALS



ROBOTIC JOINTS




AGRICULTURAL  
AUTOMATION

# General information

The AksIM-2 encoder operates in a temperature range between -40 °C and +105 °C and is highly resistant to shock and vibration. It has a built-in advanced self-monitoring function that continuously checks several internal parameters. Error reports, warnings and other status signals are available on all communication interfaces and visualised with the on-board LED.

The AksIM-2 encoder system is suitable for use in industrial and medical applications. A typical application is a robotic arm joint with a cable feed through the ring, or a precision gearbox where the ring is mounted on the main transmission shaft.

A custom design service for OEM integration is also available.

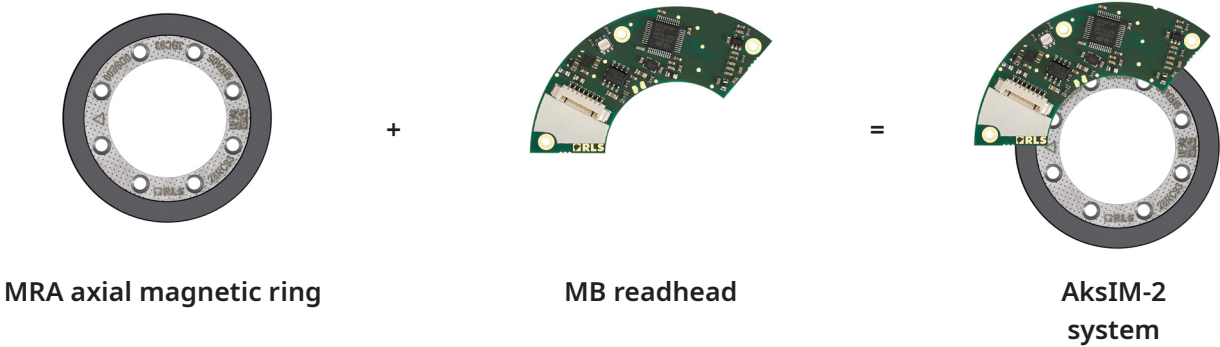

| Selection guide  | Magnetic ring  |                      |                |           |                    | Readhead       |                      |                |            |                |                         |          |
|------------------|----------------|----------------------|----------------|-----------|--------------------|----------------|----------------------|----------------|------------|----------------|-------------------------|----------|
| Part number      | Inner diameter | Circle for fasteners | Outer diameter | Thickness | Inertia (kg × mm²) | Inner diameter | Circle for fasteners | Outer diameter | Arc length | Max resolution | System thickness (Typ.) | Mass (g) |
| MB022 Assembly   |                |                      |                |           |                    |                |                      |                |            |                |                         |          |
| MB022 shape G    |                |                      |                |           |                    | 8.5            | 24                   | 28.5           | 360°       | 17 bit         |                         | 2.7      |
| MRA022HP008DMN00 | 8              | none                 | 21.5           | 5.4       | 0.36               |                |                      |                |            |                | 12.45                   | 7.0      |
| MB029 Assembly   |                |                      |                |           |                    |                |                      |                |            |                |                         |          |
| MB029 shape F    |                |                      |                |           |                    | 14             | 35.4                 | 38             | 360°       | 18 bit         |                         | 4.5      |
| MRA029BC010DSE00 | 10             | 15                   | 29             | 2.0       | 0.75               |                |                      |                |            |                | 7.85                    | 5.9      |
| MRA029GP013DMN00 | 12.7           | none                 | 29             | 7.0       | 1.0                |                |                      |                |            |                | 12.85                   | 9.0      |
| MB039 Assembly   |                |                      |                |           |                    |                |                      |                |            |                |                         |          |
| MB039 shape E    |                |                      |                |           |                    | 23             | 49                   | 54             | 196°       | 19 bit         |                         | 4.8      |
| MRA039BC020DSE00 | 20             | 25                   | 39             | 2.0       | 2.3                |                |                      |                |            |                | 7.85                    | 9.2      |
| MB049 Assembly   |                |                      |                |           |                    |                |                      |                |            |                |                         |          |
| MB049 shape D    |                |                      |                |           |                    | 34             | 54                   | 59             | 190°       | 19 bit         |                         | 4.5      |
| MB049 shape E    |                |                      |                |           |                    | 26             | 54                   | 59             | 138°       | 19 bit         |                         | 4.2      |
| MRA049BC025DSE00 | 25             | 31                   | 49             | 2.0       | 5.5                |                |                      |                |            |                | 7.85                    | 15       |
| MRA049AF025EMH00 | 25             | 31                   | 49             | 3.9       | 13                 |                |                      |                |            |                | 9.75                    | 32       |
| MRA049BG034DSN00 | 34             | none                 | 49             | 2.0       | 4.8                |                |                      |                |            |                | 7.85                    | 11       |
| MB053 Assembly   |                |                      |                |           |                    |                |                      |                |            |                |                         |          |
| MB053 shape E    |                |                      |                |           |                    | 36             | 66                   | 74             | 130°       | 20 bit         |                         | 5.3      |
| MRA053BC030DSE00 | 30             | 36                   | 53             | 2.0       | 7.4                |                |                      |                |            |                | 7.85                    | 16       |
| MRA053BG040DSN00 | 40             | none                 | 53             | 2.0       | 5.9                |                |                      |                |            |                | 7.85                    | 11       |
| MB064 Assembly   |                |                      |                |           |                    |                |                      |                |            |                |                         |          |
| MB064 shape D    |                |                      |                |           |                    | 48             | 69                   | 74             | 140°       | 20 bit         |                         | 6.9      |
| MRA064BC040DSE00 | 40             | 46                   | 64             | 2.0       | 15                 |                |                      |                |            |                | 7.85                    | 20       |
| MB080 Assembly   |                |                      |                |           |                    |                |                      |                |            |                |                         |          |
| MB080 shape D    |                |                      |                |           |                    | 64.4           | 85                   | 90             | 97°        | 20 bit         |                         | 4.0      |
| MRA080BC055DSE00 | 55             | 61.5                 | 80             | 2.0       | 32                 |                |                      |                |            |                | 7.85                    | 26       |
| MRA080AF055EMH00 | 55             | 61.5                 | 80             | 3.9       | 74                 |                |                      |                |            |                | 9.75                    | 64       |
| MRA080BG064DSN00 | 64             | none                 | 80             | 2.0       | 12.8               |                |                      |                |            |                | 6.05                    | 19       |
| MRA080DF068DMH00 | 68             | 88                   | 95             | 4.9       | 114                |                |                      |                |            |                | 10.75                   | 72       |

# Storage and handling

## Storage temperature



–40 °C to +105 °C

## Operating temperature




–40 °C to +105 °C  
–40 °C to +85 °C (MB022 only)

## Humidity



Up to 70 % non-condensing

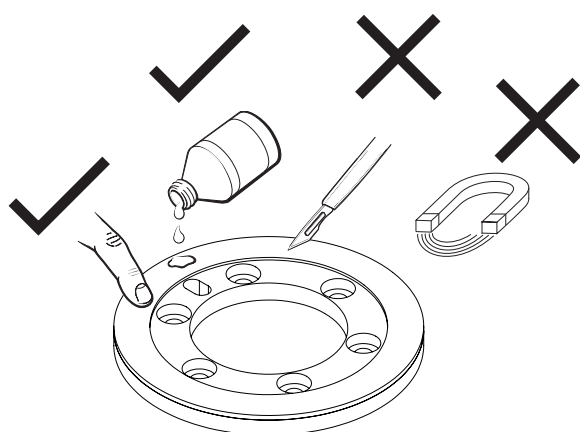

**HANDLE WITH CARE.** This encoder system is a high performance metrology product and should be treated with the same care as any other precision instrument. Use of heavy duty industrial tools or exposure to strong magnets, such as a magnetic base, is unacceptable and risks of irreparable damage to the product.

**The magnetic ring should not be exposed to magnetic field densities higher than 50 mT on its surface, as this can damage the ring.**

Please see [Chemical resistance](#) or [contact RLS](#).



### Readhead is ESD sensitive - handle with care.

Do not touch electronic circuit, wires or sensor area without proper ESD protection or outside of ESD controlled environment.

## Packaging

There are two packaging options. Less than 20 products are packed individually in an antistatic box. If more than 20 systems are ordered, the parts are packed in antistatic plastic trays. Magnetic rings and readheads are packed separately.

### Bulk packaging:


| Readheads |                   |                  |
|-----------|-------------------|------------------|
| Part      | Tray size         | Box size         |
| MB022     | 32 units per tray | 8 trays per box  |
| MB029     | 18 units per tray | 10 trays per box |
| MB039     | 16 units per tray |                  |
| MB049-E   | 20 units per tray |                  |
| MB049-D   | 16 units per tray |                  |
| MB053     | 12 units per tray |                  |
| MB064-E   | 12 units per tray |                  |
| MB064-D   | 10 units per tray |                  |
| MB080     | 15 units per tray |                  |

| Magnetic rings |                   |                  |
|----------------|-------------------|------------------|
| Part           | Tray size         | Box size         |
| MRA022         | 45 units per tray | 10 trays per box |
| MRA029         |                   |                  |
| MRA039         |                   |                  |
| MRA049-D       | 10 units per tray | 12 trays per box |
| MRA049-E       |                   |                  |
| MRA053         |                   |                  |
| MRA064-E       |                   |                  |
| MRA064-D       | 5 units per tray  | 12 trays per box |
| MRA080         |                   |                  |


## Dimensions and installation drawings

Dimensions and tolerances are in mm.

### Encoder assembly MB022 readhead with MRA022HP008DMN00 magnetic ring

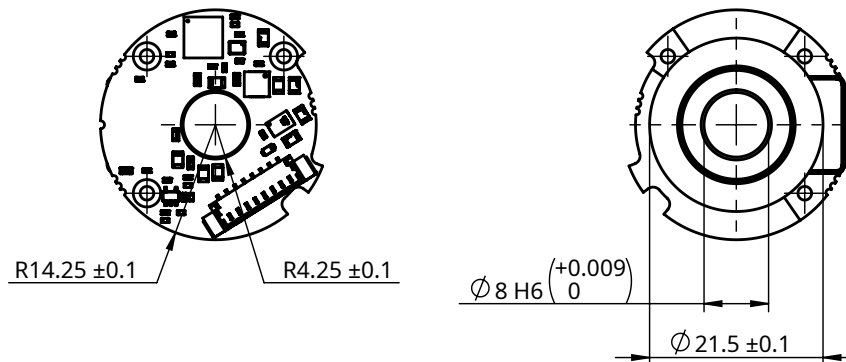


#### Detail A

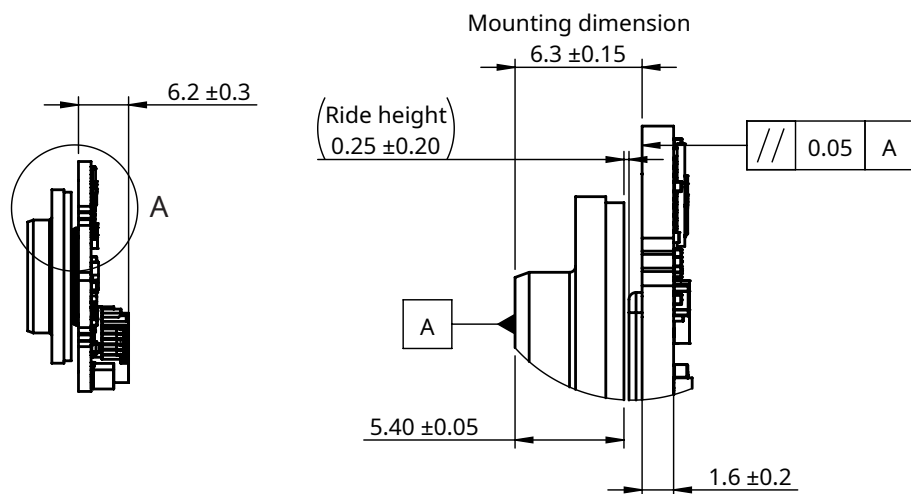


Ride height influences noise on the output. See chapter **Installation instructions** for details.

**MB022 readhead**

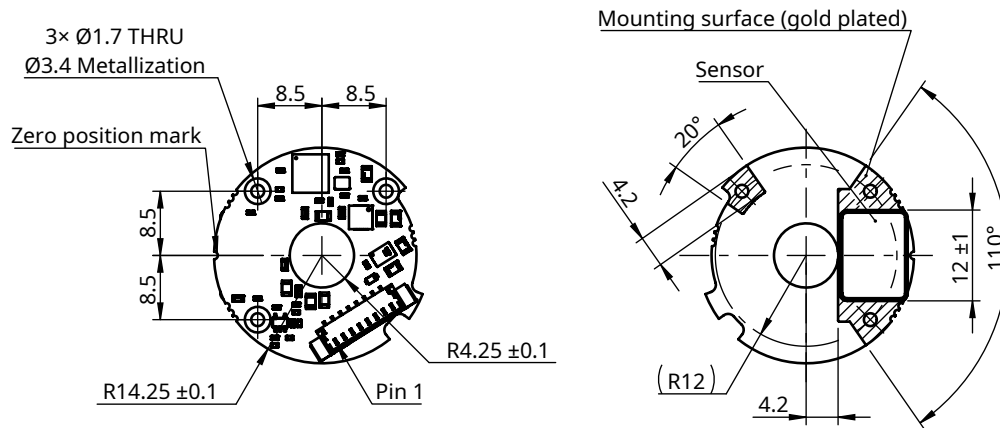


**MRA022HP008DMN00 magnetic ring**

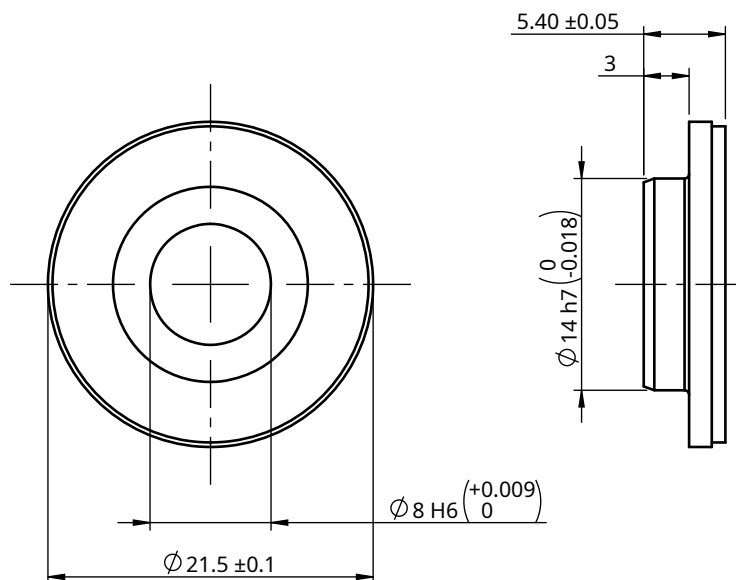


Press-fit mounting to shaft D8: recommended shaft OD tolerance is r6 (+0.019 / +0.028)




Encoder assembly MB029 readhead with MRA029BC010DSE00 magnetic ring

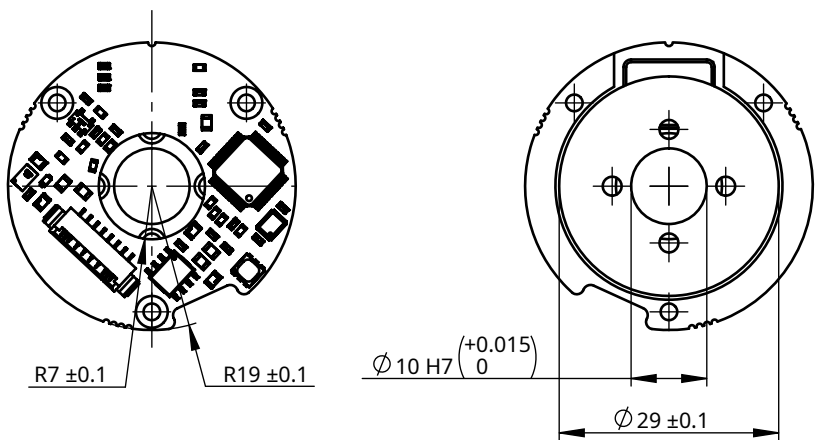

Detail A

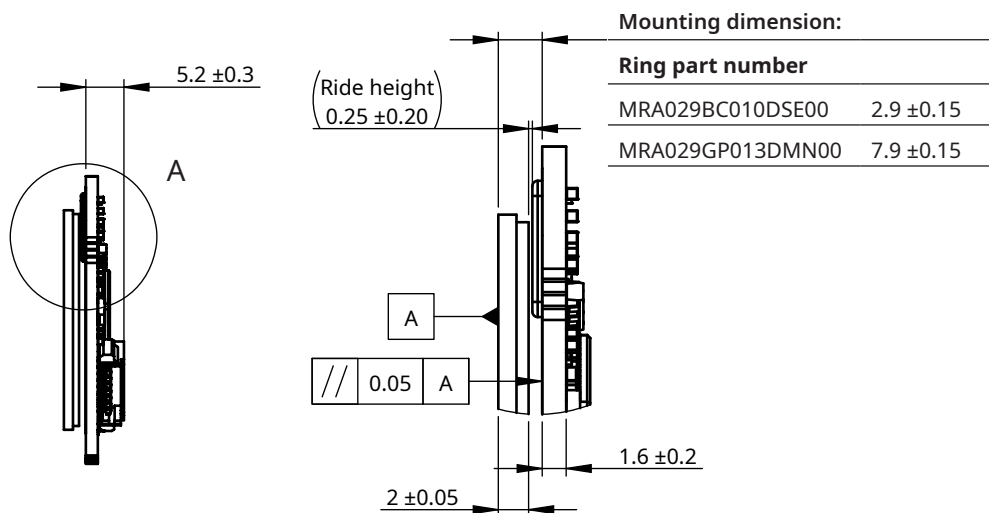


Ride height influences noise on the output. See chapter [Installation instructions](#) for details.

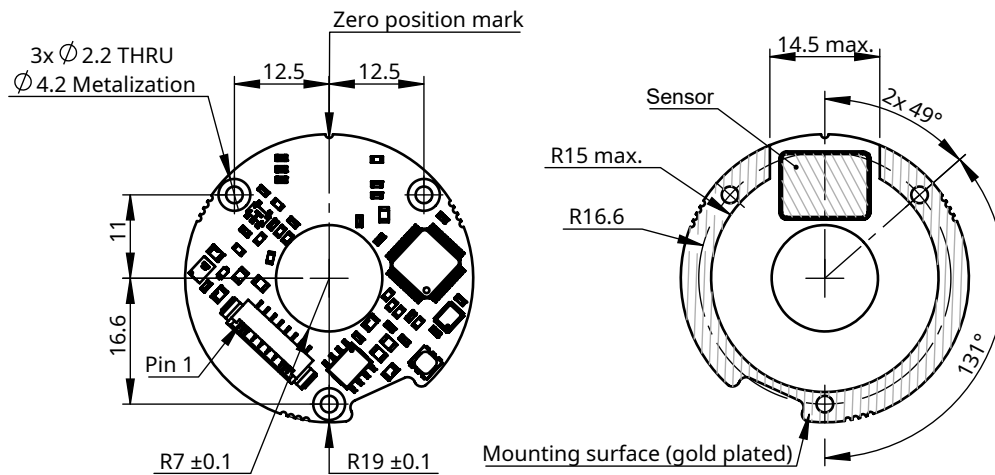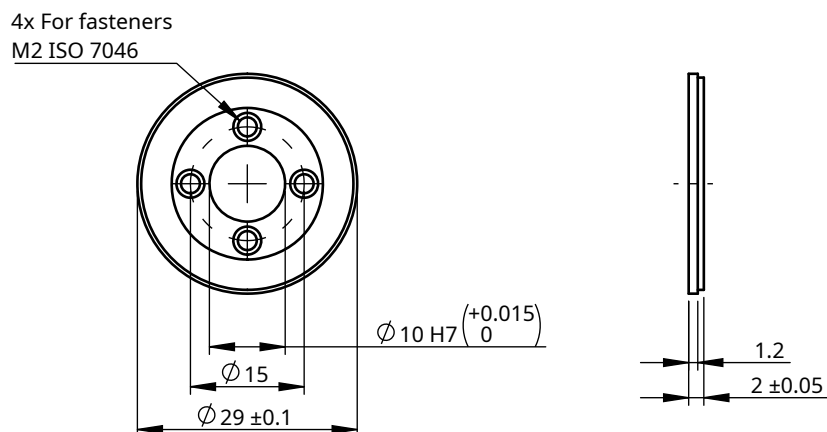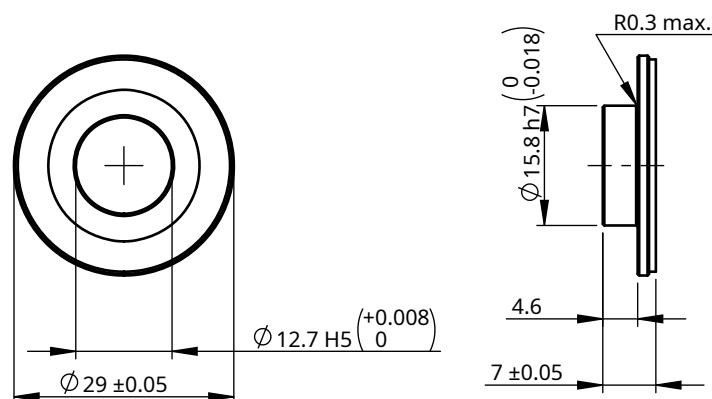**MB029 readhead**

**MRA029BC010DSE00 magnetic ring**

**MRA029GP013DMN00 magnetic ring**

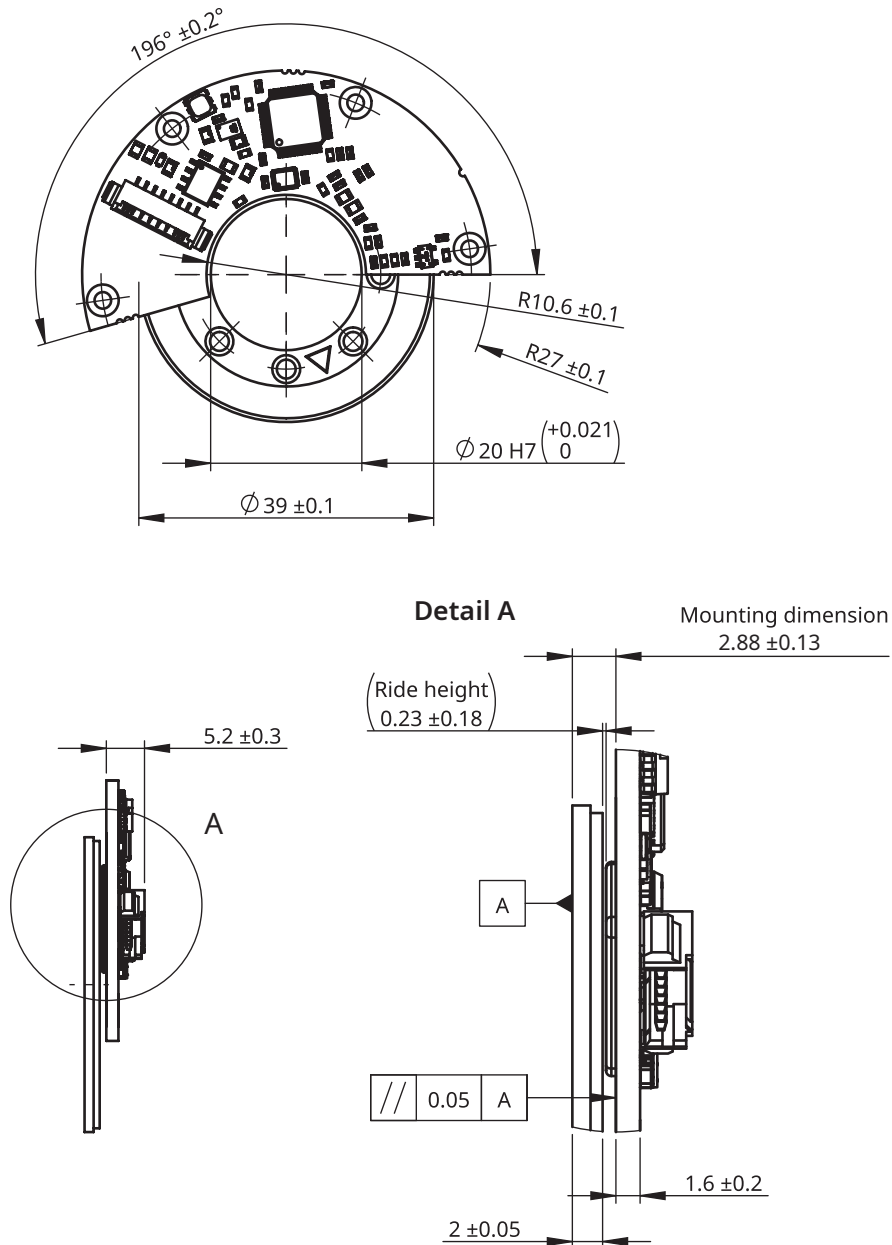
Press-fit mounting to shaft  $\varnothing 12.7$ : recommended shaft OD tolerance is p7 (+0.018 / +0.036)


## Encoder assembly MB039 readhead with MRA039BC020DSE00 magnetic ring




Ride height influences noise on the output. See chapter **Installation instructions** for details.




# MB039 readhead

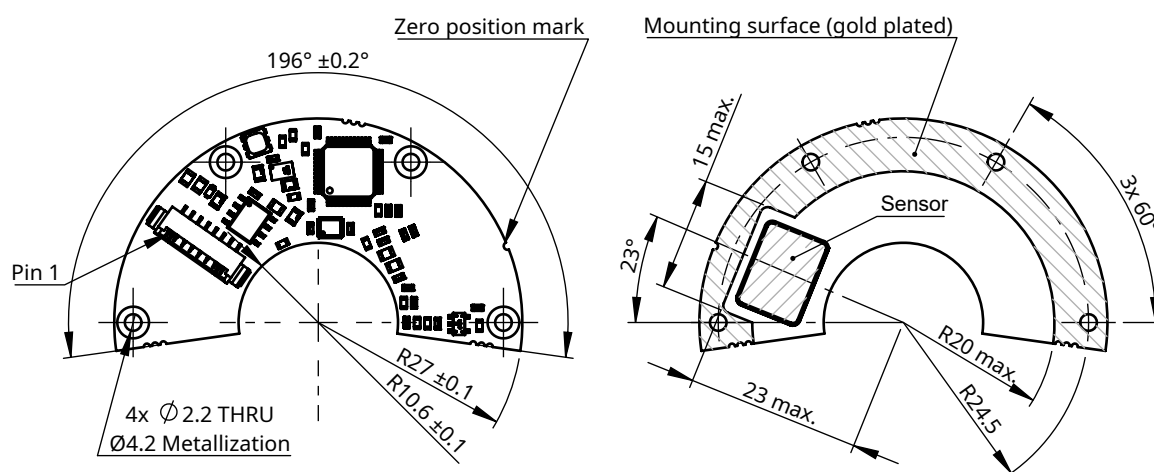


# MRA039BC020DSE00 magnetic ring

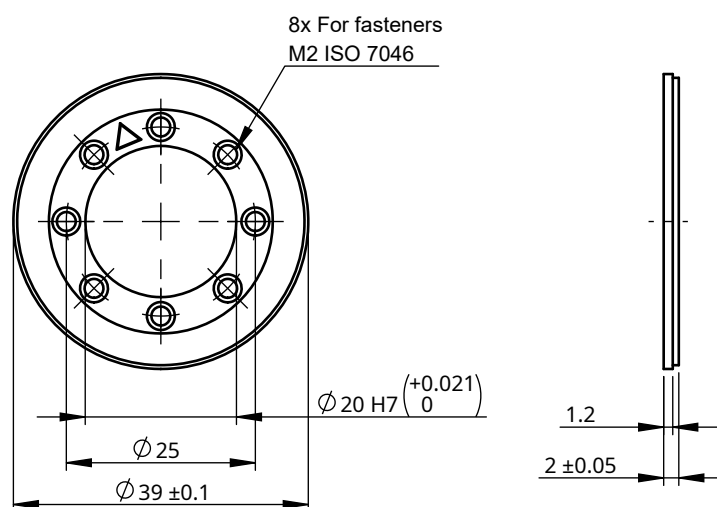

Encoder assembly MB049 readhead shape D and readhead shape E with  
MRA049BC025DSE00 magnetic ring


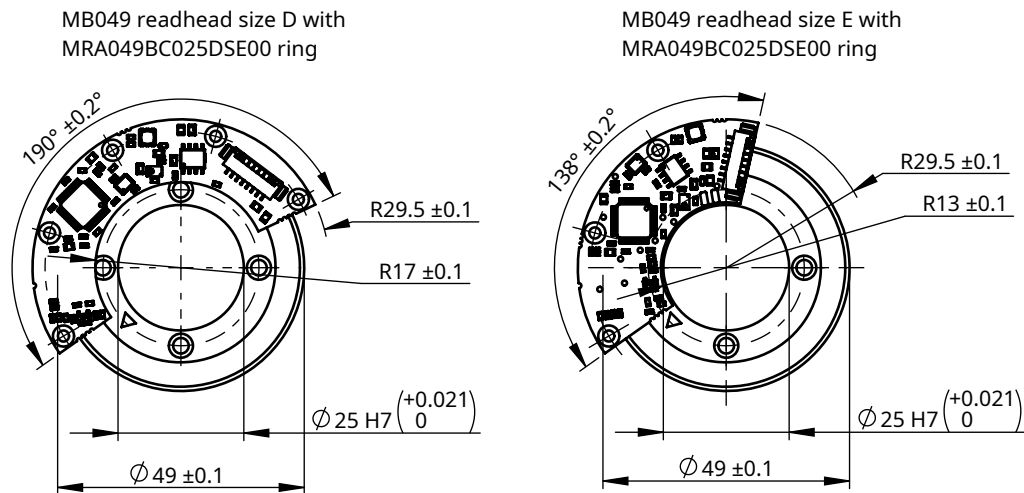


Detail A


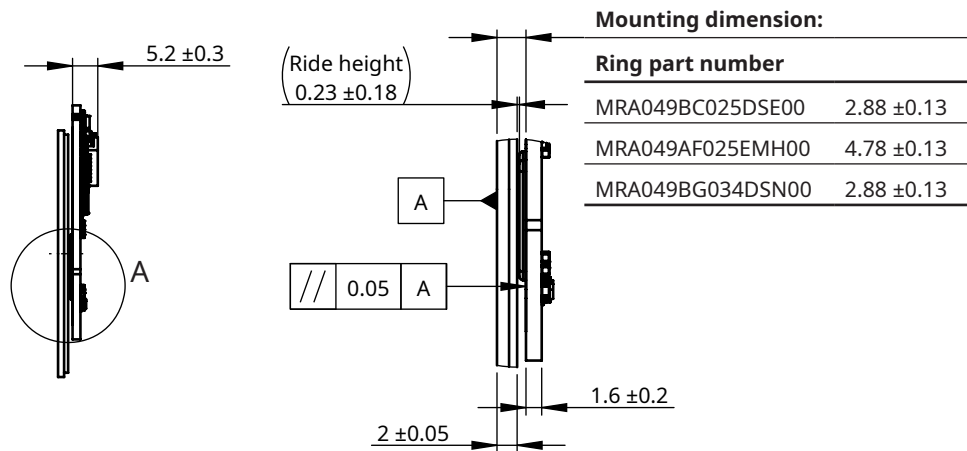


Ride height influences noise on the output. See chapter **Installation instructions** for details.

**MB049 readhead shape E**

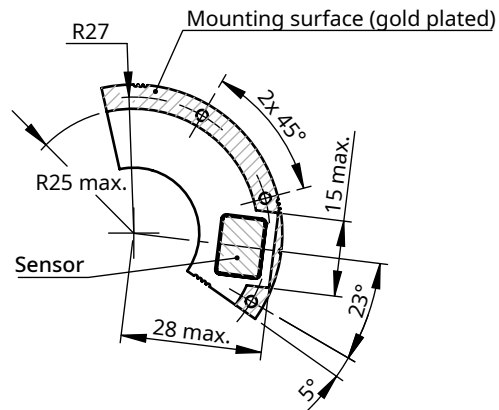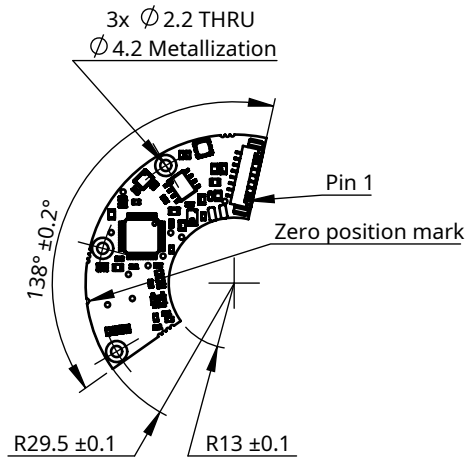


**MB049 readhead shape D**

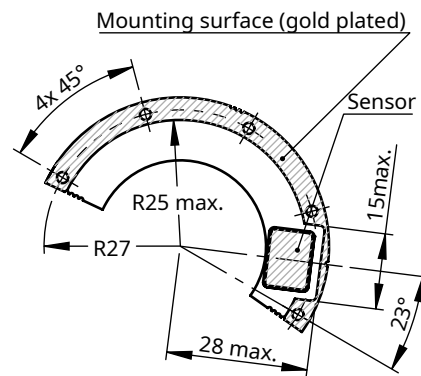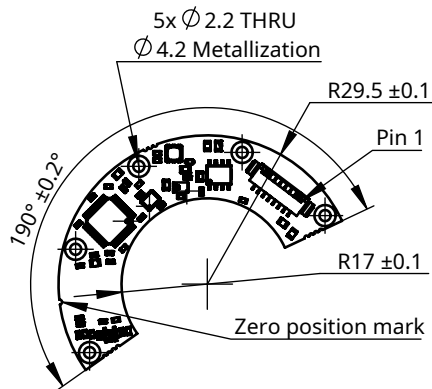


Dimensions and installation drawings continued

**MRA049BC025DSE00 magnetic ring**

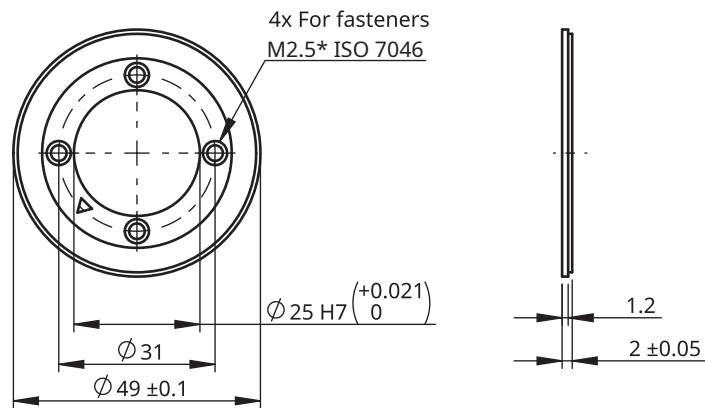


\* Also possible with suitable M2.

**MRA049AF025EMH00 magnetic ring**

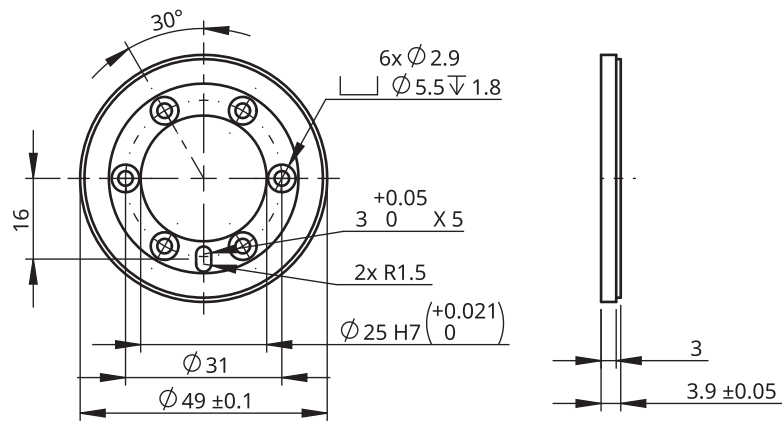


**MRA049BG034DSN00 magnetic ring**


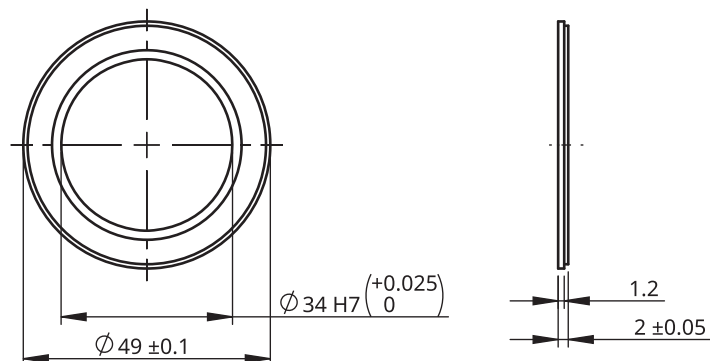


Mounting with glue. See chapter [installation instructions](#) for more details.

## Encoder assembly MB053 readhead shape E with MRA053BC030DSE00 magnetic ring


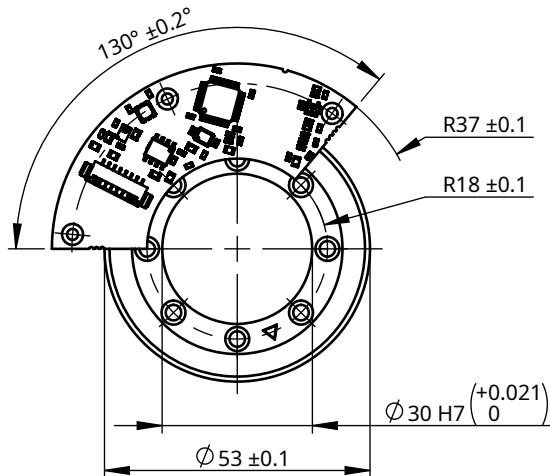


**Detail A**

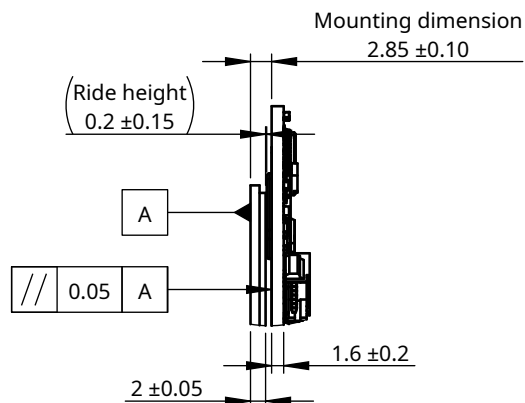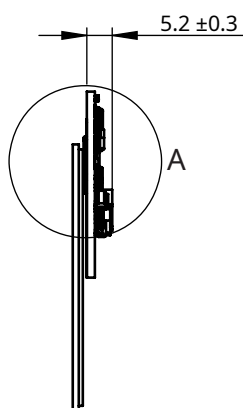


Ride height influences noise on the output. See chapter **Installation instructions** for details.

### MB053 readhead shape E

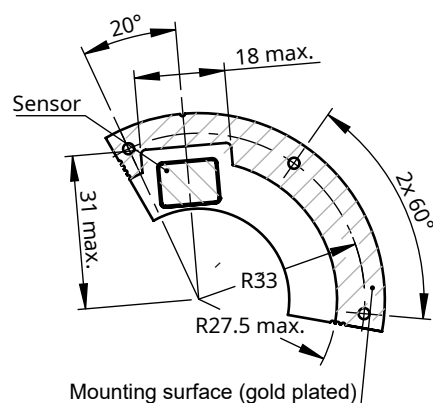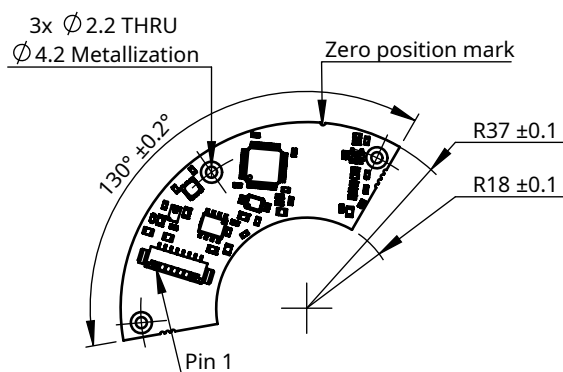


### MRA053BC030DSE00 magnetic ring

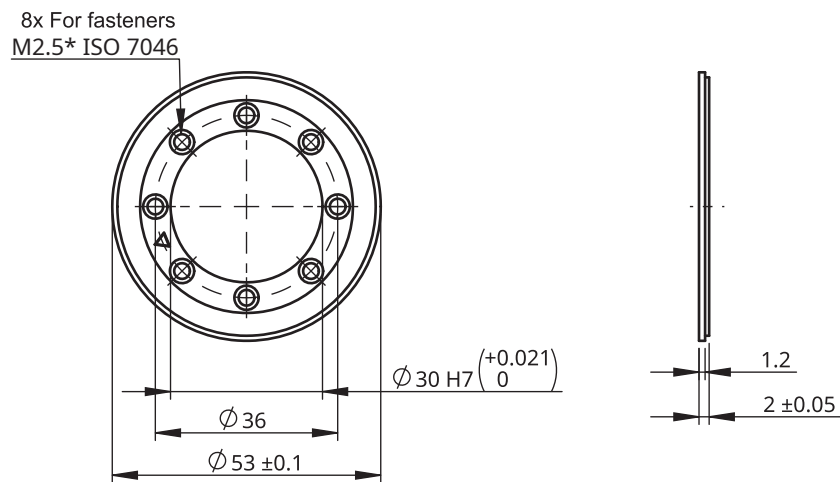


\* Also possible with suitable M2.

### MRA053BG040DSN00 magnetic ring

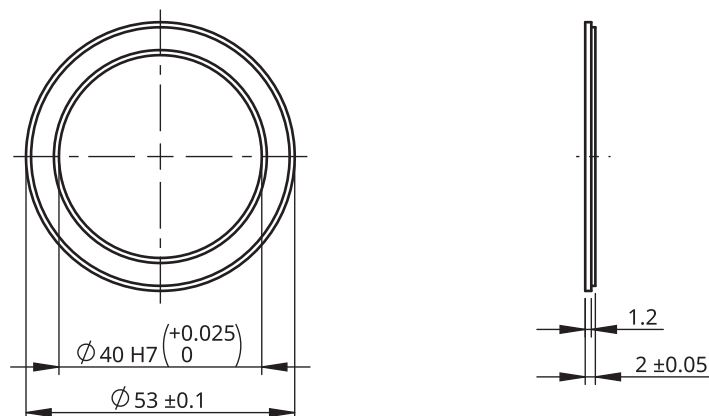


Mounting with glue. See chapter [Installation instructions](#) for more details.

Encoder assembly MB064 readhead shape D with MRA064BC040DSE00 magnetic ring

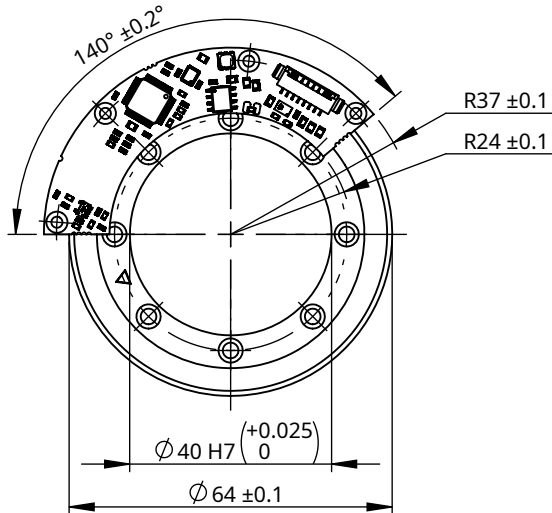


Detail A

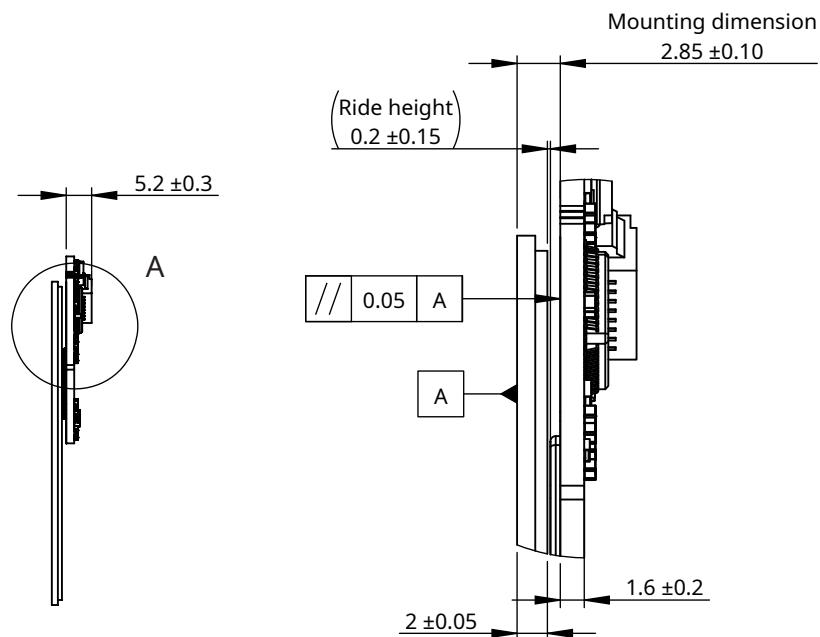


Ride height influences noise on the output. See chapter **Installation instructions** for more details.

Dimensions and installation drawings continued

MB064 readhead shape D

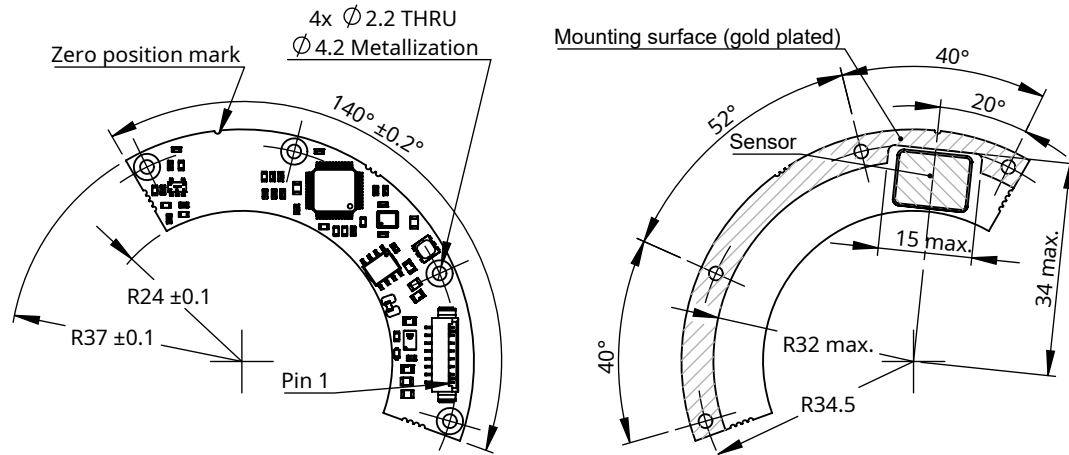



MRA064BC040DSE00 magnetic ring

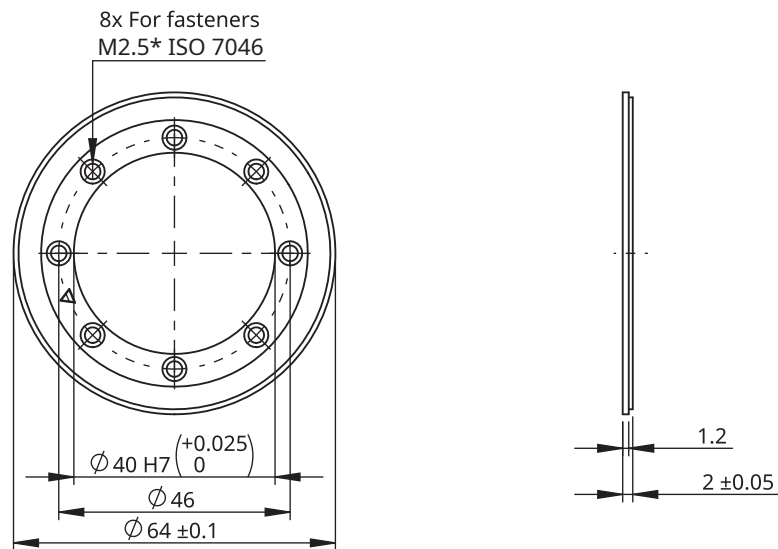

\* Also possible with suitable M2.



Encoder assembly MB080 readhead with MRA080BC055DSE00 magnetic ring

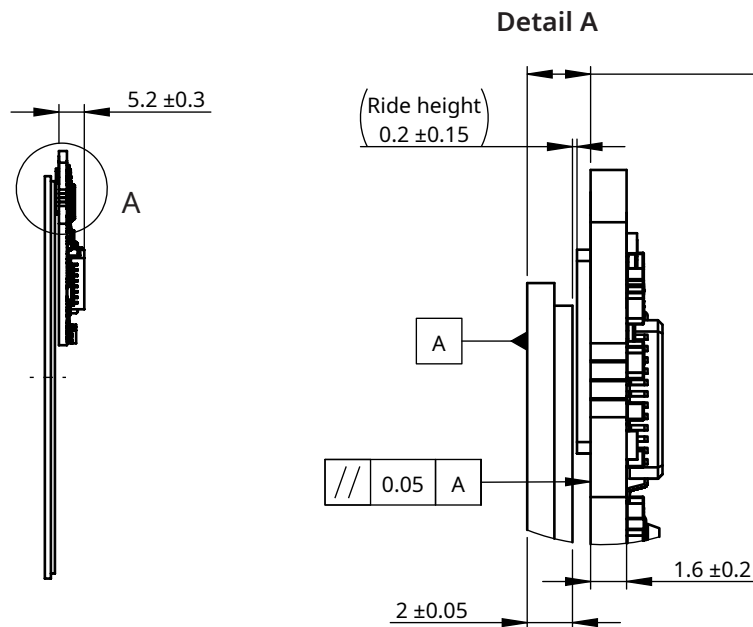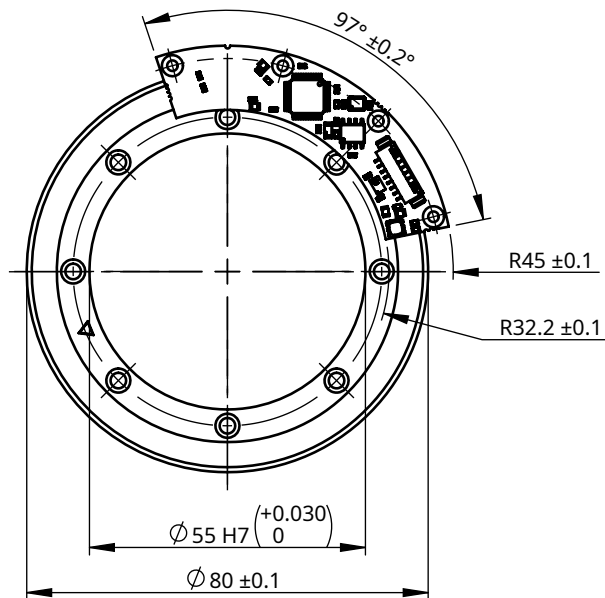


Mounting dimension:

| Ring part number |            |
|------------------|------------|
| MRA080BC055DSE00 | 2.85 ± 0.1 |
| MRA080AF055EMH00 | 4.75 ± 0.1 |
| MRA080BG064DSN00 | 2.85 ± 0.1 |
| MRA080DF068DMH00 | 5.75 ± 0.1 |


Ride height influences noise on the output. See chapter **Installation instructions** for more details.

Dimensions and installation drawings continued

MB080 readhead

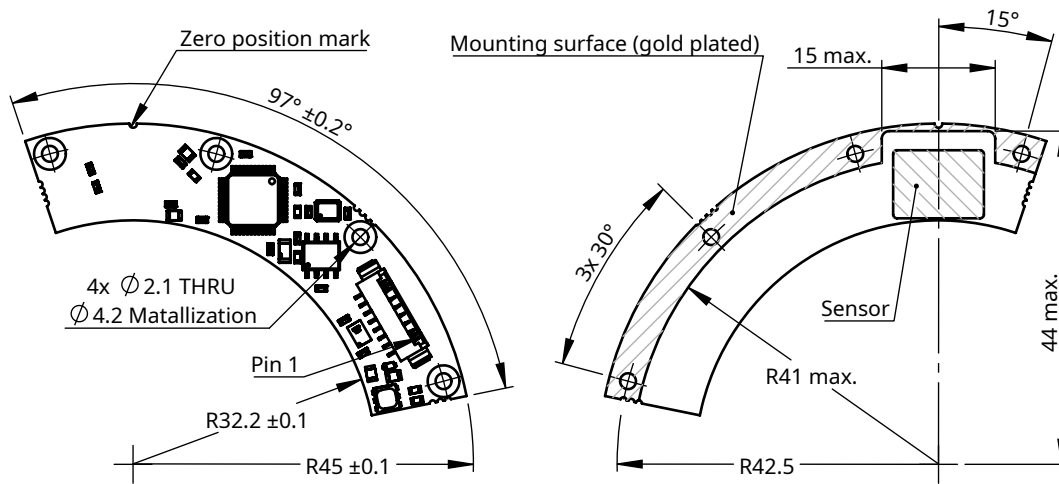


MRA080BC055DSE00 magnetic ring

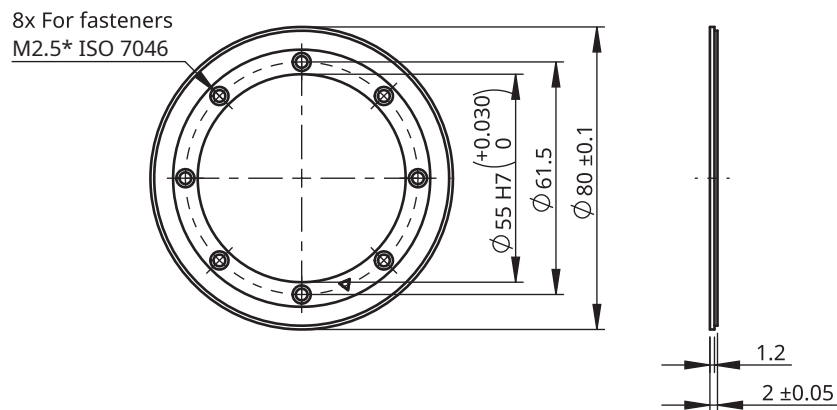


\* Also possible with suitable M2.

MRA080AF055EMH00 magnetic ring

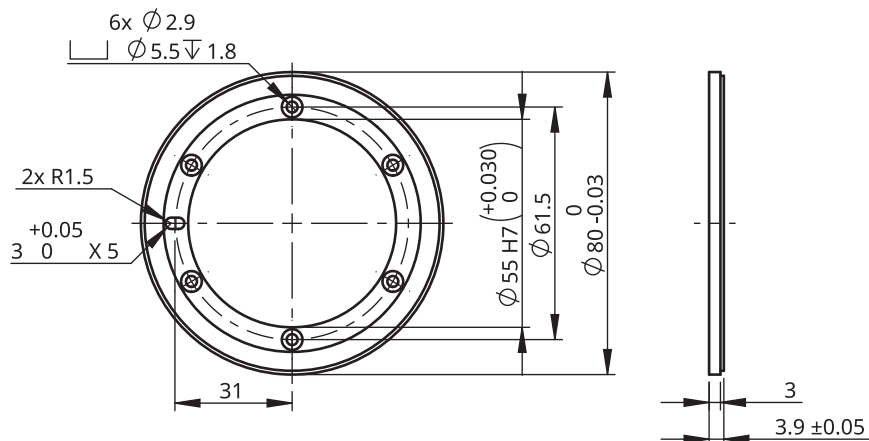


**MRA080BG064DSN00 magnetic ring**

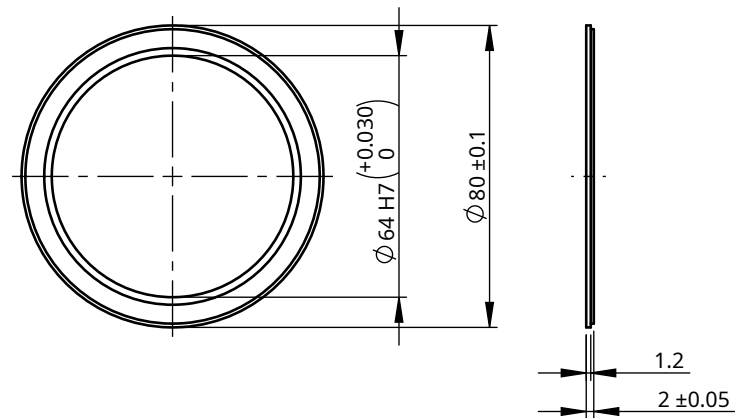

Mounting with glue. See chapter [installation instructions](#) for more details.

**MRA080DF068DMH00 magnetic ring**

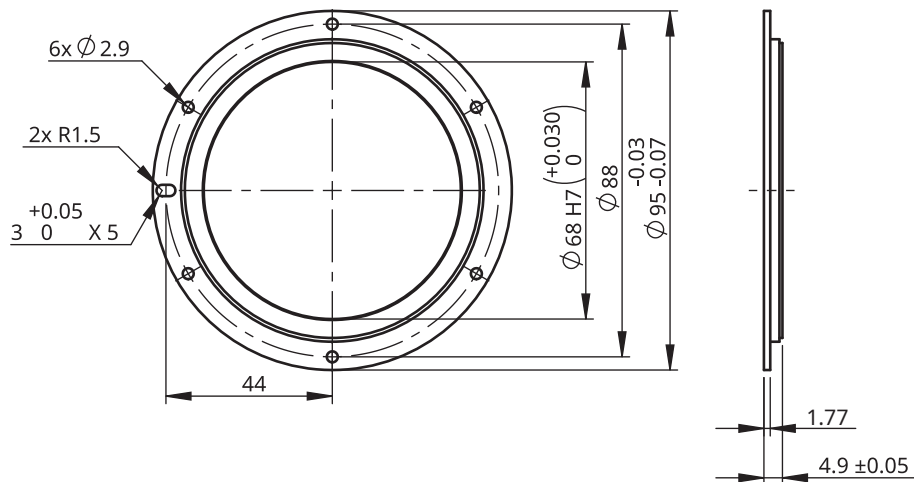





## Installation instructions

### Axial position adjustment (ride height)

The distance between the sensor and the ring should be between 0.05 mm and 0.35 mm. See detail A on dimension drawings of encoder assemblies. Using the gold-plated surface on the bottom as a reference surface for mounting the readhead is recommended. If the top side of the readhead is used as a reference surface, note that the thickness tolerance of the readhead must be taken into account. Also make sure that the signal traces and components are not in contact with mechanical assembly. Optionally, you may also use **shims** for height adjustment of the readheads.

The integrated LED can be used as an indicator. If the ride height is within the installation tolerances, the indicator LED will be green and will not change when the ring rotates. The center of the ring and the center of the readhead arc must be coaxial. The permissible eccentricity tolerances are given in the table below. Precise centering of the ring is essential, as the eccentricity of the ring mounting plays a major role in the overall accuracy.

### Installation tolerances (readhead to ring)

|   |   |   |
|---|---|---|
| <b>Axial displacement / ride height</b><br>"Mounting dimension" on drawings | See detail A on dimension drawings of encoder assemblies.<br>Tight ride height is recommended. Increasing the ride height exponentially increases encoder noise even if it is within installation tolerances.<br>See chapter <b>Resolutions</b> . |    |
| <b>Tangential displacement of the readhead</b>                              | ±0.3 mm   |  |
| <b>Radial displacement of the readhead</b>                                  | MB022: ±0.1 mm<br>MB029: ±0.3 mm<br>MB039: ±0.4 mm<br>MB049, MB053, MB064, MB080: ±0.5 mm   |  |
| <b>Non-parallel mounting</b>  | Tilt angle <0.2°  |  |

 **AksIM-2 installation video**

### Measuring ride height between the ring and the readhead

The signal level information read out via communication interface can be used to calculate the ride height (distance between rubber on the ring and sensor on the readhead).

The value is proportional to the distance between the sensor and the ring. To calculate the real distance use the following formula:

Ride height =  $K \times \text{Ln}(\text{SignalLevel}) + N$

Calculated ride height has tolerance of ±20 µm.

| Encoder size  | K      | N   |
|---------------|--------|-----|
| 022, 029      | -95.49 | 977 |
| 039, 049      | -83.56 | 865 |
| 053, 064, 080 | -71.62 | 748 |

K and N are selected depending on the encoder size.

The SignalLevel value is available in the BiSS register at addresses 0x4E - 0x4F (see document MBD02 available at **RLS Media center**), at the UART interface with command 'a' (see **page 35**) and in EncoLink register 0x004E (see document MBD08 available in **RLS Media center**).

## Installation tolerances (ring to shaft)

| Ring / shaft fit       | Encoder accuracy |               |               |               |               |               |               |
|------------------------|------------------|---------------|---------------|---------------|---------------|---------------|---------------|
|                        | MRA022           | MRA029        | MRA039        | MRA049        | MRA053        | MRA064        | MRA080        |
| H7/g6 worst case       | ±0.105°          | ±0.105°       | ±0.105°       | ±0.077°       | ±0.77°        | ±0.07°        | ±0.063°       |
| H7/g6 average          | ±0.056°          | ±0.056°       | ±0.049°       | ±0.042°       | ±0.042°       | ±0.035°       | ±0.035°       |
| After self-calibration | N/A              | Up to ±0.014° | Up to ±0.012° | Up to ±0.007° | Up to ±0.006° | Up to ±0.004° | Up to ±0.004° |

See table of recommended tightening torques for RLS products available at [RLS media center](#).

## Mounting rings with glue (option “G” in part number)

Rings that can only be mounted with glue: MRA049BG034DSN00, MRA053BG040DSN00 and MRA080BG064DSN00.

It is possible to install any type of AksIM-2 ring with glue. However, RLS does not recommend or supply any type of glue. Contact a local company that sells glue for further help in selecting the correct glue type.

When choosing the correct type of glue, consider the following points:

- Good adhesion to the shaft material.
- Good adhesion to the metal part of the ring (material is specified in the data sheet).
- Required temperature range and material expansion.
- Acceleration of the shaft in the final application.
- Minimum glue thickness (from the data sheet).
- Glue thickness must be very even to avoid variations in air gap between ring and sensor.
- Mechanical shock and vibration testing and temperature cycling must be performed to validate the assembly and avoid failure in the future.

### Typical situations:

- Hard type of glue is prone to braking if shaft and ring materials have very different thermal expansion coefficients and thermal variation is big.
- Soft glue, based on foam or double sided tape could have limited temperature range or could add metrology errors into the system.

Follow the recommended procedure supplied together with the chosen glue. Consult user manual or ask local distributor of the glue for help.

### Typical procedure:


- Clean surfaces with alcohol, remove any particles, dust and grease
- Apply glue to one or both surfaces
- Press parts together evenly
- Make sure the rubber part of the ring is not contaminated with glue
- Cure the glue (heat, force, duration, humidity,...)
- Measure the air gap between ring and readhead

## Electrical connections

| Connector | Soldering pads | BiSS C                     | Asynchronous serial | SPI  | PWM        | SSI    |
|-----------|----------------|----------------------------|---------------------|------|------------|--------|
| 1         | 1              | 5 V supply                 |                     |      |            |        |
| 2         | 2              | 0 V (GND)                  |                     |      |            |        |
| 3         |                | Temperature sensor pin 1 * |                     |      |            |        |
| 4         |                | Temperature sensor pin 2 * |                     |      |            |        |
| 5         | 3              | MA+                        | RX Command in+      | SCK  | Status out | Clock+ |
| 6         | 4              | MA-                        | RX Command in-      | NCS  | -          | Clock- |
| 7         | 5              | SLO+                       | TX Data out+        | MISO | PWM out    | Data+  |
| 8         | 6              | SLO-                       | TX Data out-        | MOSI | -          | Data-  |

\* See chapter [External isolated temperature sensor](#)

### Pinout



#### 8-pin low profile connector

FCI / AMP 10114830-11108LF -horizontal


FCI / AMP 10114828-11108LF -vertical (readhead MB022 only)

Note: On some connectors there is "Pin 1" marking imprinted, which is sometimes in a wrong position and must be ignored.

#### Counterpart mating connector:

FCI / AMP 10114826-00008LF  
and 10114827-002LF


Locking features of the connector: Retention system on the bottom side - bumps on the plug and dimples in the receptacle. High friction in the contacts. Make sure to use original parts that comply with these features.



#### Soldering pads

Dimensions: 2.54 x 1.14 mm  
with 1.875 mm pitch

Soldering of the wires to the encoder must be done in accordance with IPC-A-610 Class 2 or 3 (or similar).  
Improper soldering will void the warranty.



#### Readhead is ESD sensitive - handle with care.

Do not touch electronic circuit, wires or sensor area without proper ESD protection or outside of ESD controlled environment.

## Technical specifications

### System data

|                        |   |
|------------------------|---|
| <b>Reading type</b>    | Axial reading   |
| <b>Resolution</b>      | From 17 bit to 20 bit and 16 bit multiturn counter option (see chapter <b>Resolutions</b> )   |
| <b>Maximum speed</b>   | Size 022: 10,000 rpm  |
|                        | Size 029: 10,000 rpm  |
|                        | Size 039: 10,000 rpm  |
|                        | Size 049: 9,500 rpm (for higher speeds <b>contact RLS</b> )   |
|                        | Size 053: 7,500 rpm   |
|                        | Size 064: 6,000 rpm   |
| <b>System accuracy</b> | Size 080: 4,700 rpm   |
|                        | ±0.004° to ±0.014° / 14 to 50 arcsec after encoder self-calibration (see chapter <b>Installation instructions</b> ).<br>For high-accuracy variants <b>contact RLS</b> . |
| <b>Hysteresis</b>      | Less than unit of resolution  |
| <b>Repeatability</b>   | Less than unit of resolution  |
| <b>Encoder speed</b>   | 9 kHz bandwidth, 18 kHz sampling rate, up to 54 kHz refresh rate (see chapter <b>Communication interfaces</b> ).  |
| <b>Thermal drift</b>   | None (accuracy does not change with temperature)  |

### Electrical data

|  |   |
|--|---|
| <b>Supply voltage (V<sub>DD</sub>)</b> | 4.5 V to 5.5 V at the connector. Rise time should be shorter than 20 ms.                      |
| <b>Set-up time</b>                     | 100 ms (first data ready after supply voltage is in range), worst case: 200 ms                |
| <b>Current consumption</b>             | Typ. 130 mA, max. 150 mA (without load on the outputs)  |
| <b>Connection</b>                      | 8-pin low-profile connector or soldering pads   |
| <b>Connector locking mechanism</b>     | Retention force 20 N (2 kg)   |
| <b>Output load</b>                     | RS422: ±40 mA   |
|  | PWM, SPI: 5 mA (LVTTTL logic level)   |
| <b>ESD protection</b>                  | HBM, Class 2, ±2 kV (valid only on RS422 signals on connector; do not touch other components) |

### Mechanical data

|  |                               |   |
|--|-------------------------------|---|
| <b>Available ring sizes (inner diameter)</b> |                               | 8 mm, 10 mm, 12.7 mm, 20 mm, 25 mm, 30 mm, 34 mm, 40 mm, 55 mm, 64 mm, 68 mm                    |
| <b>Material type</b>                         | 2 mm thick rings              | EN 1.4016 / AISI430 with glued CPE rubber filled with ferrite particles (for material S)        |
|  | 3.9 mm and 4.9 mm thick rings | EN 1.4005 / AISI416 or EN 1.4104 / AISI430F with glued CPE rubber filled with ferrite particles |
| <b>Mass, inertia</b>                         |                               | See <b>Selection table</b>  |








## Environmental data

|  |   |
|--|---|
| <b>Operating and storage temperature</b> | -40 °C to +105 °C (standard)<br>Readhead MB022: -40 °C to +85 °C  |
| <b>Humidity</b>                          | Up to 70 % non-condensing (for higher with conformal coating <a href="#">contact RLS</a> )              |
| <b>External magnetic field</b>           | ±20 mT  |
| <b>Pressure</b>                          | Up to 600 bar with special option - See chapter <a href="#">Operation in high-pressure applications</a> |
| <b>Shock</b>                             | 100 g (6 ms, half-sine, EN 60068-2-27:2009)   |
| <b>Vibration</b>                         | 80 g (55 Hz - 2000 Hz, EN 60068-2-6:2008)   |
| <b>Environmental compliance</b>          | RoHS, REACH   |

## Status indicator LED

The LED provides visual feedback on signal strength, error status, and is used for setup and diagnostics. Flashing LED indicates that power is being supplied to the encoder, but communication has not been established. When communication is running at a rate of at least 5 readings per second, LED will be constantly lit. On encoder startup the LED briefly flashes red or orange. This is intended function for testing the LED.

**LED is not present on the readhead size MB022.**

| LED signal   | Status  |
|--|---|
|  Green                          | Normal operation; position data is valid.   |
|  Orange                         | Warning; position is valid, but the resolution and/or accuracy might be out of specification. Some operating conditions are outside limits. |
|  Red                            | Error; position data is not valid.  |
|  Slow flashing                  | Communication has not been established.<br>Position was not requested within last 200 ms. Color of flashing - see above.                    |
|  No light                       | No power supply.  |
|  Continuously fast flashing red | System error during start-up or operation.  |
|  3 s<br>3 s<br>3 s              | Self-calibration result - see chapter <a href="#">Self calibration after installation</a> .   |

## Chemical resistance

RLS products are commonly used in industrial applications and are exposed to chemicals that can affect their internal and external components. Although our products are designed to withstand many harsh chemicals and environments, long-term resistance depends on exposure, temperature and concentration. Most of the chemicals to which our products are exposed are not in constant contact. Therefore, a material that is not resistant when immersed in a chemical may be durable indefinitely if wiped with the same chemical once a day.

CPE rubber on the ring will not withstand exposure to most mineral oils and greases.

For more information, or to confirm compatibility with oils and other chemicals in the environment, please [contact RLS](#).




## Accuracy of the encoder system

Precise centering of the ring is the key to good overall accuracy.


By minimising the eccentricity of the ring assembly (using a gauge) and using a drive shaft with precision bearings, the error can typically be reduced to  $\pm 0.05^\circ$  for MRA080 rings and  $\pm 0.06^\circ$  for MRA049 rings.

A typical accuracy diagram after good installation of MRA080 (without eccentricity) is shown in the diagram below.

To improve accuracy after installation, we recommend to perform the **self-calibration** function.

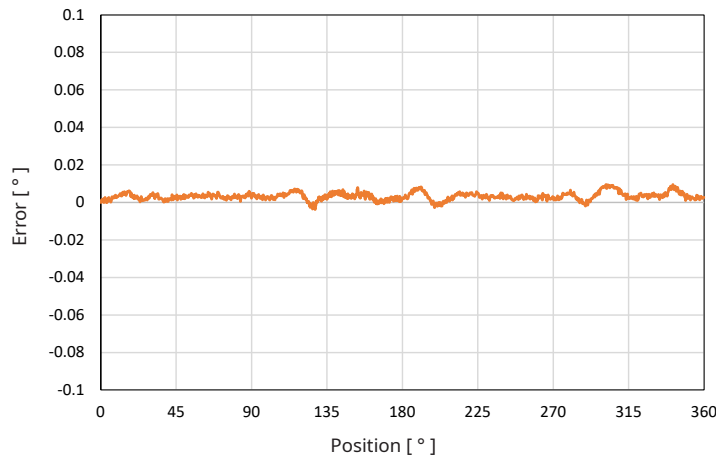

### Higher harmonic components of the encoder error plot

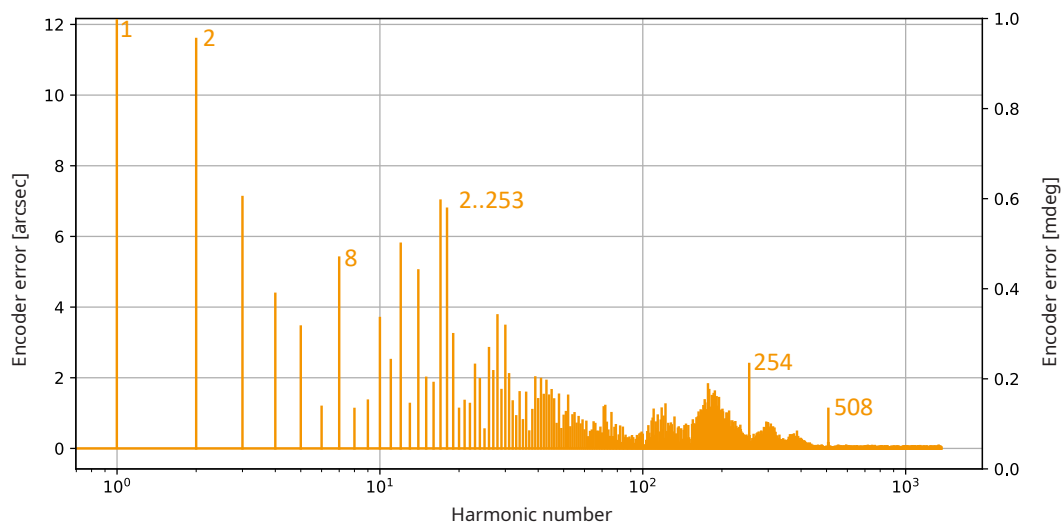

Typical encoder error has some definite higher harmonic components. Example is from the MRA080 + MB080 encoder. Other encoder sizes have slightly different spectrum.

| Harmonic number |                                   |
|-----------------|-----------------------------------|
| 1               | Eccentricity of the ring mounting |
| 2               | Oval shape of the ring            |
| 8               | Number of mounting holes          |
| 2...253         | Absolute code influence           |
| 254             | SDE (offset)                      |
| 508             | SDE (amplitude, phase)            |

For typical accuracy values see chapter **Installation tolerances (ring to shaft)**.


## Self-calibration after installation

The self-calibration function eliminates the error caused by eccentricity, which is a dominant contributor to the accuracy of the encoder and is caused by the eccentric mounting of the ring. It cannot compensate for the magnetisation error between different rings. The Subdivisional Error (SDE) is negligible with AksIM. This function removes the error from one sine wave per revolution. The self-calibration function can be initiated by the user via selected communication interfaces or by using the appropriate USB encoder interface. Not available with PWM and SSI outputs. Refer to the description of the selected communication interface for details. When the multiturn counter is used in the encoder, it may have an incorrect value after self-calibration if the speed is greater than  $\pm 300$  RPM. In such a case, the multiturn error flag is set.

Requirements:

- Free mechanical rotation between  $180^\circ$  and  $360^\circ$  (the desired angle can be selected via the communication interface). The performance of the self-calibration procedure is optimal at  $360^\circ$  rotation and is reduced if the arc length is reduced.
- Good signal over the entire calibration angle (no warnings or errors).
- Default time available is 10 seconds. Desired time (up to 40 seconds) can be set via the communication interface.
- Variation of direction and speed are not important. Minimum speed is 6 RPM.
- Suitable communication interface or adapter that enables the function to be triggered.

The graph below shows how much the accuracy of the encoder can be improved with the self-calibration function. The remaining minimum accuracy is influenced by magnetisation variations and noise of the readhead.

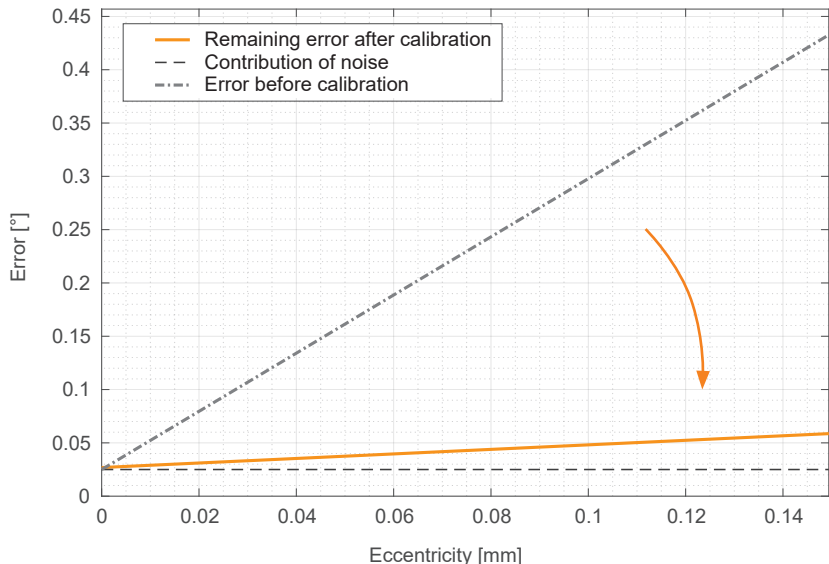

For typical accuracy values see chapter **Installation tolerances (ring to shaft)**.

When the self-calibration process is complete, fast-flashing LED indicates whether the process was successful.

| LED                        | Self-calibration status  |
|----------------------------|--|
| ●●●●● Green flashing fast  | Self-calibration successfully performed.   |
| ●●●●● Orange flashing fast | Ring positioning is already perfect - correction was not performed. Status bit 0x20 is set.  |
| ●●●●● Red flashing fast    | Input parameter out of range. Status bit 0x10 is set.<br>Eccentricity or radial offset is very high. Status bit 0x08 is set.<br>Timeout. Ring is rotating too slowly (<6 RPM). Status bit 0x04 is set. |



**Explainer video: AksIM-2 self-calibration feature.**

Encoder system size 022 currently does not support self-calibration.

## External magnetic field


The operating principle of any magnetic encoder is to detect changes in the magnetic field of the magnetised ring. External magnetic fields generated by permanent magnets, electric motors, coils, magnetic brakes, etc. can affect the operation of the encoder. If external magnetic field is greater than 20 mT, it will temporarily cause the encoder to malfunction. Fields stronger than 50 mT may cause permanent damage to the ring.

Unwanted magnetic fields must be blocked at the source. If this is not possible, the encoder can be shielded with a ferromagnetic metal sheet. The ring can also be used for partial shielding. It is recommended that the bottom of the ring is mounted with the readhead facing away from the source of the escaping magnetic field. [Contact RLS](#) for more information.

## External isolated temperature sensor

Encoders provide two pass-through signals for connecting an external temperature sensor in an application. These can be Pt100, Pt1000, NTC, 1-wire or a similar low-voltage analogue or digital sensor. The signals are isolated from the encoder circuitry and are only routed from the “Temp. Sens.” pins of the connector to the solder pads where the external sensor is to be connected in an application.

The purpose of this is to provide temperature monitoring in applications such as electric motors, gearboxes, etc. where precise monitoring is required in the vicinity of the encoder. This solution simplifies cable management as the existing encoder cable can be used to transmit these two signals. The voltage must be limited to  $\pm 30$  V relative to the other encoder signals and the current to  $\pm 500$  mA.

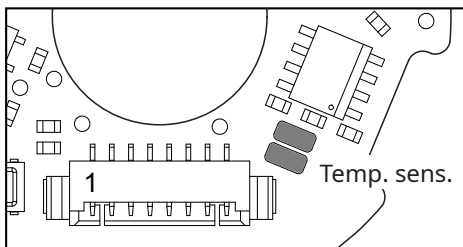

## Operation in high-pressure applications

The encoder can be configured to operate at ambient pressures of up to 600 bar. Typical applications include ROV submarines where the entire system is submerged in oil. A special version of the encoder must be used with the “P” option (see [Part numbering](#)). All frequencies must be reduced and timings increased by 12 %.

List of available part numbers:

- MB029DCC18MFNP00
- MB049DCC19BDNP00
- MB049DCC19MDNP00
- MB080DCC17BDNP00
- MB080DCC20MDNP00

For more information or to confirm compatibility with oils and other chemicals in the environment, please [contact RLS](#).

## Communication interfaces

### BiSS

|                                |   |
|--------------------------------|---|
| <b>Clock frequency</b>         | From 400 kHz to 5 MHz                         |
| <b>Maximum request rate</b>    | 44 kHz (38 kHz with multiturn counter option) |
| <b>Mechanical sample rate</b>  | 18 kHz  |
| <b>Bandwidth</b>               | 9 kHz   |
| <b>Resolution</b>              | See chapter <b>Resolutions</b> .              |
| <b>Latency</b>                 | <10 µs  |
| <b>Timeout (monoflop time)</b> | 13.5 µs                                       |

### Asynchronous serial RS422 (UART)

|                               |  |
|-------------------------------|--|
| <b>Baud rate</b>              | 115.2 kbps, 128 kbps, 230.4 kbps, 256 kbps, 500 kbps, 921.6 kbps, 1 Mbps (Configurable from 300 baud to 1 Mbaud) |
| <b>Data format</b>            | 8 bits, no parity, 1 stop bit  |
| <b>Request rate</b>           | On demand or continuous  |
| <b>Mechanical sample rate</b> | 18 kHz   |
| <b>Bandwidth</b>              | 9 kHz  |
| <b>Resolution</b>             | See chapter <b>Resolutions</b> .   |
| <b>Latency</b>                | <10 µs   |

### SPI

|                               |   |
|-------------------------------|---|
| <b>Clock frequency</b>        | Max 4 MHz                                     |
| <b>Maximum request rate</b>   | 54 kHz (48 kHz with multiturn counter option) |
| <b>Mechanical sample rate</b> | 18 kHz  |
| <b>Bandwidth</b>              | 9 kHz   |
| <b>Resolution</b>             | See chapter <b>Resolutions</b> .              |
| <b>Latency</b>                | <10 µs  |

### PWM\*

|                       |  |
|-----------------------|--|
| <b>Base frequency</b> | 122.07 Hz, 274.66 Hz, 366.21 Hz, 549.32 Hz, 1098.63 Hz |
| <b>Update rate</b>    | Same as Base frequency                                 |
| <b>Resolution</b>     | 16 bits  |
| <b>Latency</b>        | From 55 µs to 110 µs                                   |

### SSI\* (Not recommended for new design)

|                                |  |
|--------------------------------|--|
| <b>Clock frequency</b>         | Minimum 80 kHz<br>Maximum 500 kHz with standard SSI (2.5 MHz with <i>Delay First Clock</i> function on the controller) |
| <b>Mechanical sample rate</b>  | 18 kHz   |
| <b>Resolution</b>              | See chapter <b>Resolutions</b> .   |
| <b>Latency</b>                 | From 55 µs to 110 µs   |
| <b>Timeout (monoflop time)</b> | 20 µs  |

Interfaces with big or variable latency are not suitable for high-speed closed control loops.  
\* SSI interface is supported for legacy applications and is not recommended for new design.

## Resolutions

| Resolution | MRA022                 | MRA029                   | MRA039, MRA049           | MRA053, MRA064, MRA080   |
|------------|------------------------|--------------------------|--------------------------|--------------------------|
| Binary     | 17 bits per revolution | 17 bits per revolution   | 17 bits per revolution   | 17 bits per revolution   |
|            |                        | 18 bits per revolution * | 18 bits per revolution * | 18 bits per revolution   |
|            |                        |                          | 19 bits per revolution * | 19 bits per revolution * |
|            |                        |                          |                          | 20 bits per revolution * |

\* High resolution options may contain noise on the output. These resolutions are suitable for smoother operation of the control loops or averaging to obtain a fine position. The noise margin increases exponentially with increasing ride height between the ring and readhead.

## Multiturn counter

The multiturn counter is available on the following communication interfaces: BiSS, Asynchronous serial (UART), SPI or SSI. The multiturn option is selected with the resolution in the [Part numbering](#). The multiturn counter is 16 bits (0 to 65535 counts). Counting is only available when the encoder is powered, but the counter state is stored in a non-volatile memory at power-down and is restored at power-up. Maximum permissible rotation during power-down is  $\pm 90^\circ$ . If the rotation is greater than this, the encoder reports an error to indicate an invalid multiturn counter value. To reset this condition, it is necessary to apply a new multiturn counter value via the communication interface or cycle power to the encoder. If encoder is rotated for  $\pm 360^\circ$  or for multiple rotations, this movement is not registered and no multiturn error is set. If any other error is set during a rotation of  $90^\circ$  or more, the multiturn counter value may become inconsistent with the mechanical position.

The user must implement the multiturn counter validation method by either:

- Activating the mechanical brake before the encoder goes into the power-down state and releasing the brake after the encoder is powered-up
- Presetting a new multiturn counter value each time the encoder is powered-up.
- Other user-implemented multiturn counter validation methods.

### Multiturn - shaft turn counter limitations

Counter may have invalid value in following circumstances:

| Possible reasons for failure  | Solution  |
|---|---|
| If encoder is rotated for $\pm 360^\circ$ or multiple rotations during off state.   | Use mechanical brake.   |
| If Error flag (red LED) is present for $90^\circ$ rotation or more.   | Read and evaluate Error bit.  |
| When the encoder moves for $90^\circ$ or more, or rotates 300 RPM or more when the encoder performs blocking operations (storing information in non-volatile memory, factory reset, write protect, self-calibration). | Stop rotation before performing these operations.                         |
| If user changes single-turn position offset for $90^\circ$ or more.   | Set new multiturn counter value right after setting zero position offset. |
| If any function for storing information to non-volatile memory (save configuration, factory reset, write protect, self-calibration) is active when power-down happens.  | Keep power supply stable when performing those operations.                |

### Multiturn error flag

Error flag is set in one of the following conditions:

- Detected movement of  $>90^\circ$  and  $<270^\circ$  when powered off,
- Detected speed of more than 300 RPM during blocking operation,
- High, unexpected positional difference detected (acceleration error)

Multiturn error bit can be cleared by writing new value into the encoder or by power cycle. On SSI interface only power cycle is available.

# Latency

---

## Latency on BiSS and Asynchronous serial (UART) and SPI interface

---

BiSS and UART use an algorithm that recalculates the new position for each request. In this way, the request frequency can be higher than the internal cycle frequency of the encoder. Normally, the request rate can be up to 44 kHz. The position is latched at the first falling edge on the MA (clock) line or the first bit of the command byte or on falling edge of NCS signal and the new position value is calculated immediately, therefore the latency is shorter than 10  $\mu$ s.

## Latency on other type interfaces (SSI, PWM)

---

All interfaces transmit the last available valid data from the last internal cycle of the encoder. No additional recalculation takes place.

The internal cycle of the encoder is 55  $\mu$ s. This is the delay between the time the mechanical position is latched by the sensor and the time the data is ready for transmission via the interface.

If the request comes immediately after the data is ready, the latency is 55  $\mu$ s.

If the request comes shortly before the new data is calculated, the latency is 110  $\mu$ s.

### Example:

At  $t = 0 \mu$ s, the physical position is latched, but the position data is not yet calculated. It is then available at 55  $\mu$ s.

When the request comes at  $t = 1 \mu$ s – 54  $\mu$ s, the last available data is sent - that from the previous cycle when the position was latched at  $t = -55 \mu$ s.


## BiSS C interface

Encoder position in up to 20 bit natural binary code and encoder status are available via the BiSS C protocol. The position data is left aligned. The position data is followed by two status bits (active low) followed by CRC (inverted).

BiSS is implemented for point-to-point operation, multiple slaves are not supported.

Communication is bidirectional, the readhead is user programmable and user defined parameters can be stored in the readhead and additional data can be read from the readhead.

### Electrical connection

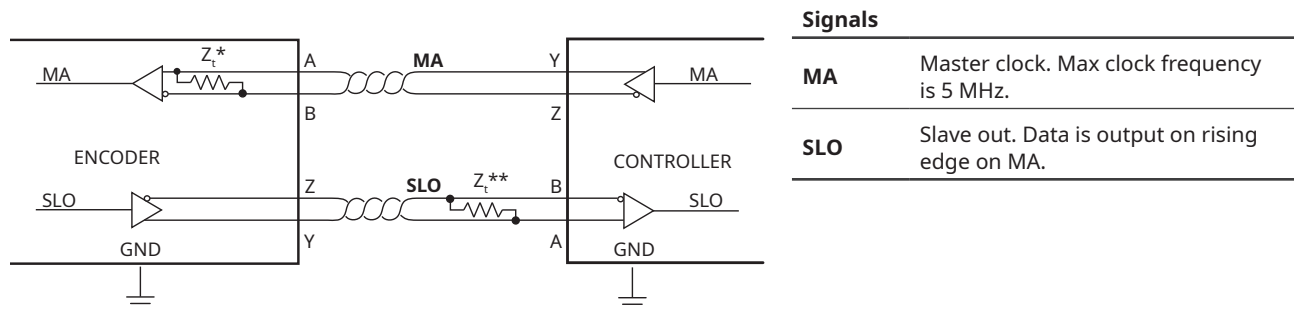


\* The MA and SLO lines are 5 V RS422 compatible differential pairs. The termination resistor on the MA line is integrated inside the encoder.

\*\* Termination at the controller is required, if total cable length is longer than 5 m. The nominal impedance of the cable should be 120  $\Omega$ .

### Output protection

An excessive output current and power dissipation caused by errors or bus conflicts are prevented by two mechanisms. A foldback current limit on the output stage provides immediate protection against short circuits. In addition, a thermal shutdown circuit forces the driver outputs into a high-impedance state, if the chip temperature becomes too high.

### BiSS C timing diagram

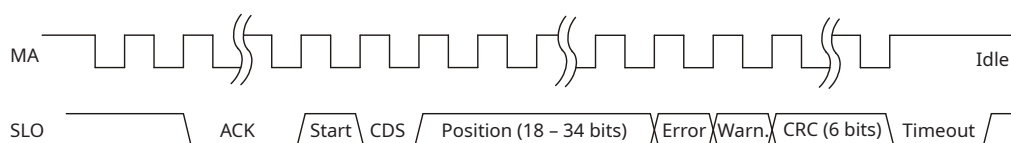

MA is idle high. Communication is initiated with first falling edge.


The encoder responds by setting SLO low on the second rising edge on MA. ACK length is 13 bits.

When the encoder is ready for the next request cycle, it indicates this to the master by setting SLO high.

The absolute position and the CRC data is available in binary format and is first sent in MSB format.

## Cable length compensation

The readhead requires 170 ns to respond to incoming clocks ( $t_{RESP}$ ). The change on the Data signal is delayed by 170 ns after the rising edge on Clock line. An additional delay is caused by the time it takes for the signal needs to propagate through cable to the readhead and back ( $t_{PROP}$ ). This delay is typically 14 ns per 1 meter of cable. The total cable length from the encoder to the receiver must be considered.

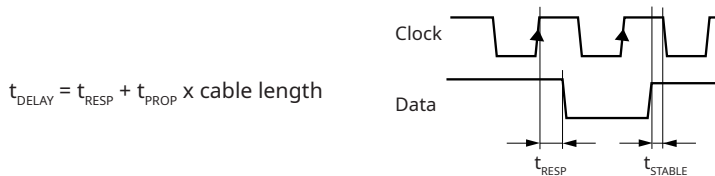

The data signal must be stable before the value is latched. Therefore, if the cable is longer than 1 meter and a clock frequency higher than 2.5 MHz, this delay must be compensated in the receiver (controller) to which the encoder is connected.

## Status bits

| Type    | Value 0                   | Value 1 | Description  |
|---------|---------------------------|---------|--|
| Error   | Position data is invalid. | OK      | Error bit is active low. If low, the position is not valid.  |
| Warning | Position data is valid.   | OK      | Warning bit is active low. If low, the encoder operation is close to its limits. The position is still valid but the resolution and/or accuracy might be out of specification. |

## Communication parameters

*Communication interface variant* in the part number defines the functionality of the encoder.

| Communication interface variant | Parameter       | Value      |
|---------------------------------|-----------------|------------|
| C                               | MA frequency    | Max. 5 MHz |
|                                 | ACK length      | 13 bit     |
|                                 | Register access | Yes        |

| Parameter              | Value  |
|------------------------|--|
| Latency                | <10 $\mu$ s (recalculated on every transmission) |
| Bandwidth *            | 9 kHz  |
| Mechanical sample rate | 18 kHz   |
| Maximum request rate   | 44 kHz (38 kHz Multiturn counter option)         |
| Timeout                | 13.5 $\mu$ s                                     |

\* Bandwidth parameter is the mechanical bandwidth. AksIM samples at 18 kHz, so mechanical changes that are appearing faster than 9 kHz cannot be detected on the output (Nyquist theorem). If the position request comes faster than the sampling frequency, the AksIM encoder recalculates the position at the time of the request based on the current ring velocity.



## Data packet description

Data packet length depends on the resolution and can be from 25 to 44 bits long. It consists of 16 bits for the multiturn counter (if selected) and 17 to 20 bits of Position selected by (resolution), followed by 2 Status bits and 6 CRC bits (see table below).

| Resolution | Multiturn counter | Position | Error Status | Warning Status | CRC (inverted) |
|------------|-------------------|----------|--------------|----------------|----------------|
| 17B        | 0 bits            | 17 bits  | 1 bit        | 1 bit          | 6 bits         |
| 18B        |                   | 18 bits  |              |                |                |
| 19B        |                   | 19 bits  |              |                |                |
| 20B        |                   | 20 bits  |              |                |                |
| 17M        | 16 bits           | 17 bits  | 1 bit        | 1 bit          | 6 bits         |
| 18M        |                   | 18 bits  |              |                |                |
| 19M        |                   | 19 bits  |              |                |                |
| 20M        |                   | 20 bits  |              |                |                |

Example: 18 bits of position + 2 status bits + 6 bits CRC = 26 bits long data packet.

Polynomial for CRC calculation of position, error and warning data is:  $x^6 + x^1 + 1$ . Represented also as 0x43. It is inverted and transmitted MSB first.

Example of calculation routine for 6-bit CRC can be found in the application note CRCD01 available for download at [RLS Media center](#).

How to decode BiSS data packet: see document E201D02 available for download at [RLS Media center](#).

BiSS data packet decoding and CRC validation can be tested with the application available at [RLS media center](#).

For more information regarding BiSS C protocol see [biss-interface.com](http://biss-interface.com).

## Encoder programming


Encoder supports register access which allows setting zero position, running self-calibration function, configuring the encoder, reading signal level indicator, temperature, detailed status bits and electronic datasheet. It also allows storing up to 4 kB of user data into the encoder (eg. motor parameters, assembly data or similar).

This additional information can be found in the "Application note: AksIM-2 BiSS C register access", document number MBD02 available for download at [RLS media center](#).

# Asynchronous serial communication interface over RS422 (UART)

Encoder identification, position data and temperature are available with request-response type of communication over the asynchronous serial link. There are two unidirectional communication channels that form a full-duplex bidirectional data link. Each channel consists of a two wire differential twisted-pair connection conforming to the RS422 signalling standard. Data is transmitted LSB first; big-endian order.

## Electrical connection

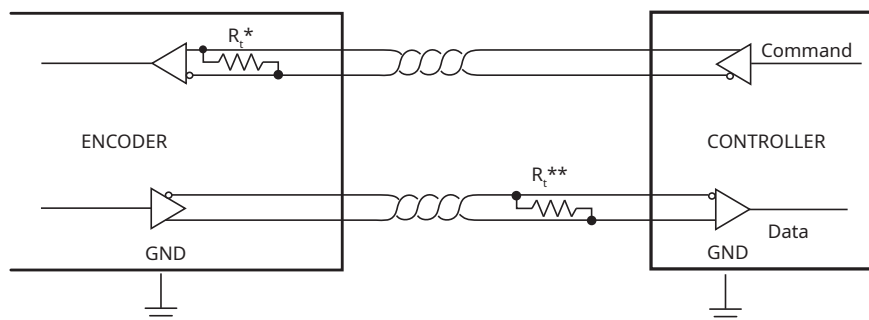

\* The Command and Data signals are 5 V RS422 compatible differential pairs with RC termination inside the readhead.

\*\* Termination at the controller is required if total cable length is longer than 5 m. The nominal impedance of the cable is 120  $\Omega$ .

## Output protection

An excessive output current and power dissipation caused by faults or by bus contention are prevented by two mechanisms. A foldback current limit on the output stage provides immediate protection against short circuits. In addition, a thermal shutdown circuit forces the driver outputs into a high-impedance state if the chip temperature becomes too high.

## Communication parameters

|                               |  |
|-------------------------------|--|
| <b>Character length</b>       | 8 bits   |
| <b>Parity</b>                 | None   |
| <b>Stop bits</b>              | 1  |
| <b>Flow control</b>           | None   |
| <b>Request rate</b>           | Maximum achievable, depending on selected baud rate. Can be transmitted continuously without delays between packets. |
| <b>Mechanical sample rate</b> | 18 kHz   |
| <b>Bandwidth *</b>            | 9 kHz  |
| <b>Position latency</b>       | <10 $\mu$ s (recalculated on every transmission)   |

\* Bandwidth parameter is mechanical bandwidth. AksIM samples at 18 kHz therefore any mechanical changes that are appearing faster than 9 kHz are not detectable on the output (Nyquist theorem). If request for position comes faster than sampling frequency, AksIM encoder recalculates the position at the time of request based on current ring velocity. 9 kHz bandwidth is valid for high dynamic movements of 2 degrees or smaller.

## Asynchronous serial communication interface over RS422 (UART) continued

Link speed is selectable by the *Communication interface variant* in the part number:

| Communication interface variant | A     | B   | C     | D   | E   | F     | G     |
|---------------------------------|-------|-----|-------|-----|-----|-------|-------|
| Link speed (baud rate) in kbps  | 115.2 | 128 | 230.4 | 256 | 500 | 1,000 | 921.6 |

Link speed setting can be changed in the field by following the procedure described in application note. See section **Encoder programming**. New settings are permanent until encoder is reprogrammed again with different settings.

Encoder supports a range of commands to read position data and additional information. In case multiturn option is selected, number in brackets must be used.

| Command (ASCII) | Response  |
|-----------------|---|
| '1'             | '1' + 3 (5) bytes (Position + E/W bits)                                     |
| '3'             | 3 (5) bytes (Position + E/W bits)   |
| 'd'             | 'd' + 3 (5) bytes (Position + E/W bits) + 2 bytes (Detailed status)         |
| 's'             | 's' + 3 (5) bytes (Position + E/W bits) + 3 bytes (Speed in RPM)            |
| 't'             | 't' + 3 (5) bytes (Position + E/W bits) + 1 byte (Sensor temperature in °C) |
| 'a'             | 'a' + 3 (5) bytes (Position + E/W bits) + 2 bytes (Signal level)            |
| 'i'             | 'i' + 7 bytes (Self calibration status)                                     |
| 'v'             | 'v' + 58 bytes (Version info and serial number)                             |

Command '3' is used as a request for the shortest possible response. In this case, only 3 bytes (or 5 bytes in multiturn variant) of position with integrated general error and warning bits are replied.

In case of any other command, the header byte, which should be equal to the command itself, is replied first. Then, regardless of the command, 3 bytes (or 5 bytes if multiturn) of position with Error and Warning bits are sent. After that additional bytes are transmitted that carry requested information.

Returned header byte should be equal to the command and can be used to determine which data packet format has to be decoded. In case of incorrect command, only header byte is returned with no other data.

### Position data packet structure

Position data consists of 3 bytes if singleturn variant is selected or 5 bytes if multiturn variant is selected. Encoder position is always left aligned and starts with multiturn data (if available). Error and warning bits are always right aligned (bit 1 and bit 0 respectively). Between LSB of position and error bit are padding bits with value 0. The structure of position data bytes for each encoder resolution is presented in the table below.

| Position data structure for singleturn variant |               |                   |                          |
|--|---------------|-------------------|--------------------------|
| Encoder resolution                             | Position bits | Zero padding bits | Error bit, Warning bit   |
| 17B  | b23 – b7      | b6 – b2           | b1, b0 (both active low) |
| 18B  | b23 – b6      | b5 – b2           | b1, b0 (both active low) |
| 19B  | b23 – b5      | b4 – b2           | b1, b0 (both active low) |
| 20B  | b23 – b4      | b3 – b2           | b1, b0 (both active low) |

## Asynchronous serial communication interface over RS422 (UART) continued

| Position data structure for multiturn variant |               |                   |                          |
|---|---------------|-------------------|--------------------------|
| Encoder resolution                            | Position bits | Zero padding bits | Error bit, Warning bit   |
| 17M   | b39 – b7      | b6 – b2           | b1, b0 (both active low) |
| 18M   | b39 – b6      | b5 – b2           | b1, b0 (both active low) |
| 19M   | b39 – b5      | b4 – b2           | b1, b0 (both active low) |
| 20M   | b39 – b4      | b3 – b2           | b1, b0 (both active low) |

Error and warning bits integrated into position data are always transmitted inverted (active low). Value '0' on error bit means that the position is not valid. Value '0' on warning bit means position is valid, but the encoder is near operational limits. In case of error, the last valid data is transmitted.

### Commands and their respective responses for singleturn version

For multiturn add 2 bytes to the length of position data.

| Command '1'      |   |
|------------------|---|
| Byte transmitted | Contents  |
| B1               | ASCII header '1'  |
| B2 - B4          | Position + E + W  |
| Command '3'      |   |
| Byte transmitted | Contents  |
| B1 - B3          | Position + E + W  |
| Command 'd'      |   |
| Byte transmitted | Contents  |
| B1               | ASCII header 'd'  |
| B2 - B4          | Position + E + W  |
| B5 - B6          | Detailed status (refer to table on next page)   |
| Command 't'      |   |
| Byte transmitted | Contents  |
| B1               | ASCII header 'd'  |
| B2 - B4          | Position + E + W  |
| B5 - B6          | Persistent detailed status (refer to table on next page)  |
| Command 's'      |   |
| Byte transmitted | Contents  |
| B1               | ASCII header 's'  |
| B2 - B4          | Position + E + W  |
| B5 - B7          | (Signed binary) Rotational speed in RPM.  |
| Command 't'      |   |
| Byte transmitted | Contents  |
| B1               | ASCII header 't'  |
| B2 - B4          | Position + E + W  |
| B5               | (Signed binary) Sensor temperature in °C. This value is typically 5 °C to 15 °C higher than ambient. Tolerance of readout is ±5 °C. |

## Asynchronous serial communication interface over RS422 (UART) continued

| Command 'a'      |  |
|------------------|--|
| Byte transmitted | Contents   |
| B1               | ASCII header 'a'   |
| B2 - B4          | Position + E + W   |
| B5 - B6          | (Unsigned binary) Signal level<br>Value is proportional to the distance between the sensor and ring. To calculate real distance see <a href="#">formula on page 20</a> . |
| Command 'i'      |  |
| Byte transmitted | Contents   |
| B1               | ASCII header 'i'   |
| B2               | Self calibration status - See document MBD03 available for download at <a href="#">RLS media center</a>  |
| B3 - B4          | (Unsigned binary) Ring eccentricity (μm)   |
| B5 - B6          | (Unsigned binary) Ring eccentricity phase (deg)  |
| B7 - B8          | (Unsigned binary) Readhead radial displacement (μm)  |
| Command 'v'      |  |
| Byte transmitted | Contents   |
| B1               | ASCII header 'v'   |
| B2 - B8          | ASCII identification string 'AksIM-2'  |
| B9               | Space character  |
| B10 - B17        | ASCII serial number (8 characters)   |
| B18              | Space character  |
| B19 - B34        | ASCII part number (16 characters)  |
| B35              | Space character  |
| B36              | Binary firmware major version  |
| B37              | Binary firmware minor version  |
| B38              | Binary communication interface version   |
| B39 - B42        | Binary firmware revision number  |
| B43              | Space character  |
| B44 - B59        | ASCII extended serial number (16 characters)   |

## Asynchronous serial communication interface over RS422 (UART) continued

### Structure of Detailed status bits (two bytes)

| Detailed status (part 1) |   |
|--------------------------|---|
| <b>b15</b>               | Error - Multiturn counter mismatch. Encoder was rotated for more than $\pm 90^\circ$ during power-down. Cycle the power to clear this error or apply new multiturn counter value. |
| <b>b14</b>               | Error - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.  |
| <b>b13</b>               | Warning - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.  |
| <b>b12</b>               | Error - Magnetic sensor error. Cycle power to the encoder.  |
| <b>b11</b>               | Error - Sensor reading error, probably caused by electrical interference, ground loop or RFI.   |
| <b>b10</b>               | Error - Encoder not configured properly.  |
| General status           |   |
| <b>b9</b>                | Error. If bit is set, position is not valid.  |
| <b>b8</b>                | Warning. If bit is set, encoder is near operational limits. Position is valid. Resolution and / or accuracy might be lower than specified.  |

Error and Warning bits can be set at the same time; in this case Error bit has priority.

The colour of the LED on the readhead housing indicates the value of the General status bits:

● Red = Error, ● Orange = Warning, ● Green = Normal operation, ○ No light = no power supply.

The warning or error status is more closely defined by the Detailed status bits.

| Detailed status (part 2) |  |
|--------------------------|--|
| <b>b7</b>                | Warning - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.   |
| <b>b6</b>                | Warning - Signal amplitude low. The distance between the readhead and the ring is too large.   |
| <b>b5</b>                | Error - Signal lost. The readhead is out of alignment with the ring or the ring is damaged.  |
| <b>b4</b>                | Warning - Temperature out of range. The readhead temperature is out of specified range.  |
| <b>b3</b>                | Error - Power supply error. The readhead power supply voltage is out of specified range.   |
| <b>b2</b>                | Error - System error. Malfunction inside the circuitry or inconsistent calibration data is detected. To reset the System error bit try to cycle the power supply while the rise time is shorter than 20 ms.                                      |
| <b>b1</b>                | Error - Magnetic pattern error. A stray magnetic field is present or metal particles are present between the readhead and the ring or radial positioning between the readhead and the ring is out of tolerances.                                 |
| <b>b0</b>                | Error - Acceleration error. The position data changed too fast. A stray magnetic field is present or metal particles are present between the readhead and the ring.<br>Warning - Overspeed. Ring is rotating faster than the limit (10 000 RPM). |

### Persistent encoder status

This is similar to "Encoder status" but with the added functionality that all detailed statuses are accumulated. Any error or warning that appears in Detailed Status during operation of encoder is copied into Persistent detailed status. Even if value in Detailed Status has very short duration, the past statuses can be read from this Persistent register. It keeps the value as long as power is present. Clearing is possible either with power cycle or by sending Unlock sequence and command "b". For details see document MBD03 available for download at [RLS media center](#).

### Encoder programming


Encoder supports changing default baud rate, running self-calibration function, reading signal level value, temperature, detailed status bits and setting automatic transmission of selected data packet at programmable frame rate. Additional information can be found in the "Application note: Programming encoders with Async serial interface", document number MBD03 available for download at [RLS media center](#).

# SPI - Serial peripheral interface

The Serial Peripheral Interface (SPI) bus is a four-wire bidirectional synchronous serial communication interface, typically used for short distance communication. It operates in full duplex mode, where master (controller) selects the slave with NCS line, generates clock signal on SCK line, sends command over MOSI line and receives data over MISO line.

AksIM-2 encoders provide either only position information via the SPI interface only or full register access via the EncoLink high-level protocol. For more information, refer to the document MBD08 available for download at [RLS media center](#).

## Electrical connection

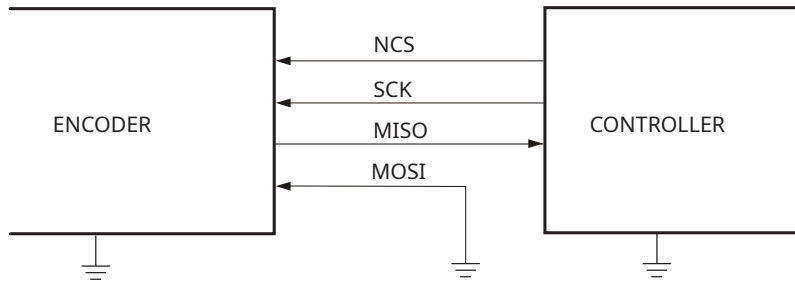


All data signals are 3.3 V LVTTTL. Inputs are 5 V tolerant. The maximum current sourced or sunk from signal lines should not exceed 5 mA. Single-ended signals should be as short as possible, especially when high frequencies are used.

Signal termination: 100  $\Omega$  resistors are added in series with all SPI signals.

| Signal      | Description  |
|-------------|--|
| <b>NCS</b>  | Active low. NCS line is used for synchronisation between master and slave devices. During communication it must be held low. Idle is high. When NCS is high, MISO line is in high-Z mode. This allows connection of multiple slaves in parallel, sharing all lines except NCS. Encoder position data is latched on falling edge of NCS signal. |
| <b>SCK</b>  | Serial clock. Shifts out the data on rising edge. Data is stable and valid on falling edge.  |
| <b>MOSI</b> | Master output → Slave input. Command from the controller to encoder. If only position data is required, this signal should always be zero. It can be tied to GND.  |
| <b>MISO</b> | Master input ← Slave output. Data is output on rising edge on SCK after NCS low and must be sampled on falling edge. When NCS is high, MISO line is in high-Z mode.  |

## SPI timing diagram

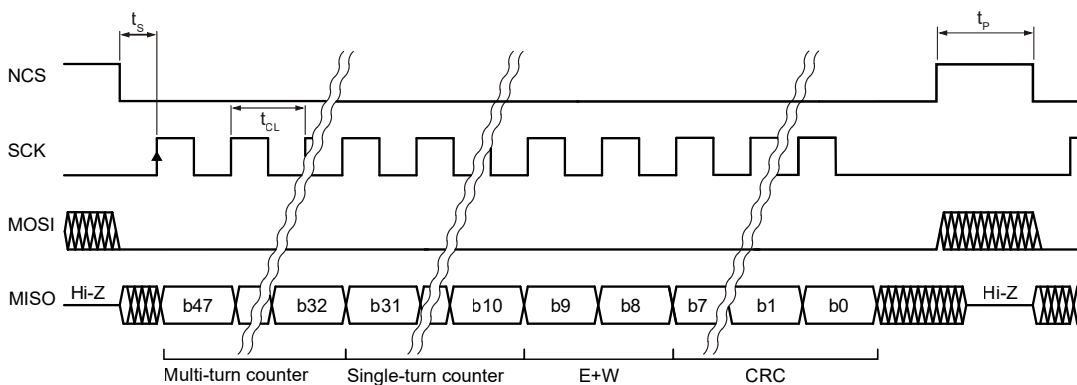

The controller starts the communication by setting the NCS signal low. At the same time the encoder position is latched. A delay of  $t_s$  is required to allow the encoder to prepare the data which is then shifted to MISO output on rising edges of clock signal SCK. Encoder Position and General Status (active low) data is transmitted, followed by CRC (inverted) of the entire data packet.

## SPI - Serial peripheral interface continued

### Communication parameters

| Parameter                                   | Symbol  | Min       | Max   |
|---|---|-----------|-------|
| Clock period                                | $t_{CL}$  | 250 ns    |       |
| Clock frequency                             | $f_{CL}$  |           | 4 MHz |
| Time after NCS low to first SCK rising edge | $t_S$   | 5 $\mu$ s |       |
| Pause time                                  | $t_P$   | 5 $\mu$ s |       |
| SPI settings                                | CPOL = 0 (clock is idle low)<br>CPHA = 1 data is output on clock rising edge and sampled on clock falling edge) |           |       |

### Encoder position data structure

| For multiturn  |           |  |
|----------------|-----------|--|
| 2B             | b47 : b32 | Multiturn counter (if specified in part number) – Left aligned, MSB first.                       |
| 3B             | b31 : b10 | Encoder position + zero padding bits – Left aligned, MSB first.                                  |
|                | b9        | Error – If low, the position data is not valid.  |
|                | b8        | Warning - If low, the position data is valid, but some operating conditions are close to limits. |
| 1B             | b7 : b0   | Inverted CRC, 0x97 polynomial  |
| For singleturn |           |  |
| 3B             | b31 : b10 | Encoder position + zero padding bits – Left aligned, MSB first.                                  |
|                | b9        | Error – If low, the position data is not valid.  |
|                | b8        | Warning – If low, the position data is valid, but some operating conditions are close to limits. |
| 1B             | b7 : b0   | Inverted CRC, 0x97 polynomial  |

CRC calculation example is in application note document CRCD01, available for download at [RLS media center](#).

### Encoder programming

Encoder supports running self-calibration function, reading signal level value, temperature, detailed status bits, identification information and other diagnostic values.

Additional functions are available with use of EncoLink libraries. In that case the MOSI signal must be connected between controller and encoder.

For more information please refer to document MBD08 available for download at [RLS media center](#).



# PWM - Pulse width modulation interface

The PWM communication interface consists of two digital signals: the Status signal and the PWM Out signal.

## Electrical connection

The Status and PWM Out signals are 3.3 V TTL compatible. These signal outputs are weakly ESD protected, so the readhead must be handled with extra care and ESD protection in ESD controlled environment.

Maximum current sourced from or sunk into signal lines should not exceed 5 mA.

## Status signal

The Status signal indicates the current status of the encoder. The Status signal is high for normal operation and valid position information. The low state of the Status signal indicates an error state of the encoder which may be caused by:

- Operation outside the installation tolerances
- Invalid or damaged magnetization of the ring
- Sensor malfunction
- System error
- No power supply


When the Status signal is low, the PWM Out signal is low and no pulses are output.

The encoder position is latched on the rising edge of the PWM Out signal. The Status signal should also be checked at the rising edge of the PWM Out signal. If the Status signal changes during the PWM period, this has no effect on the currently transmitted position information. Status output signal is not linked to the PWM output cycle and is updated with each internal cycle of the encoder. Pulses can be present as short as 50  $\mu$ s.

## PWM Out signal

The PWM Out is a pulse width modulation output with 16-bit resolution whose duty cycle is proportional to the measured position. The change of the pulse width by  $PW_{min}$  corresponds to a position change by one count (angle change for  $360^\circ / 65536 \approx 0.00549^\circ$ ).

## PWM Out signal timing diagram

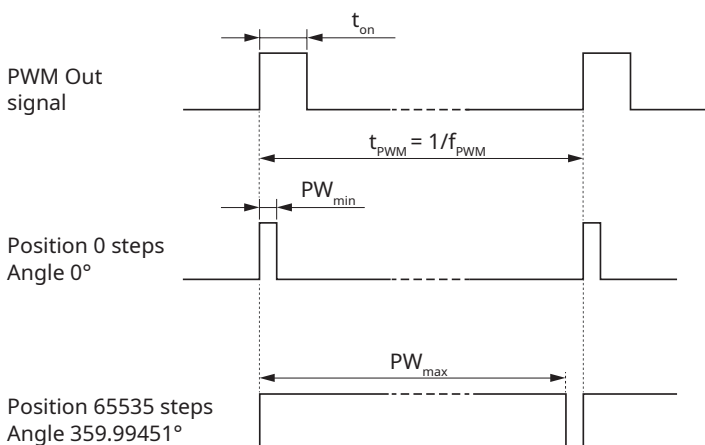

## Communication parameters

*Communication interface variant* in the part number defines the PWM frequency and all other dependent parameters.

| Parameter              | Symbol            | Communication interface variant |         |         |         |           | Unit | Note  |
|------------------------|-------------------|---------------------------------|---------|---------|---------|-----------|------|---|
|                        |                   | A                               | B       | C       | D       | E         |      |   |
| PWM frequency          | $f_{\text{PWM}}$  | 122.07                          | 274.66  | 366.21  | 549.32  | 1098.63   | Hz   |   |
| Signal period          | $t_{\text{PWM}}$  | 8192                            | 3640.89 | 2730.67 | 1820.44 | 910.22    | µs   |   |
| Minimum pulse width    | $PW_{\text{min}}$ | 0.125                           | 0.0556  | 0.0417  | 0.0278  | 0.0278 ** | µs   | Position 0 (Angle 0°)                                 |
| Maximum pulse width    | $PW_{\text{max}}$ | 8191.875                        | 3640.83 | 2730.63 | 1820.42 | 910.20 ** | µs   | Positions 65534 and 65535 *                           |
| Min. counter frequency | $f_{\text{CNTR}}$ | 8                               | 18      | 24      | 36      | 72        | MHz  | Receiving counter frequency                           |
| Resolution             |                   | 16 Bit                          | 16 Bit  | 16 Bit  | 16 Bit  | 16 Bit    |      | Fixed; resolution in part number must be set as "16B" |

\* Positions 65535 and 65534 are joined together; readout as 65534 ( $PW_{\text{max}}$ ).


\*\* At frequency 1099 Hz positions 0 and 1 are joined together; readout as 1 ( $PW_{\text{min}}$ ). Positions 65535, 65534 and 65533 are joined together; readout as 65533 ( $PW_{\text{max}}$ ).

$$Position \text{ [counts]} = \frac{t_{\text{on}} \times 65536}{t_{\text{PWM}}} - 1 \quad \quad Position \text{ [°]} = \frac{(t_{\text{on}} - PW_{\text{min}}) \times 360^\circ}{t_{\text{PWM}}}$$

# SSI - Synchronous serial interface

The encoder position in natural binary code and the encoder status are available via the SSI protocol. The SSI interface is not recommended for closed-loop applications and motor feedback because of the low update speed and the noticeable latency.

## Electrical connection

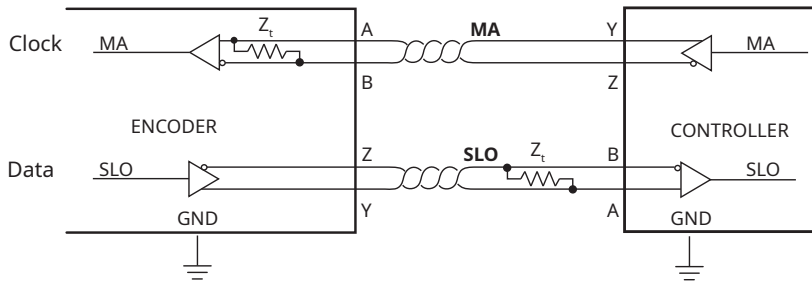


The Clock and Data signals are 5 V RS422-compatible differential pairs with RC termination within the readhead. If the total cable length is more than 5 m, termination on the controller is required. The nominal impedance of the cable should be 120  $\Omega$ .

## Output protection

An excessive output current and power dissipation caused by errors or bus conflicts are prevented by two mechanisms. A foldback current limit on the output stage provides immediate protection against short circuits. In addition, a thermal shutdown circuit forces the driver outputs into a high-impedance state, if the chip temperature becomes too high.

## SSI timing diagram

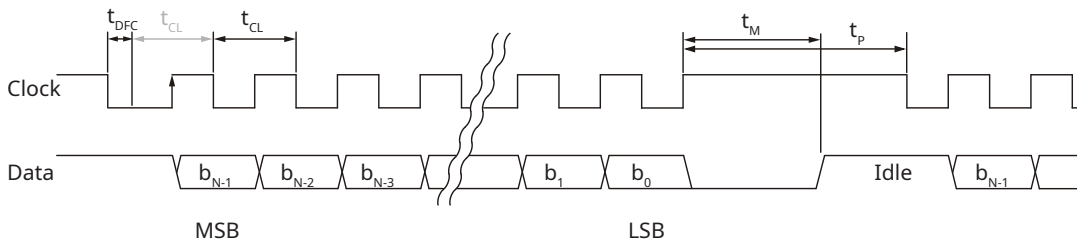


The controller requests the position and status data of the encoder by sending a pulse train to the Clock input. The Clock signal always starts from high. The first falling edge of the Clock latches the last position data available and on the first rising edge of the Clock the most significant bit (MSB) of the position is transmitted to the Data output. The Data output should then be read on the following falling or rising edge. On subsequent rising edges of the Clock signal the next bits are transmitted.

After the transmission of the last bit the Data output goes to low. When the  $t_M$  time expires, the Data output goes high. The Clock signal must remain high for at least  $t_p$  before the next reading can take place.

While reading the data, the half of a Clock period  $t_{CL}$  must always be less than  $t_M$ . However, reading the encoder position can be terminated at any time by setting the Clock signal to high for the duration of  $t_M$ .


## SSI - Synchronous serial interface continued

To allow updating of the position data at least  $t_B$  should pass between two subsequent readings. If the reading request arrives earlier than  $t_B$  after the previous reading, the encoder position will not be updated.

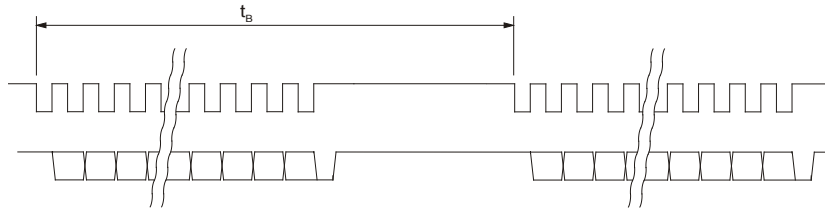

The power supply must be applied at least 100 ms before the clock sequence is being sent to the encoder.

### Maximum frequency

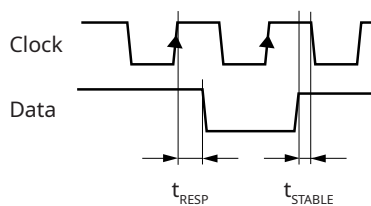


The readhead needs 170 ns to respond to incoming clocks ( $t_{RESP}$ ). Change on Data signal is delayed for 170 ns after the rising edge on Clock line. Additional delay is caused by the time the signal needs to propagate through cable to the readhead and back ( $t_{PROP}$ ). This delay is typically 14 ns per 1 meter of cable. Data signal must be stable for at least 10 % of the clock period length before the value is latched.

The clock frequency must be reduced with a longer cable. Total cable length must be taken into account, from the encoder to the receiver.

$$t_{DELAY} = t_{RESP} + t_{PROP} \times \text{cable length}$$

Frequency derating versus cable length:

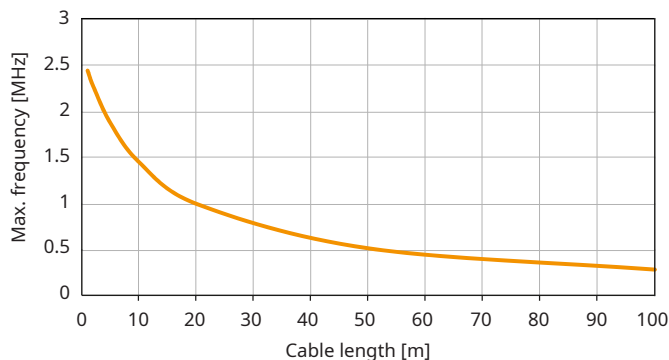

### Communication parameters

| Parameter               | Symbol     | Min        | Typ        | Max                 |
|-------------------------|------------|------------|------------|---------------------|
| Delay first clock       | $t_{DFC}$  | 1 $\mu$ s  |            | 10 $\mu$ s          |
| Clock period            | $t_{CL}$   | 2 $\mu$ s  |            | 20 $\mu$ s          |
| Clock frequency         | $f_{CL}$   | 80 kHz     |            | 500 kHz (2.5 MHz *) |
| Timeout (monoflop time) | $t_M$      |            | 20 $\mu$ s |                     |
| Request rate            | $t_B$      | 70 $\mu$ s |            |                     |
| Readhead response delay | $t_{RESP}$ |            | 170 ns     |                     |
| Latency                 |            | 55 $\mu$ s |            | 110 $\mu$ s         |

\* With Delay First Clock function on the controller.

## SSI - Synchronous serial interface continued

Start bit and idle line value are defined by the *Communication interface variant*.

| Communication interface variant | Line state selection         | Usage    |
|---------------------------------|------------------------------|----------|
| <b>B</b>                        | Start bit = 1; idle line = 1 | Standard |

### Structure of data packet

| Singleturn resolution | Bit number         |                  |                |                 |
|-----------------------|--------------------|------------------|----------------|-----------------|
|                       | Multiturn counter* | Encoder position | General status | Detailed status |
| <b>20 bits</b>        | b45 : b30          | b29 : b10        | b9 : b8        | b7 : b0         |
| <b>19 bits</b>        | b44 : b29          | b28 : b10        | b9 : b8        | b7 : b0         |
| <b>18 bits</b>        | b43 : b28          | b27 : b10        | b9 : b8        | b7 : b0         |
| <b>17 bits</b>        | b42 : b27          | b26 : b10        | b9 : b8        | b7 : b0         |

\* If selected in part number

| Multiturn counter (if selected in part number)   |  |
|--|--|
| <b>First 16 bits (see table above)</b>   | Multiturn counter - Occupying full 16 bits. Can be interpreted as signed number ( $\pm 32768$ ) or unsigned number (0 to 65535) that represents number of shaft turns.   |
| Encoder position   |  |
| <b>Following 17 to 20 bits (see table above)</b>   | Encoder position – Left aligned, MSB first, LSB last.  |
| General status   |  |
| <b>b9</b>  | Error bit. If set, the position is not valid.  |
| <b>b8</b>  | Warning bit. If set, the encoder operational is close to its limits. The position is still valid, but the resolution and/or accuracy might be out of specification.  |
| <p>The Error and Warning bits can be set at the same time, in this case the Error bit has priority.</p> <p>The colour of the LED on the readhead housing indicates the value of the General status bits:</p> <p>● Red = Error, ● Orange = Warning, ● Green = Normal operation, ○ No light = No power supply.</p> <p>The warning or error status is more closely defined by the Detailed status bits.</p> |  |
| Detailed status  |  |
| <b>b7</b>  | Warning - Signal amplitude too high. The readhead is too close to the ring or an external magnetic field is present.   |
| <b>b6</b>  | Warning - Signal amplitude low. The distance between the readhead and the ring is too large.   |
| <b>b5</b>  | Error - Signal lost. The readhead is out of alignment with the ring or the ring is damaged.  |
| <b>b4</b>  | Warning - Temperature. The readhead temperature is out of specified range.   |
| <b>b3</b>  | Error - Power supply error. The readhead power supply voltage is out of specified range.   |
| <b>b2</b>  | Error - System error or Multiturn error. Malfunction inside the circuitry or inconsistent calibration data is detected. To reset the System error bit try to cycle the power supply while the rise time is shorter than 20 ms.                   |
| <b>b1</b>  | Error - Magnetic pattern error. A stray magnetic field is present or metal particles are present between the readhead and the ring or radial positioning between the readhead and the ring is out of tolerances.                                 |
| <b>b0</b>  | Error - Acceleration error. The position data changed too fast. A stray magnetic field is present or metal particles are present between the readhead and the ring.<br>Warning - Overspeed. Ring is rotating faster than the limit (10 000 RPM). |

# Part numbering

## Readhead

|  | MB  | 049   | DC  | C    | 18B  | D     | N | T | 00 |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
|--|-----|-------|-----|------|------|-------|---|---|----|---|---|---|---|---|-----|-----|-------|-----|-------|-----|-----|------|-------|
| <b>Series</b>  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| MB - AksIM board-level readhead  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <b>MRA ring compatibility</b>  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 022 - For use with MRA022 ring   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 029 - For use with MRA029 ring      053 - For use with MRA053 ring   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 039 - For use with MRA039 ring      064 - For use with MRA064 ring   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 049 - For use with MRA049 ring      080 - For use with MRA080 ring   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <b>Communication interface</b>   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| DC - BiSS C, RS422   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| SF - Asynchronous serial, RS422      PW - Pulse Width Modulation (PWM), LVTTTL   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| SP - SPI (Serial peripheral interface), LVTTL      SC - Synchronous serial interface (SSI), RS422 *  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| * Not recommended for new design   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <b>Communication interface variant</b>   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| See table next to the description of the chosen communication interface for detailed information   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| For DC: C - BiSS-C, bidirectional, 13 ACK bits, with register access   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| For SC: B - Start bit and idle data line 1   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| For SP: L - SPI  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| For SF: Link speed in kbps:  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| For PW: Base frequency in Hz:  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td><td>F</td><td>G</td></tr><tr><td>115.2</td><td>128</td><td>230.4</td><td>256</td><td>500</td><td>1000</td><td>921.6</td></tr></table> |     |       |     |      |      |       |   |   |    | A | B | C | D | E | F   | G   | 115.2 | 128 | 230.4 | 256 | 500 | 1000 | 921.6 |
| A  | B   | C     | D   | E    | F    | G     |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 115.2  | 128 | 230.4 | 256 | 500  | 1000 | 921.6 |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <table><tr><td>A</td><td>B</td><td>C</td><td>D</td><td>E</td></tr><tr><td>122</td><td>275</td><td>366</td><td>549</td><td>1099</td></tr></table>   |     |       |     |      |      |       |   |   |    | A | B | C | D | E | 122 | 275 | 366   | 549 | 1099  |     |     |      |       |
| A  | B   | C     | D   | E    |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 122  | 275 | 366   | 549 | 1099 |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <b>Resolution</b>  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 16B - 16 bits per revolution      Multiturn counter options  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 17B - 17 bits per revolution      17M - 17 bits per revolution + 16 bits multiturn counter   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 18B - 18 bits per revolution      18M - 18 bits per revolution + 16 bits multiturn counter   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 19B - 19 bits per revolution      19M - 19 bits per revolution + 16 bits multiturn counter   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 20B - 20 bits per revolution      20M - 20 bits per revolution + 16 bits multiturn counter   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <b>Shape and connector orientation</b>   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| D - Partial arc, radial connector exit   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| E - Partial arc, tangential connector exit   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| F - Full circle, radial connector exit   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| G - Full circle, axial connector exit  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <b>Connector option</b>  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| N - FCI / AMP 10114830-11108LF - 8 pin, horizontal connector   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| FCI / AMP 10114828-11108LF - 8 pin, vertical connector (readhead MB022 only)   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| P - Soldering pads   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <b>Option</b>  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| T - Extended temperature range (standard)  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| L - Extended low temperature range, -40 °C to +85 °C   |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| P - High pressure (up to 600 bar)**  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| ** See chapter <b>Operation in high-pressure applications</b> .  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| <b>Special requirements</b>  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |
| 00 - No special requirements (standard)  |     |       |     |      |      |       |   |   |    |   |   |   |   |   |     |     |       |     |       |     |     |      |       |

Not all part number combinations are valid. Please refer to the table of available combinations on the next page.

**Table of available combinations**

| Series | Ring compatibility | Communication interface | Communication interface variant | Resolution             | Shape & connector orientation | Connector option       | Option   | Special requirements |       |
|--------|--------------------|-------------------------|---------------------------------|------------------------|-------------------------------|------------------------|----------|----------------------|-------|
| MB     | 022                | DC                      | C                               | 17B / 17M              | G                             | N                      | L        | 00                   |       |
|        |                    | SF                      | A / B / C / D / E / F / G       |                        |                               |                        |          |                      |       |
|        |                    | SC                      | B                               |                        |                               |                        |          |                      |       |
|        | 029                | DC                      | C                               | 17B - 18B<br>17M - 18M | F                             | N / P                  | T<br>P * |                      |       |
|        |                    | SF                      | A / B / C / D / E / F / G       |                        |                               | N                      |          |                      |       |
|        |                    | SP                      | L                               |                        |                               |                        |          |                      |       |
|        |                    | PW                      | A / B / C / D / E               | 16B                    |                               |                        |          |                      |       |
|        |                    | SC                      | B                               | 17B - 18B<br>17M - 18M |                               | N / P                  |          |                      |       |
|        | 039                | DC                      | C                               | 17B - 19B<br>17M - 19M | E                             |                        |          |                      | N     |
|        |                    | SF                      | A / B / C / D / E / F / G       |                        |                               |                        |          |                      |       |
|        |                    | SP                      | L                               |                        |                               | 16B                    |          |                      |       |
|        |                    | PW                      | A / B / C / D / E               |                        |                               |                        |          |                      |       |
|        |                    | SC                      | B                               | D                      |                               | N / P                  |          |                      |       |
|        | 049                | DC                      | C                               |                        | 17B - 19B<br>17M - 19M        | N / P                  |          |                      |       |
|        |                    | SF                      | A / B / C / D / E / F / G       |                        |                               |                        |          |                      |       |
|        |                    | SP                      | L                               |                        |                               |                        |          |                      |       |
|        |                    | PW                      | A / B / C / D / E               |                        | 16B                           |                        |          |                      |       |
|        |                    | SC                      | B                               | 17B - 19B<br>17M - 19M | N                             |                        |          |                      |       |
|        |                    | DC                      | C                               |                        | N / P                         |                        |          |                      |       |
|        |                    | SF                      | A / B / C / D / E / F / G       |                        |                               |                        |          |                      |       |
|        | SC                 | B                       | E                               | N                      |                               |                        |          |                      |       |
|        | 053                | DC                      |                                 |                        | C                             | 17B - 20B<br>17M - 20M |          |                      | N / P |
|        |                    | SF                      |                                 |                        | A / B / C / D / E / F / G     |                        |          |                      |       |
|        |                    | SP                      |                                 |                        | L                             |                        |          |                      |       |
|        |                    | PW                      |                                 |                        | A / B / C / D / E             | 16B                    |          |                      |       |
|        |                    | SC                      | B                               | D                      | N / P                         |                        |          |                      |       |
|        | 064                | DC                      | C                               |                        |                               | 17B - 20B<br>17M - 20M |          |                      | N     |
|        |                    | SF                      | A / B / C / D / E / F / G       |                        |                               |                        |          |                      |       |
|        |                    | SP                      | L                               |                        |                               |                        |          |                      |       |
|        |                    | PW                      | A / B / C / D / E               |                        |                               | 16B                    |          |                      |       |
|        |                    | SC                      | B                               | 17B - 20B<br>17M - 20M | N / P                         |                        |          |                      |       |
|        | 080                | DC                      | C                               |                        |                               | 17B - 20B<br>17M - 20M |          |                      | N     |
|        |                    | SF                      | A / B / C / D / E / F / G       |                        |                               |                        |          |                      |       |
|        |                    | SP                      | L                               |                        |                               |                        |          |                      |       |
|        |                    | PW                      | A / B / C / D / E               |                        |                               | 16B                    |          |                      |       |
| SC     |                    | B                       | 17B - 20B<br>17M - 20M          |                        |                               |                        |          |                      |       |

\* Specific configurations only. See chapter **Operation in high-pressure applications**.

## Magnetic ring

|  | MRA | 049 | B | C | 025 | D | S | E | 00 |
|--|-----|-----|---|---|-----|---|---|---|----|
| <b>Series</b>  |     |     |   |   |     |   |   |   |    |
| MRA - AksIM magnetic ring  |     |     |   |   |     |   |   |   |    |
| <b>Outer diameter and readhead compatibility</b>                       |     |     |   |   |     |   |   |   |    |
| 022 - 22 mm      053 - 53 mm   |     |     |   |   |     |   |   |   |    |
| 029 - 29 mm      064 - 64 mm   |     |     |   |   |     |   |   |   |    |
| 039 - 39 mm      080 - 80 mm   |     |     |   |   |     |   |   |   |    |
| 049 - 49 mm  |     |     |   |   |     |   |   |   |    |
| <b>Thickness</b>   |     |     |   |   |     |   |   |   |    |
| A - 3.9 mm      G - 7 mm   |     |     |   |   |     |   |   |   |    |
| B - 2.0 mm      H - 5.4 mm   |     |     |   |   |     |   |   |   |    |
| D - 4.9 mm   |     |     |   |   |     |   |   |   |    |
| <b>Installation type</b>   |     |     |   |   |     |   |   |   |    |
| C - Countersunk holes (use flat-head fasteners DIN 965 / 7046)         |     |     |   |   |     |   |   |   |    |
| F - Flat-bottom counterbored holes (use socket head fasteners DIN 912) |     |     |   |   |     |   |   |   |    |
| G - Glue   |     |     |   |   |     |   |   |   |    |
| P - Press-fit  |     |     |   |   |     |   |   |   |    |
| <b>Inner diameter</b>  |     |     |   |   |     |   |   |   |    |
| 008 - 8 mm      025 - 25 mm      055 - 55 mm                           |     |     |   |   |     |   |   |   |    |
| 010 - 10 mm      030 - 30 mm      064 - 64 mm                          |     |     |   |   |     |   |   |   |    |
| 013 - 12.7 mm      034 - 34 mm      068 - 68 mm                        |     |     |   |   |     |   |   |   |    |
| 020 - 20 mm      040 - 40 mm   |     |     |   |   |     |   |   |   |    |
| <b>Accuracy grade</b>  |     |     |   |   |     |   |   |   |    |
| D - Standard for stamped rings   |     |     |   |   |     |   |   |   |    |
| E - Standard for machined rings  |     |     |   |   |     |   |   |   |    |
| <b>Material</b>  |     |     |   |   |     |   |   |   |    |
| M - Machined stainless steel hub with CPE rubber                       |     |     |   |   |     |   |   |   |    |
| S - Stamped metal plate with CPE rubber                                |     |     |   |   |     |   |   |   |    |
| <b>Zero marking</b>  |     |     |   |   |     |   |   |   |    |
| E - Engraved   |     |     |   |   |     |   |   |   |    |
| H - Hole   |     |     |   |   |     |   |   |   |    |
| N - None   |     |     |   |   |     |   |   |   |    |
| <b>Special requirements</b>  |     |     |   |   |     |   |   |   |    |
| 00 - No special requirements (standard)                                |     |     |   |   |     |   |   |   |    |

Not all part number combinations are valid. Please refer to the table of available combinations on the next page.



Table of available combinations

| Series | Outer diameter and readhead compatibility | Thickness | Installation type | Inner diameter | Accuracy grade | Material | Zero marking | Special requirements |
|--------|---|-----------|-------------------|----------------|----------------|----------|--------------|----------------------|
| MRA    | 022                                       | H         | P                 | 008            | D              | M        | N            | 00                   |
|        | 029                                       | B         | C                 | 010            |                | S        | E            |                      |
|        |   | G         | P                 | 013            |                | M        | N            |                      |
|        | 039                                       | B         | C                 | 020            |                | S        | E            |                      |
|        | 049                                       | A         | F                 | 025            | E              | M        | H            |                      |
|        |   | B         | C                 |                | D              | S        | E            |                      |
|        | G   |           | 034               | N              |                |          |              |                      |
|        | C   |           | 030               | E              |                |          |              |                      |
|        | G   |           | 040               | N              |                |          |              |                      |
|        | 053                                       |           |                   | C              |                |          | H            |                      |
|        | 064                                       |           | C                 | E              |                |          |              |                      |
|        | 080                                       | A         | F                 | 055            | E              | M        | H            |                      |
|        |   | B         | C                 |                | D              | S        | E            |                      |
|        |   |           | G                 | 064            |                |          | N            |                      |
|        |   | D         | F                 | 068            |                | M        | H            |                      |

Available ring part numbers:

MRA022HP008DMN00  
 MRA029BC010DSE00  
 MRA029GP013DMN00  
 MRA039BC020DSE00  
 MRA049AF025EMH00  
 MRA049BC025DSE00  
 MRA049BG034DSN00  
 MRA053BC030DSE00  
 MRA053BG040DSN00  
 MRA064BC040DSE00  
 MRA080AF055EMH00  
 MRA080BC055DSE00  
 MRA080BG064DSN00  
 MRA080DF068DMH00

## Accessories



Cable assembly, 1 m  
**ACC015**  
**ACC049**



Cable assembly, 1 m  
**ACC016**  
**ACC065**



Cable assembly, 3 m  
**ACC061**  
**ACC070**



Magnet viewer  
**MM0001**



USB interface (for BiSS C  
communication interface)  
**E201-9B**



USB interface (for SSI  
communication interface)  
**E201-9S**



USB interface (for SPI EncoLink  
and PWM communication  
interface)  
**E201-9P**




Shims for height adjustment  
of the readheads  
**MB-ACC**

For technical details about cable assemblies and pinout see chapter **Cable assemblies.**

## Cable assemblies

| Compatible readhead                      | Part number | Diameter | Length | Connector 1   | Connector 2  | Notes                                  |
|--|-------------|----------|--------|---|--------------|--|
| Every readhead with connector option "N" | ACC015      | 5 mm     | 1.0 m  | FCI / AMP<br>10114826-00008LF and<br>10114827-002LF | Flying leads | Twisted pairs, shielded, up to +100 °C |
|  | ACC016      |          |        |   | DSUB-9 M     |  |
|  | ACC061      |          | 3.0 m  |   | Flying leads |  |
|  | ACC049      | 6.2 mm   | 1.0 m  |   | Flying leads | Twisted pairs, shielded, up to +75 °C  |
|  | ACC065      |          |        |   | DSUB-9 M     |  |
|  | ACC070      |          | 3.0 m  |   | Flying leads |  |

Dimensions in mm.

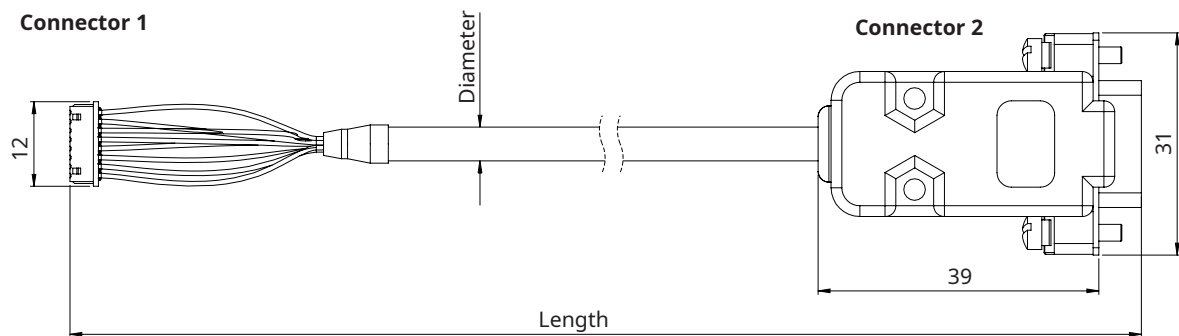

| Connector 1<br>FCI / AMP<br>10114826-00008LF |   | Connector 2<br>DSUB-9 M |                            |                     |      |            |        |
|--|---|-------------------------|----------------------------|---------------------|------|------------|--------|
| Pin number                                   |   | Wire color              | BISS C                     | Asynchronous serial | SPI  | PWM        | SSI    |
| 1  |   | Shield                  |                            |                     |      |            |        |
| 1  | 5 | Brown                   | 5 V supply                 |                     |      |            |        |
| 2  | 9 | White                   | 0 V (GND)                  |                     |      |            |        |
| 3  | 8 | Pink                    | Temperature sensor pin 1 * |                     |      |            |        |
| 4  | 4 | Grey                    | Temperature sensor pin 2 * |                     |      |            |        |
| 5  | 2 | Red                     | MA+                        | RX command in +     | SCK  | Status out | Clock+ |
| 6  | 3 | Blue                    | MA-                        | RX command in -     | NCS  | -          | Clock- |
| 7  | 6 | Green                   | SLO+                       | TX data out +       | MISO | PWM out    | Data+  |
| 8  | 7 | Yellow                  | SLO-                       | TX data out -       | MOSI | -          | Data-  |

\* See chapter **External isolated temperature sensor**

### Cable specifications

|                                 |   |  |
|---------------------------------|---|--|
| <b>Part numbers</b>             | ACC015, ACC016, ACC061  | ACC049, ACC065, ACC070   |
| <b>Cable specifications</b>     | LI12YC12Y   | LiYCY (TP)   |
| <b>Configuration</b>            | 4 × 2 × 0.14 mm <sup>2</sup> (twisted pairs)  | 4 × 2 × 0.14 mm <sup>2</sup> (twisted pairs)   |
| <b>Rated voltage</b>            | 250 V   | 350 V  |
| <b>Temperature range</b>        | Operating -30 °C to +100 °C<br>Storage -40 °C to +105 °C<br>Not valid for cables with DSUB-9 M connector. | Operating -40 °C to +75 °C (fixed)<br>-5 °C to +70 °C (bending)<br>Storage -40 °C to +80 °C  |
| <b>Environmental compliance</b> | RoHS conform<br>73/23/EEG-Guideline CE conform<br>Halogen free<br>REACH compliant                         | RoHS and REACH compliant<br>Flame-retardant according IEC 60332-1-2<br>Approvals based on VDE 0812<br>Classification ETIM 5.0 Class-ID: EC000104 |

ACC016 and ACC065 can be used for direct connection to E201-9S or E201-9B USB encoder interface.

ACC015, ACC016 and ACC061 may be discontinued in future.

## Head office

### RLS Merilna tehnika d.o.o.

Poslovna cona Žeje pri Komendi  
Pod vrbami 2  
SI-1218 Komenda  
Slovenia

**T** +386 1 5272100

**E** [mail@rls.si](mailto:mail@rls.si)

[www.rls.si](http://www.rls.si)

## Global support

Visit our [website](#) to contact your nearest sales representative.

## Document issues

| Issue | Date        | Page  | Description                                 |
|-------|-------------|-------|---|
| 10    | 21. 3. 2022 | 6-7   | Amended tolerances on ring MRA029GP013DMN00 |
| 11    | 6. 5. 2024  | 2, 43 | Part numbering and SSI chapter amended      |
|       |             | 4-19  | Mounting dimensions amended                 |
|       |             | 21    | Installation tolerances amended             |
|       |             | 23    | System data amended                         |
|       |             | -     | Plastoferrite rings removed                 |
|       |             | 36-38 | Persistent encoder status added             |
|       |             | 46    | Part numbering amended                      |
|       |             | 50    | Accessories added                           |

This product is not designed or intended for use outside the environmental limitations and operating parameters expressly stated on the product's datasheet. Products are not designed or intended for use in medical, military, aerospace, automotive or oil & gas applications or any safety-critical applications where a failure of the product could cause severe environmental or property damage, personal injury or death. Any use in such applications must be specifically agreed to by seller in writing, and is subject to such additional terms as the seller may impose in its sole discretion. Use of products in such applications is at buyer's own risk, and buyer will indemnify and hold harmless seller and its affiliates against any liability, loss, damage or expense arising from such use. Information contained in this datasheet was derived from product testing under controlled laboratory conditions and data reported thereon is subject to the stated tolerances and variations, or if none are stated, then to tolerances and variations consistent with usual trade practices and testing methods. The product's performance outside of laboratory conditions, including when one or more operating parameters is at its maximum range, may not conform to the product's datasheet. Further, information in the product's datasheet does not reflect the performance of the product in any application, end-use or operating environment buyer or its customer may put the product to. Seller and its affiliates make no recommendation, warranty or representation as to the suitability of the product for buyer's application, use, end-product, process or combination with any other product or as to any results buyer or its customer might obtain in their use of the product. Buyer should use its own knowledge, judgment, expertise and testing in selecting the product for buyer's application, end-use and/or operating environment, and should not rely on any oral or written statement, representation, or samples made by seller or its affiliates for any purpose. EXCEPT FOR THE WARRANTIES EXPRESSLY SET FORTH IN THE SELLER'S TERMS AND CONDITIONS OF SALE, SELLER MAKES NO WARRANTY EXPRESS OR IMPLIED WITH RESPECT TO THE PRODUCT, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE, WHICH ARE DISCLAIMED AND EXCLUDED. All sales are subject to seller's exclusive terms and conditions of sale which, where the seller is (a) RLS Merilna tehnika d. o. o., are available at <https://www.rls.si/eng/salesterms>, (b) Renishaw, Inc., are available at <https://www.renishaw.com/legal/en/-/42186>, or (c) another person, are available on request, and in each case, are incorporated herein by reference, and are the exclusive terms of sale. No other terms and conditions apply. Buyer is not authorized to make any statements or representations that expand upon or extend the environmental limitations and operating parameters of the products, or which imply permitted usage outside of that expressly stated on the datasheet or agreed to in writing by seller.

RLS Merilna tehnika d. o. o. has made considerable effort to ensure the content of this document is correct at the date of publication but makes no warranties or representations regarding the content. RLS Merilna tehnika d. o. o. excludes liability, howsoever arising, for any inaccuracies in this document. © 2024 RLS d. o. o.