


DPB51



True RMS 3-Phase voltage monitoring relay

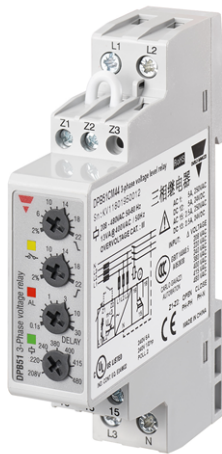

Benefits

- **Wide voltages range.** Working in systems from 208 to 480 VAC.
- **Adjustable voltage levels and time delay.** To allow a correct response to real alarm conditions.
- **Output and status LED indication.** For quick troubleshooting.
- **Ultra-high harmonic immunity.** For very noisy environments.
- **High Compactness.** 17.5 mm DIN rail housing.

Description

DPB51 is a multifunction 3-phase mains monitoring relay.

It operates on 3P and 3P+N systems, monitoring phase loss and phase sequence, overvoltage and undervoltage.

Power supply provided by the monitored mains.

Delay on alarm, up to 30 s, for over/under voltage alarms.

For mounting on DIN-rail or back panel.


Main features

- Monitoring 3-phase mains with 3 wires (3P) or 4 wires (3P+N).
- Detection of the correct phase sequence and phase loss.
- Front dial adjustable overvoltage and undervoltage setpoints.
- Time delay.
- Changeover relay output.

Order code

| Mounting | Frequency | Power supply | Component name/part number |
|----------|------------|----------------|----------------------------|
| DIN-rail | 50 - 60 Hz | 208 to 480 VAC | DPB51CM44 |

Structure

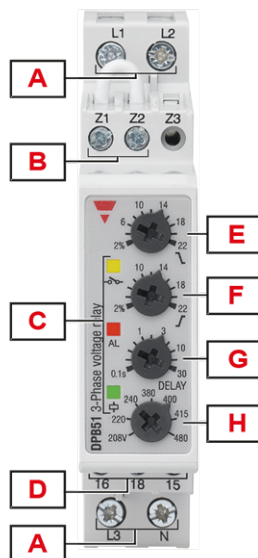

| Element | Component | Function |
|---------|----------------------------|--|
| A | Input terminals | Connection of the line voltages (neutral when present) |
| B | Mains type terminals | No connection: delta voltage Connected: star voltage |
| C | Information LEDs | Yellow for relay output status Red for signal alarm status Green for device ON |
| D | Output terminals | SPDT relay output |
| E | Undervoltage dial (V) | Undervoltage setpoint adjustment |
| F | Overvoltage dial (V) | Overvoltage setpoint adjustment |
| G | Delay time dial | Setting the alarm ON delay time |
| H | Mains nominal voltage dial | Mains nominal voltage adjustment |

Features

Power supply

| | |
|----------------------|--|
| Power supply | Supplied by measured phases (L1, L2) |
| Overvoltage category | III (IEC 60038) |
| Voltage range | 208 to 480 V _{L-L} AC $\pm 15\%$ (177 to 552 V) |
| Frequency range | 50 to 60 Hz $\pm 10\%$ sinusoidal waveform |
| Consumption | < 13 VA |
| Power ON delay | 1 s ± 0.5 s |

Inputs

| | | |
|----------------------|---|---|
| Terminals | L1, L2, L3, N | |
| Measured variables | Phase sequence | |
| | Phase loss | |
| | 3P: voltages V _{L12} , V _{L23} , V _{L31} | |
| | 3P+N: voltages V _{L1N} , V _{L2N} , V _{L3N} | |
| Nominal line range | 208 to 480 VAC $\pm 15\%$ (177 to 550 VAC) | |
| Nominal voltages (*) | Delta voltage (3P) | 208 V, 220 V, 240 V, 380 V, 400 V, 415 V, 480 V |
| | Star voltage (3P+N) | 120 V, 127 V, 140 V, 220 V, 230 V, 240 V, 277 V |

(*) **Note:** connect the neutral only if it is intrinsically at the star centre.

Outputs


| | |
|---------------------|---|
| Terminals | 15, 16, 18 |
| Number of outputs | 1 |
| Type | SPDT electromechanical relay with changeover contacts |
| Logic | Output de-energised on alarm |
| Contact rating | Ith: 5 A @ 250 VAC AC15: 2.5 A @ 250 VAC DC12: 5 A @ 24 VDC DC13: 2.5 A @ 24 VDC |
| Electrical lifetime | $\geq 50 \times 10^3$ operations (at 5 A, 250 V, $\cos \varphi = 1$) |
| Mechanical lifetime | $> 30 \times 10^6$ operations |
| Assignment | Associated to all alarm types |

Insulation

| Terminals | Basic |
|---|--|
| Inputs: L1, L2, L3, N to output: 15, 16, 18 | 2.5 kVrms, 4 kV impulse 1.2/50 μ s |

General

| | |
|------------------------|---|
| Material | Polyamide (Nylon) (PA66/6) or Phenylene ether + Polystyrene (PPE-PS) |
| | Flammability rating: HB according to UL 94 |
| Colour | RAL7035 (light grey) |
| Dimensions (W x H x D) | 17.5 x 90 x 67.2 mm (0.68 x 3.54 x 2.65 in) |
| Weight | 100 g (3.53 oz) |
| Terminals | Cable size from 0.05 to 2.5 mm ² (AWG30 to AWG13), stranded or solid |
| Tightening torque | Max. 0.8 Nm (7.08 lbin) |
| Terminal type | Screw terminals |

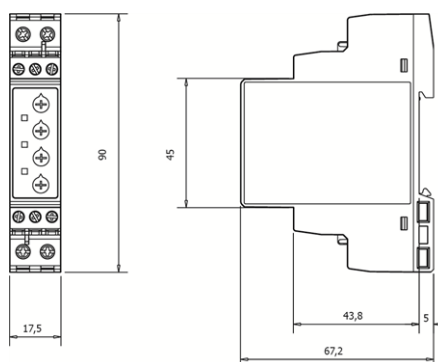

Environmental

| | |
|------------------------|------------------------------|
| Operating temperature | -20 to 60 °C (-4 to 140 °F) |
| Storage temperature | -30 to 80 °C (-22 to 176 °F) |
| Relative humidity | 5 - 95% non condensing |
| Protection degree | IP20 |
| Pollution degree | 3 |
| Operating max altitude | 2000 m amsl (6560 ft) |
| Salinity | Non saline environment |
| UV resistance | No |





Vibration/Shock resistance

| Test condition | Test | Level |
|----------------------------|--------------------------------------|---------|
| Tests with unpacked device | Vibration response (IEC60255-21-1) | Class 1 |
| | Vibration endurance (IEC 60255-21-1) | Class 1 |
| | Shock (IEC 60255-21-2) | Class 1 |
| | Bump (IEC 60255-21-2) | Class 1 |
| Tests with packed device | Vibration random (IEC60068-2-64) | Class 1 |
| | Shock (IEC 60255-21-2) | Class 1 |
| | Bump (IEC 60255-21-2) | Class 1 |

Class 1: monitoring devices for normal use in power plants, substations and industrial plants and for normal transportation conditions.

The packaging type is designed and implemented in such manner that the severity class parameters will not be exceeded during transportation.

Compatibility and conformity

| | |
|------------|---|
| Marking |   |
| Directives | 2014/35/EU (LVD - Low voltage) 2014/30/EU (EMC - Electromagnetic compatibility) |
| Standards | Insulation coordination: EN 60664-1 Immunity: EN61000-6-2 Emission: EN61000-6-3 |
| Approvals |  (UL508)  (GB/T14048.5) |

Operating description

Device configuration

The relay operates when all the phases are present, the phase sequence is correct and the phase-phase voltage levels are within set limits.

The relay releases when one or more phase-phase voltages exceeds the upper set level or drops below the lower set level.

| Undervoltage adjustment dial | |
|------------------------------|--------------------------------|
| Typology | Linear selection from 2 to 22% |
| Resolution | 2% setpoint increase per notch |
| Function | Relative undervoltage setpoint |

| Overvoltage adjustment dial | |
|-----------------------------|--------------------------------|
| Typology | Linear selection from 2 to 22% |
| Resolution | 2% setpoint increase per notch |
| Function | Relative overvoltage setpoint |

| Delay setting dial | |
|--------------------|---|
| Typology | Logarithmic adjustment from 0.1 to 30 s |
| Resolution | From 100 ms/notch at 0.1 s to 10 s/notch at 30 s |
| Function | Alarm ON delay setting for undervoltage and overvoltage |

| Mains nominal voltage setting dial | |
|------------------------------------|--|
| Function | Selection of mains nominal voltage value |

Alarms

DPB51 operates in 2 different modes depending upon the alarm type:

- Phase loss and incorrect phase sequence cause immediate output relay de-energisation.
- Under or over voltage triggering cause output relay to turn OFF at the end of set delay.

| Phase loss alarm | |
|------------------|--|
| Input variables | L1-L2, L2-L3 and L3-L1 |
| Alarm setpoint | One phase $\leq 85\%$ of the rated value (regenerated voltage detection) |
| Restore setpoint | All phases $> 85\%$ of the rated value + Hysteresis |
| Reaction time | ≤ 200 ms |
| Delay ON | < 200 ms |
| Delay OFF | < 200 ms |

| Phase sequence alarm | |
|----------------------|-----------------------|
| Input variables | Connection L1, L2, L3 |
| Reaction time | ≤ 200 ms |
| Delay ON | < 200 ms |
| Delay OFF | < 200 ms |


| Over / under voltage alarms | |
|-----------------------------|--|
| Input variables | 3P: voltages V_{L12} , V_{L23} , V_{L31} 3P+N: voltages V_{L1N} , V_{L2N} , V_{L3N} |
| Reaction time | ≤ 200 ms + set delay ON alarm |
| Undervoltage setting range | From -2 to -22% |
| Overvoltage setting range | From 2 to 22% |
| Repeatability | 0.5% on full scale |

| Over / under voltage alarms | |
|-----------------------------|---|
| Hysteresis | 1% (setpoint between 2% and 4%) 2% (setpoint between 4% and 22%) |
| Delay ON | Adjustable: from 0.1 to 30 s Accuracy: $\pm 10\%$ on set value ± 50 ms |
| Delay OFF | None |


Information LEDs

| Colour | Status | | Description |
|------------------------------|--------------|---------------|---|
| Green (∇) | Power supply | ON | Power supply ON |
| | | OFF | Power supply OFF |
| Red (AL) | Alarm | ON (steady) | Alarm situation is still present at the end of delay |
| | | OFF | Alarm OFF |
| | | Flashing 2 Hz | Under or overvoltage alarm triggered with a delay on alarm elapsing |
| | | Flashing 5 Hz | Phase loss or incorrect phase sequence alarm |
| Yellow (\sim) | Relay output | ON | Energised |
| | | OFF | De-energised |

Operating diagram

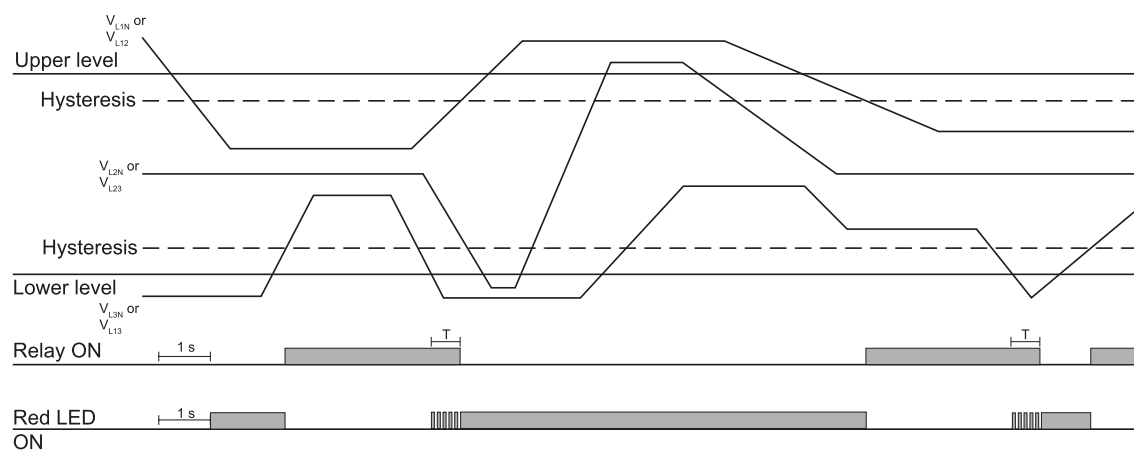


Over and undervoltage monitoring

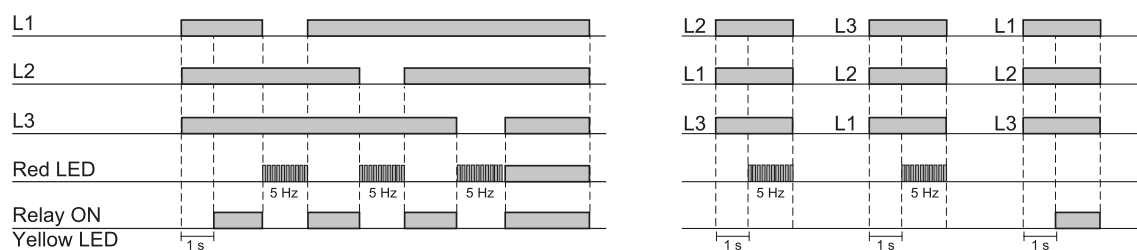

Total phase loss, phase sequence


Connection diagram

(*) NOTE: fuses F of 315 mA delayed, if required by local law.

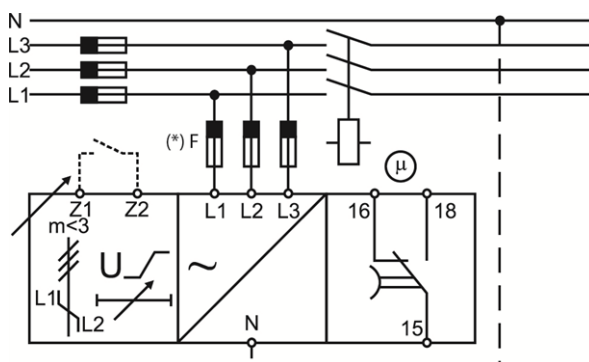

References

Further reading

| Information | Where to find it | QR code |
|---------------------|---|---|
| Installation manual | https://gavazziautomation.com/images/PIM/MANUALS/ENG/XPBX1-XPB01N_IM.pdf | |
| PSS selection tool | https://carlogavazzi-pss.com/ |  |



COPYRIGHT ©2024

Content subject to change. Download the PDF: www.gavazziautomation.com