

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** [0150140461](#)  
**Status:** **Active**  
**Overview:** [FFC Cable Jumpers, Premo-Flex Flat-Flexible Cable Jumpers](#)  
**Description:** 0.25mm Pitch Premo-Flex FFC Jumper, Same Side Contacts (Type A), 102.00mm Cable Length, Gold (Au) Plating, 61 Circuits

**Documents:**

|                                                            |                                                      |
|------------------------------------------------------------|------------------------------------------------------|
| <a href="#">Drawing (PDF)</a>                              | <a href="#">Datasheet (PDF)</a>                      |
| <a href="#">Product Specification 1501400001-000 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a> |

**General**

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Product Family          | Cable                                                                     |
| Series                  | <a href="#">15014</a>                                                     |
| Crimp Quality Equipment | Yes                                                                       |
| Overview                | <a href="#">FFC Cable Jumpers, Premo-Flex Flat-Flexible Cable Jumpers</a> |
| Product Name            | Premo-Flex FFC Jumper                                                     |
| UPC                     | 191130093526                                                              |

**Physical**

|                               |                 |
|-------------------------------|-----------------|
| Cable Length                  | 102.00mm        |
| Circuits (Loaded)             | 61              |
| Contact Layout Type           | A (same side)   |
| Material - Plating Mating     | Gold            |
| Net Weight                    | 1.000/g         |
| Packaging Type                | Bag             |
| Pitch - Mating Interface      | 0.25mm          |
| Temperature Range - Operating | -40° to +105°C  |
| Wire Size AWG                 | N/A             |
| Wire/Cable Type               | Flat Flex Cable |


**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 0.2A |
| Voltage - Maximum             | N/A  |

**Material Info**

**Reference - Drawing Numbers**

|                       |                |
|-----------------------|----------------|
| Product Specification | 1501400001-000 |
| Sales Drawing         | 150140001-000  |

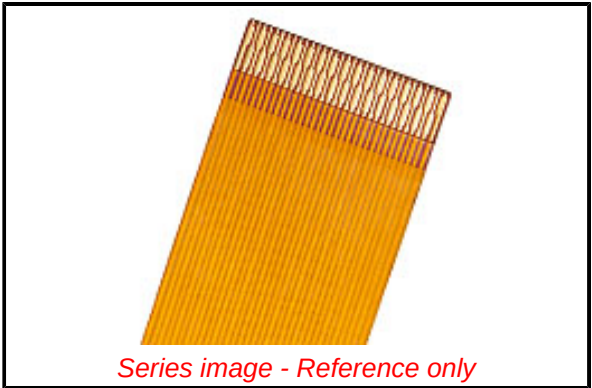

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[15014](#) Series

**Mates With**

Easy-On FFC/FPC Connector [5020786162](#)