# **HIGH PRESSURE CONNECTORS V SERIES**





# Precision modular connectors to suit your application


Since its creation in Switzerland in 1946 the LEMO Group has been recognized as a global leader of circular Push-Pull connectors and connector solutions. Today LEMO and its affiliated companies, REDEL and COELVER, are active in more than 80 countries with the help of over 40 subsidiaries and distributors.

### Over 75000 connectors

The modular design of the LEMO range provides over 75000 connectors from miniature Ø 3 mm to Ø 50 mm, capable of handling cable diameters up to 30 mm and for up to 114 contacts. This vast portfolio enables you to select the ideal connector configuration to suit almost any specific requirement in most markets, including medical devices, test and measurement instruments, machinery, audio video broadcast, telecommunications and military.

# **LEMO's Push-Pull Self-Latching Connection System** (not shown in this catalogue)

This self-latching system is renowned worldwide for its easy and quick mating and unmating features. It provides absolute security against vibration, shock or pull on the cable, and facilitates operation in a very limited space.



The LEMO self-latching system allows the connector to be mated by simply pushing the plug axially into the socket.

Once firmly latched, connection cannot be broken by pulling on the cable or any other component part other than the outer release sleeve.

When required, the connector is disengaged by a single axial pull on the outer release sleeve. This first disengages the latches and then withdraws the plug from the socket.

# UL Recognition 🔁

LEMO connectors are recognized by the Underwriters Laboratories (UL). The approval of the complete system (LEMO connector, cable and your equipment) will be easier because LEMO connectors are recognized.

# CE marking C€

CE marking ( € means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives. CE marking ( € applies to complete products or equipment, but not to electromechanical components, such as connectors.

### **RoHS**

LEMO connector specifications conforms the requirements of the RoHS directive (2011/65/EU) of the European Parliament and the latest amendments. This directive specifies the restrictions of the use of hazardous substances in electrical and electronic equipment marketed in Europe.

# Product safety notice & disclaimers

Please read and follow all instructions specified on the last page or on our <u>website</u> carefully and consult all relevent national and international safety regulations for your application. Improper handling, cable assembly, or wrong use of connectors can result in hazardous situations.

LEMO products and services are provided "as is." LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security.

In no event shall LEMO be liable for any direct, indirect, punitive, incidental, special consequential damages, to property or life, whatsoever arising out of or connected with the use or misuse of LEMO's products.




# **V** Series


V series connectors have been developed for utilisation where protection must be guaranteed under high pressures of liquids. The basic elements, insulators, contacts and clamping system are from the S and E series. The push-pull latching system has been replaced by a screw coupling system with watertightness maintained by compression of an O-ring in FPM (Viton®) according to the triangular shaped cavity principle. There are multiple application possibilities, from nuclear physics to the petroleum industry. After cable assembly the rear part must be covered with an adhesive heatshrink boot in order to ensure watertightness on the cable side. V series connectors provide the following main features:

- unipole and multipole type
- coaxial, triaxial or mixed type available upon request
- polarisation by stepped insert (half moon)
   360° screening for full EMC shielding
- rugged housing for extreme working conditions.

### Interconnections

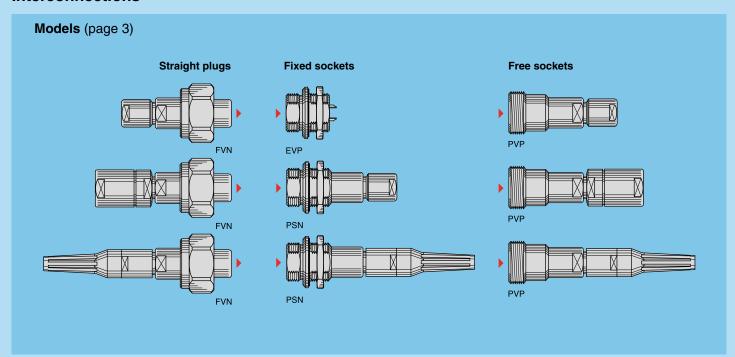


# Part Section Showing Internal Components (multipole)

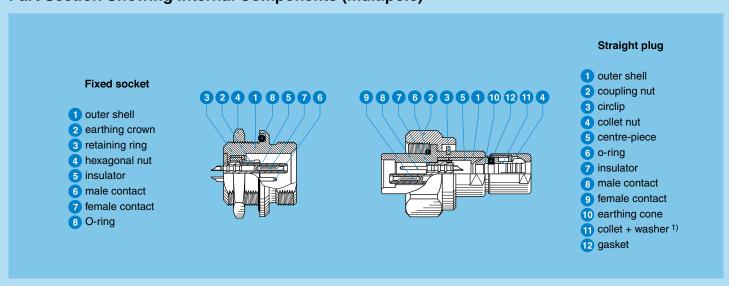


Note: 1) depending on models.




# Part Number Example

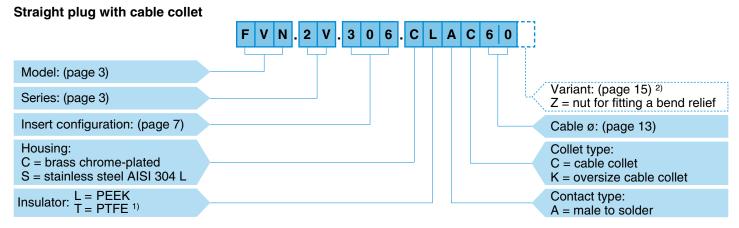

**FVN.2V.306.CLAC60** = straight plug with cable collet, 2V series, multipole type with 6 contacts, outer shell in chrome-plated brass, PEEK insulator, male solder contacts, C type collet for 6 mm diameter cable.

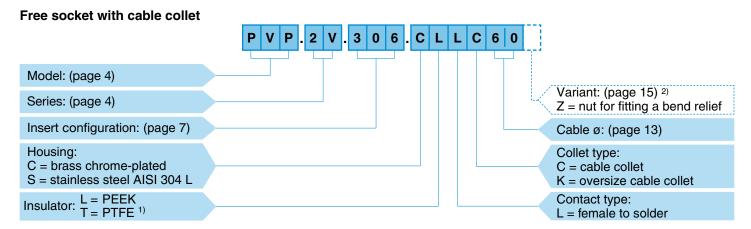

**PVP.2V.306.CLLC60** = free socket with cable collet, 2V series, multipole type with 6 contacts, outer shell in chrome-plated brass, PEEK insulator, female solder contacts, C type collet for 6 mm diameter cable.

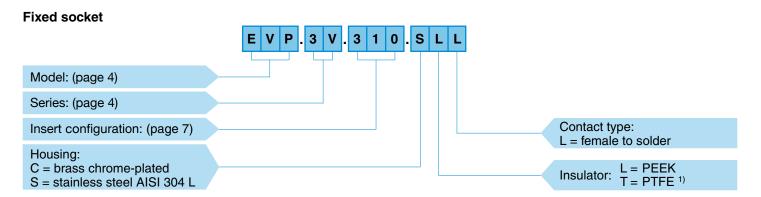

**EVP.3V.310.SLL** = fixed socket, nut fixing, 3V series, multipole type with 10 contacts, outer shell in stainless steel, PEEK insulator, female solder contacts.

Note: 1) PTFE insulator for unipole type only.

<sup>2</sup>) The «Variant» position in the reference is used to specify either the presence of a collet nut for fitting the bend relief. For models with collet nut for fitting the bend relief, a «Z» should be indicated and a bend relief can be ordered separately. An order for a connector with bend relief should thus include two part numbers.





# **Models**

# **Technical Characteristics**

# **Mechanical and Climatical**

Characteristics	Value	Standard				
Endurance	> 1000 cycles	IEC 60512-5 test 9a				
Temperature range	-20	° C, +200° C				
Salt spray corrosion test 2)	> 1000 h	IEC 60512-6 test 11f				
Protection index (mated)	> IP 68	IEC 60529				
Resistance to hydrostatic pressure (mated)	~ 30 bars 1)	IEC 60512-7 test 14d				
Climatical category	20/200/21	IEC 60068-1				

### **Electrical**

Characteri	stics	Value	Standard				
Shielding	at 10 MHz	> 95 dB	IEC 60169-1-3				
efficiency	at 1 GHz	> 80 dB	IEC 60169-1-3				


Note:

1) in order to perform correctly and withstand the pressure, cable assembly shall be made according to instruction we recommand. See page 18.

2) for chrome plated product («C» material code).

### **FVN** Straight plug with cable collet






Refe	rence		Dimensions (mm)										
Model	Series	Α	S2	S3									
FVN	0V	17.2	10	34.0	29	13.5	16	9	8				
FVN	1V	19.3	12	43.0	35	14.0	18	10	9				
FVN	2V	23.5	16	52.5	42	15.5	22	14	12				
FVN	3V	27.8	18	61.0	47	16.5	26	16	15				
FVN	4V	34.3	24	71.0	57	17.5	32	22	19				
FVN	5V	50.0	38	94.0	78	21.0	47	34	30				

### **FVN** Straight plug with oversize cable collet 1)






Refe	rence		Dimensions (mm)										
Model	Series	Α	В	L	М	N	S1	S2	S3	S4			
FVN	1V	19.3	14.5	55	47	14.0	18	10	12	12			
FVN	2V	23.5	17.0	65	55	15.5	22	14	15	15			
FVN	3V	27.8	22.0	80	66	16.5	26	16	19	19			
FVN	4V	34.3	36.0	105	91	17.5	32	22	30	32			

Note:  $^{1)}$  correspond to K type of collet, the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up (see page 13).

3




# FVN Straight plug, cable collet and nut for fitting a bend relief 1)



Refe	rence		Dimensions (mm)									
Model	Series	Α	A B L M N S1 S2 S3									
FVN	0V	17.2	10	34	29	13.5	16	9	7			
FVN	1V	19.3	12	43	35	14.0	18	10	9			
FVN	2V	23.5	16	52	42	15.5	22	14	12			
FVN	3V	27.8	18	60	47	16.5	26	16	15			
FVN	4V	34.3	24	71	57	17.5	32	22	19			

Note:  $^{1)}$  to order, add a "Z" at the end of the reference. The bend relief must be ordered separately (see pages 141 and 142 of the unipole/multipole catalog).

# **EVP** Fixed socket, nut fixing




ı	Refer	ence		Dimensions (mm)									
Мс	odel	Series	Α	В	е	Е	L	М	N	Р	S1	S4	
E	VP	0V	19	19.2	M14x1.0	5.5	19.0	2.0	8.0	8.0	12.5	17	
E	VP	1V	21	21.5	M16x1.0	10.5	26.0	2.0	8.0	13.5	14.5	19	
E	VP	2V	26	27.0	M20x1.0	11.0	29.0	2.5	9.0	15.0	18.5	24	
E	VP	3V	31	34.0	M24x1.0	15.0	34.5	3.0	9.5	20.0	22.5	30	
E	VP	4V	38	40.5	M30x1.0	14.5	35.0	3.5	10.0	21.5	28.5	36	
E	VP	5V	55	54.0	M45x1.5	15.5	44.5	4.5	12.5	24.5	42.5	-	

Panel cut-out (page 15)

Note: the 5V series is delivered with a round nut.

# PSN Fixed socket, cable collet, nut fixing



Refe	rence		Reference						Dimensions (mm)						
Model	Series	Α	A B e			L	М	N	S1	S3	S4				
PSN	0V	19	19.2	M14x1.0	5.5	34.0	2.0	8.0	12.5	8	17				
PSN	1V	21	21.5	M16x1.0	10.5	46.0	2.0	8.0	14.5	9	19				
PSN	2V	26	27.0	M20x1.0	11.0	54.0	2.5	9.0	18.5	12	24				
PSN	3V	31	34.0	M24x1.0	15.0	65.0	3.0	9.5	22.5	15	30				
PSN	4V	38	40.5	M30x1.0	14.5	75.5	3.5	10.0	28.5	19	36				
PSN	5V	56	54.0	M45x1.5	15.5	95.0	4.5	12.5	42.5	30	_				

Panel cut-out (page 15)


Note: the 5V series is delivered with a round nut.





# PSN Fixed socket, cable collet, nut fixing and nut for fitting a bend relief 1)






Refe	rence		Dimensions (mm)											
Model	Series	Α	в е		Е	E L I		N	S1	S3	S4			
PSN	0V	19	19.2	M14x1.0	5.5	34.0	2.0	8.0	12.5	7	17			
PSN	1V	21	21.5	M16x1.0	10.5	46.0	2.0	8.0	14.5	9	19			
PSN	2V	26	27.0	M20x1.0	11.0	54.0	2.5	9.0	18.5	12	24			
PSN	3V	31	34.0	M24x1.0	15.0	64.0	3.0	9.5	22.5	15	30			
PSN	4V	38	40.5	M30x1.0	14.5	75.5	3.5	10.0	28.5	19	36			

Panel cut-out (page 15)


Note:  $^{\rm 1)}$  to order, add a «Z» at the end of the reference. The bend relief must be ordered separately (see pages 141 and 142 of the unipole/multipole catalog).

# PVP Free socket with cable collet



Refe	rence	Dimensions (mm)									
Model	Series	В	е	L	S1	S2					
PVP	0V	10	M14x1.0	34.0	9	8					
PVP	1V	12	M16x1.0	45.0	10	9					
PVP	2V	16	M20x1.0	54.0	14	12					
PVP	3V	19	M24x1.0	65.0	16	15					
PVP	4V	24	M30x1.0	75.5	22	19					
PVP	5V	38	M45x1.5	95.0	34	30					

# PVP Free socket with oversize cable collet 1)



Refe	rence		Dime	ension	s (mm	1)	
Model	Series	В	е	L	S1	S2	S3
PVP	<b>1V</b>	14.5	M16x1.0	58	10	12	12
PVP	2V	17.0	M20x1.0	67	14	15	15
PVP	3V	22.0	M24x1.0	84	16	19	19
PVP	4V	36.0	M30x1.0	109	22	30	32


**Note:**  $^{1)}$  correspond to K type of collet, the fitting of oversize collets onto this model allows them to be fitted to the cables that can be accommodated by the next housing size up (see page 13).

5





# PVP Free socket, cable collet and nut for fitting a bend relief 1)




	Refer	rence		Dimens	ions (r	mm)	
N	Model	Series	В	е	L	S1	S2
	PVP	0V	10	M14x1.0	34.0	9	7
	PVP	1V	12	M16x1.0	46.0	10	9
	PVP	2V	16	M20x1.0	54.0	14	12
	PVP	3V	19	M24x1.0	64.0	16	15
	PVP	4V	24	M30x1.0	75.5	22	19

**Note:** <sup>1)</sup> to order, add a «Z» at the end of the reference. The bend relief must be ordered separately (see pages 141 and 142 of the unipole/multipole catalog).





# Unipole

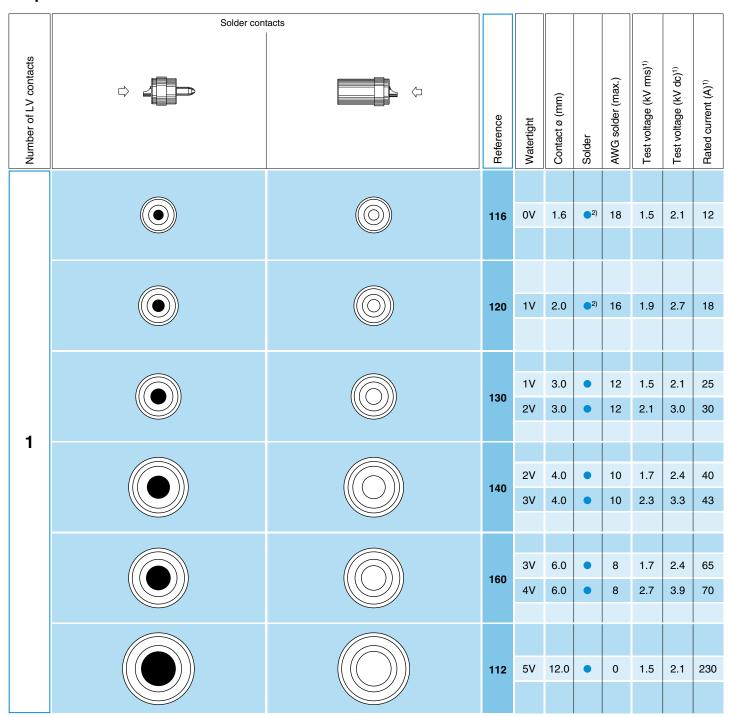

Note: 1) see calculation method, caution and suggested standard. 2) also available with inversed contacts: plug = female, socket = male.

• First choice alternative — Special order alternative

# Coaxial, Triaxial, Mixed

A wide choice of those types is available, please consult us.





	Solder o	contacts					Cor ty	itact pe			AWG														
contacts	$\Rightarrow$										Cri	mp	/ rms) <sup>1) 2)</sup>	/ dc) <sup>1)2)</sup>	A) <sup>1)</sup>										
f LV o	Crimp c	ontacts	0		(mm)			ght)	(w	ах.)			ge (K	ge (k	rent (										
Number of LV contacts	$\Rightarrow$	<b>(</b>	Reference	Watertight	Contact ø (mm)	Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	min.	max.	Test voltage (kV ms) <sup>1) 2)</sup>	Test voltage (kV dc) <sup>1)2)</sup>	Rated current (A) <sup>1)</sup>										
2				0V	0.9	•	•	•	•	22	32	20	1.1	1.6	10 <sup>3)</sup>										
				1V	1.3	•	•	•	•	20	26	18	1.2	1.8	15 <sup>3)</sup>										
	1	1	302	2V	1.6	•	0	0	0	18	22	14	1.7	2.4	204)										
	2	2	302	3V	2.0	•		0		16			3.0	4.2	23										
				4V	4.0	•		0		10			2.1	3.0	35										
				5V	6.0	•				8			3.7	5.2	50										
3				0V	0.7	•	0	•	•	26	32	22	1.0	1.5	73)										
					1V	0.9	•	0	•	•	22	32	20	1.2	1.8	10 <sup>3)</sup>									
	2 • 1			303	2V	1.3	•	0	•	0	20	26	18	1.5	2.1	15 <sup>4)</sup>									
	30			000	3V	2.0	•		0		16			1.5	2.1	20									
					4V	3.0	•		0		12			2.1	3.0	25									
				5V	1x6.0 2x4.0	•				8 10			3.7	5.2	50 35										
4				0V	0.7	•	•	•	•	26	32	22	1.0	1.5	7 3)										
_				1V	0.9	•	•	•	•	22	32	20	1.2	1.8	10 <sup>3)</sup>										
	2 • 1									1002	1002	1002	304	2V	1.3	•	0	•	•	20	26	18	1.7	2.4	15 <sup>4)</sup>
	30 04									4 • • 3		3 · · · · · · · · · · · · · · · · · · ·		3V	2.0	•		0		16			1.5	2.1	18
					4V	3.0	•		0		12			2.1	3.0	22									
				5V	4.0	•				10			3.7	5.2	35										
5			3					1V	2x0.9 3x0.7	•	0	•	•	22 26	32	20 22	1.5	2.1	10 <sup>3)</sup> 7 <sup>3)</sup>						
	3 • 2							2V	1.3	•	0	•	•	20	26	18	1.5	2.1	13 <sup>4)</sup>						
								3(10 3)	305	305	3V	2x2.0 3x1.3	•		0		16 20			1.5	2.1	18 14			
	5			4V	2x3.0 3x2.0	•		0		12 16			2.1	3.0	22 16										
				5V	2x4.0 3x3.0	•				10 12			3.0	4.2	35 25										

Note: 1) see calculation method, caution and suggested standard. 2) lowest measured value; contact to contact or contact to shell.
3) rated current = 6A for socket with elbow (90°) contacts for printed circuit. 4) rated current = 12A for socket with elbow (90°) contacts for printed circuit.

First choice alternative

O Special order alternative





9

# Multipole

	Solder o	contacts					Cor ty	itact pe			AWG				
Number of LV contacts	Crimp c	contacts			mm)			lht)	(^	x.)	Cri	mp	Test voltage (kV ms) <sup>1) 2)</sup>	Test voltage (kV dc) <sup>1)2)</sup>	ant (A) <sup>1)</sup>
Number of	$\Rightarrow$	<b>(</b>	Reference	Watertight	Contact ø (mm)	Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	min.	max.	Test voltage	Test voltag	Rated current (A) <sup>1)</sup>
6				1V	0.7	•	0	•	•	26	32	22	1.2	1.7	73)
	3 • 2	20 3		2V	1.3	•	<b>4</b> )	•	•	20	26	18	1.5	2.1	12
	(40 0 0)	$\left(\left(\begin{array}{cc} 1 \\ \bullet \\ \bullet \end{array}\right) - \left(\begin{array}{cc} \bullet \\ \bullet \end{array}\right)\right)$	306	3V	1.3	•		•		20			2.1	3.0	14
	50 6	<b>0 0 5</b>		4V	2.0	•		0		16			2.1	3.0	16
				5V	3.0	•				12			3.0	4.2	25
7															0)
	4 • ° ° °	<sup>2</sup> O <sup>3</sup> O 4		2V	3x1.3 4x0.9	•	0	•	•	20 22	26 32	18 20	0.8	1.2	12 <sup>3)</sup> 9 <sup>3)</sup>
	$\left( \begin{array}{c} \bullet \\ 5 \\ \bigcirc \end{array} \begin{array}{c} - \\ \odot \end{array} \begin{array}{c} \bullet \\ \end{array} \right)$	$\left( \begin{array}{c} \left( \begin{array}{c} 1 \\ \bullet \end{array} \right) \\ \bullet \end{array} \right)$	307	3V	1.3	•		•		20			1.0	1.5	12
	60 7			4V	3x2.0 4x1.3	•		0		16 20			2.1	3.0	16 13
8				2V	0.9	•	0	•		22	32	20	0.8	1.2	9 <sup>3)</sup>
	3 <b>●</b> 2	<sup>2</sup> O O <sup>3</sup>		3V	1.3	•		•		20			1.0	1.5	10
	(4 1 1 1 1 1 1 1 1 1 1	$\begin{pmatrix} \begin{pmatrix} 1 & O & - & O & 4 \\ 8 & & & 5 & 5 \end{pmatrix} \end{pmatrix}$	308	4V	1.3	•		0		20			2.7	3.9	13
	6 7	7 6		5V	3.0					12			2.1	3.0	22
9	4 🗖	30 A													
	$\begin{pmatrix} 5 & & & 2 \\ & & & & 2 \\ \hline & & & & & \\ \hline & 6 & & & & \\ \hline & & & & & \\ \end{pmatrix}$		309	4V	1.3	•		0		20			2.1	3.0	12
	70 0	9 • • 7													
10	<b>6</b> 3 <b>6</b> 2	60 30													
	$\begin{pmatrix} 4 & \bullet & \bullet \\ \bullet & -10 & \bullet & \bullet \\ \hline 5 & -10 & \bullet & \bullet \end{pmatrix}$		310	2V	0.9		0	•	•	22	32	20	8.0	1.2	7 <sup>3)</sup>
	60 70 8	8 0, 06		3V	1.3	•		•	•	20			1.0	1.5	9
10	4 • 3	030 ±													
	$\begin{bmatrix} 5 & & & 2 \\ & & & & \\ \hline & & & & - & - & - & - \\ & & & & & & \end{bmatrix}$	(10 o o o o o o o o o o o o o o o o o o o	310	4V	1.3	•		0		20			2.1	3.0	11
	70,00,10	10 g g 8		5V	2.0	•				16			2.1	3.0	18

**Note:** 1) see calculation method, caution and suggested standard. 2) lowest measured value; contact to contact or contact to shell. 3) rated current = 6A for socket with elbow (90°) contacts for printed circuit. 4) only for FFL model.

• First choice alternative

Special order alternative





	Solder	contacts					Cor	ntact							
							ty	ntact pe			AWG				
tacts													18)1)2)	()1)2)	
/ con	Crimp o	ontacts	-		(u						Cri	mp	kV m	kV dc	(A)
of LV			ce	<del>ب</del>	ø (mr			aight)	(woo	nax.)			age (	age (	urrent
Number of LV contacts	$\Rightarrow$		Reference	Watertight	Contact ø (mm)	Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	نے ا	×	Test voltage (kV ms) <sup>1) 2)</sup>	Test voltage (kV dc) <sup>1) 2)</sup>	Rated current (A) <sup>1)</sup>
Ž			Re	Wa	ပိ	တိ	Ş	P.	Ę	တိ	min.	max.	É	Ë	Ra
12															
		$\begin{pmatrix} 3 & - & - & - & - & \\ 7 & - & - & - & 1 & 0 \end{pmatrix}$	312	ЗV	0.9	•		•	•	22			1.5	2.1	8
		12													
10	_														
12	5 4 3 a 2	20 <sup>3</sup> 0 4 10 110 0													
	60 120 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	10 — 12 — 6 10 — 7	312	4V	1.3	•		0		20			2.1	3.0	9
12															
		0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	312	5V	2.0	•				16			2.1	3.0	18
			012		2.0									0.0	.0
13		0-0-0													
		(40-0-0-07) (80-0-011)	313	3V	0.9	•		•	0	22			1.5	2.1	8
	130012	13/													
14	30-0-01	10-0-03													
	$\begin{pmatrix} 7 & - & - & 4 \\ 10 & - & - & - & 8 \\ 14 & - & - & - & 12 \end{pmatrix}$	(40-0-0-7) (8	314	3V	0.9	•		•	•	22			1.5	2.1	7
14															
1-7		20 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	044	4V	1.0					20			2.1	2.0	0
	60 <sup>13</sup> 0 0 <sup>14</sup> 0	14 - 13 - 6	314	40	1.3	•		0		20			2.1	3.0	9
14	( ) ( ) ( ) ( ) ( ) ( )	(°0,0)													
	$\begin{pmatrix} \begin{bmatrix} 0 & & & & & & & & & & \\ 0 & & & & & & &$	10 10 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	314	5V	2X3.0 12X2.0	•				12 16			1.8	2.4	20 15
		2 0 0 0 0			IZAZ.U					10					.5

Note: 1) see calculation method, caution and suggested standard. 2) lowest measured value; contact to contact to shell.

Special order alternative





max. duits	Test voltage (kV dc) <sup>1) 2)</sup>	Rated current (A) <sup>1)</sup>
max.	est voltage (k	rrent
max.	est vo	」
		Rated
1	0 15	7
		7
1.	8 2.4	15
		6
2.	1 3.0	7
1.	8 2.4	18 11
2.	1 3.0	7
1.	8 2.4	11
2.	1 3.0	7
	1. 1. 2. 2. 3. 1. 3. 1. 3. 3. 1. 3. 3. 1. 3. 3. 3. 3. 3. 3. 3. 3. 3. 3. 3. 3. 3.	1.8 2.4 1.8 2.4 1.0 1.5 2.1 3.0 2.1 3.0 2.1 3.0

Note: 1) see calculation method, caution and suggested standard. 2) lowest measured value; contact to contact to shell.

• First choice alternative Special order alternative






	Solder o	contacts					Cor ty	ntact pe			AWG				
contacts		¢									Cri	mp	/ ms) <sup>1) 2)</sup>	/ dc) <sup>1) 2)</sup>	A) <sup>1)</sup>
JLV 0	Crimp o	ontacts	Φ		(mm)			ight)	(wc	ax.)			ge (k)	ge (k)	rent (
Number of LV contacts	→ □	<b>(</b>	Reference	Watertight	Contact ø (mm)	Solder	Crimp	Print (straight)	Print (elbow)	Solder (max.)	min.	max.	Test voltage (kV ms) <sup>1) 2)</sup>	Test voltage (kV dc) <sup>1) 2)</sup>	Rated current (A) <sup>1)</sup>
22		00000000000000000000000000000000000000													
			322	5V	2x3.0 20x1.6	•				12 18			1.8	2.4	16 9
24		10-00-00 T		4V	0.9	•		0		22			2.1	3.0	7
		(80-0-0-0-12) 1317- 1821	324	5V	1.6	•				18			2.7	3.9	9
	M 22	2 2													
30		10-02													
	(20000000) (200000000) (200000002)		330	5V	1.3	•				20			1.8	2.4	8
36		00000													
			336	5V	1.3	•				20			1.8	2.4	7
40		000000													
	© © © © © © © © © © © © © © © © © © ©	00000000000000000000000000000000000000	340	5V	1.3	•				20			1.2	1.8	7
44	<b></b>	(cocces)													
	(0	(0000000000000000000000000000000000000	344	5V	1.3	•				20			1.2	1.8	6
	QCCCCCQ														
48		0000 000000000000000000000000000000000													
	000000000 100000000	(30000000)	348	5V	1.3	•				20			1.2	1.8	6
	\$000000°	40-0-4													

Note: 1) see calculation method, caution and suggested standard. 2) lowest measured value; contact to contact to shell.

• First choice alternative Special order alternative





# C and K type collets

0V, 1V, 2V and 3V series





	Refe	rence	Colle	et ø	Cal	ole ø
	Туре	Code	ø A	ø B	max.	min.
OV	С	<b>10</b> <sup>1)</sup>	1.6	-	1.2	1.0
UV	С	<b>15</b> <sup>1)</sup>	1.6	-	1.5	1.3
	С	<b>20</b> <sup>1)</sup>	2.1	-	2.0	1.6
	С	25	3.1	-	2.5	2.1
	С	30	3.1	-	3.0	2.6
	С	35	4.2	4.2	3.5	3.1
	С	40	4.2	4.2	4.0	3.6
	С	45	5.2	5.2	4.5	4.1
	K	50	5.2	5.2	5.0	4.6
	K	55	6.2	6.2	5.5	5.1
	K	60	6.2	6.2	6.0	5.6
	K	65	7.2	6.7	6.5	6.1
41/	С	35	4.2	-	3.5	3.1
1V	С	40	4.2	-	4.0	3.6
	С	45	5.2	-	4.5	4.1
	С	50	5.2	-	5.0	4.6
	С	55	6.2	6.2	5.5	5.1
	С	60	6.2	6.2	6.0	5.6
	С	65	7.2	6.7	6.5	6.1
	K	70	7.2	-	7.0	6.6
	K	75	8.2	8.2	7.5	7.1
	K	80	8.2	8.2	8.0	7.6
	K	85	9.2	8.6	8.5	8.1

	Refe	rence	Colle	et ø	Cal	ole ø
	Туре	Code	ø A	ø B	max.	min.
2V	С	65	7.2	-	6.5	6.1
<b>2</b> V	С	70	7.2	-	7.0	6.6
	С	75	8.2	8.2	7.5	7.1
	С	80	8.2	8.2	8.0	7.6
	С	85	9.2	8.6	8.5	8.1
	K	90	9.2	_	9.0	8.6
	K	95	10.2	10.2	9.5	9.1
	K	10	10.2	10.2	10.0	9.6
	K	11	11.2	10.6	10.5	10.1
21/	С	65	7.2	-	6.5	6.1
3V	С	70	7.2	-	7.0	6.6
	С	75	8.2	-	7.5	7.1
	С	80	8.2	-	8.0	7.6
	С	85	9.2	_	8.5	8.1
	С	90	9.2	-	9.0	8.6
	С	95	10.2	10.2	9.5	9.1
	С	10	10.2	10.2	10.0	9.6
	С	11	11.2	10.6	10.5	10.1
	K	11	12.3	-	12.0	10.6
	K	12	13.8	13.8	12.8	12.1
	K	13	13.8	13.8	13.5	12.9
	K	14	15.3	15.3	14.0	13.6
	K	15	15.3	15.3	15.0	14.1

**Note:** All dimensions are in millimetres.


1) the inner diameter of the smallest bend relief available is 2.5 mm (in TPU) / 1.7 mm (in silicone).



**4V** 




# C and K type collets



	Refe	rence	Colle	et ø	Cal	ole ø
	Туре	Code	ø A	ø B	max.	min.
	С	50	6.3	_	5.0	4.8
	С	55	6.3	-	5.5	5.1
_	С	60	6.3	-	6.0	5.6
	С	65	7.3	-	6.5	6.1
	С	70	7.3	-	7.0	6.6
	С	75	8.3	-	7.5	7.1
	С	80	8.3	-	8.0	7.6
	С	85	9.3	-	8.5	8.1
	С	90	9.3	-	9.0	8.6
	С	95	10.8	-	9.5	9.1
	С	10	10.8	-	10.5	9.6
	С	11	12.3	-	12.0	10.6
	С	12	13.8	13.8	12.8	12.1
	С	13	13.8	13.8	13.5	12.9
	С	14	15.3	15.3	14.0	13.6
	С	15	15.3	15.3	15.0	14.1
	K	16	17.8	_	16.5	15.6
	K	17	17.8	-	17.5	16.6
	K	18	19.8	-	18.5	17.6
	K	19	19.8	-	19.5	18.6
	K	20	21.8	-	20.5	19.6
	K	21	21.8	-	21.5	20.6
	K	22	23.8	23.8	22.5	21.6
	K	23	23.8	23.8	23.5	22.6

Note: all dimensions are in millimetres.




	Refe	rence	Colle	et ø	Cal	ole ø
	Туре	Code	ø A	ø B	max.	min.
5V	С	14	15.8	-	14.5	13.6
ΟV	С	15	15.8	_	15.5	14.6
	С	16	17.8	_	16.5	15.6
	С	17	17.8	_	17.5	16.6
	С	18	19.8	_	18.5	17.6
	С	19	19.8	_	19.5	18.6
	С	20	21.8	_	20.5	19.6
	С	21	21.8	_	21.5	20.6
	С	22	23.8	23.8	22.5	21.6
	С	23	23.8	23.8	23.5	22.6




# **Variant**

# Bend relief for models with collet



	Dof	Co	llet
	Ref.	Туре	Code
OV	Z	С	35 to 45
0V		K	50
41/	z	С	35 to 65
1V		K	70 to 85
21/	-	С	65 to 85
2V	Z	K	90 to 10




	Ref.	Collet					
	Hei.	Туре	Code				
3V	z	С	65 to 10				
3 V		K	11 to 15				
4V	z	С	65 to 15				

**Note:** The bend relief must be ordered separately (see pages 141 and 142 of the unipole/multipole catalog). All dimensions are in millimetres.

# **Panel cut-outs**

# **Panel Cut-outs**

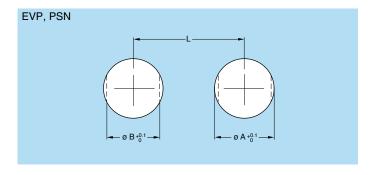

Series	Dime	nsions	(mm)
Series	Α	В	L
0V	14.1	12.6	19.0
1V	16.1	14.6	21.0
2V	20.2	18.6	25.5
3V	24.2	22.6	30.0
4V	30.2	28.6	37.0
5V	45.2	42.6	53.0

# Mounting nuts torque


Component			Torque	e (Nm)		
Component		1V	2V	3V	4V	5V
Collet nut for F●● and P●●	0.7	0.8	2	3	5	8
Mounting hex nut for sockets	5	7	9	12	17	22
Coupling nut	0.7	0.8	2	3	5	8

1N = 0.102 kg



# **Accessories**

Plug caps (IP68 and resistance to hydrostatic pressure 30 bars)




		Dimensions (mm)						
Part number	Series	Α	В	е	L	N <sup>1)</sup>	S1	
BFA.0V.100.●AZ	0V	17.2	6	M14x1.0	12.5	85	16	
BFA.1V.100.●AZ	1V	19.3	6	M16x1.0	15.5	85	18	
BFA.2V.100.●AZ	2V	23.5	6	M20x1.0	17.5	85	22	
BFA.3V.100.●AZ	3V	27.8	6	M24x1.0	22.0	120	26	
BFA.4V.100.●AZ	4V	34.3	10	M30x1.0	22.5	120	32	
BFA.5V.100.●AZ	5V	50.0	10	M45x1.5	27.0	120	47	

Note:  $^{1)}$  the tolerance on this dimension is  $\pm 5$  mm.

- Body material:  $\bullet = N$ , nickel-plated brass (Ni 3 $\mu$ m)  $\bullet = S$ , stainless steel
  - Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass

Blanking caps for fixed sockets (This cap is only IP68 when installed)






Part number	Series	Dimensions (mm)					
Fait Hullibei	Series	Α	L	N <sup>1)</sup>	S1		
BRE.0V.200.●AV	0V	17.2	13.7	85	16		
BRE.1V.200.●AV	1V	19.3	13.7	85	18		
BRE.2V.200.●AV	2V	23.5	14.7	85	22		
BRE.3V.200.●AV	3V	27.8	14.7	120	26		
BRE.4V.200.●AV	4V	34.3	14.7	120	32		
BRE.5V.200.●AV	5V	50.0	16.2	120	47		

**Note:** 1) the tolerance on this dimension is  $\pm$  5 mm.

- Body material:  $\bullet$  = N, nickel-plated brass (Ni 3 $\mu$ m)  $\bullet$  = S, stainless steel Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass O-ring: FPM (Viton®)

**BRF** Blanking caps for free sockets (This cap is only IP68 when installed)





Part number	Series	Dimensions (mm)					
		Α	L	N <sup>1)</sup>	S1		
BRF.0V.200.●AV	0V	17.2	13.7	85	16		
BRF.1V.200.●AV	1V	19.3	13.7	85	18		
BRF.2V.200.●AV	2V	23.5	14.7	85	22		
BRF.3V.200.●AV	3V	27.8	14.7	120	26		
BRF.4V.200.●AV	4V	34.3	14.7	120	32		
BRF.5V.200.●AV	5V	50.0	16.2	120	47		


**Note:** 1) the tolerance on this dimension is  $\pm 5$  mm.

- Body material: = N, nickel-plated brass (Ni 3μm)
- S, stainless steel

  Lanyard material: Stainless steel
- Crimp ferrule material: Nickel-plated brass O-ring: FPM (Viton®)



# **GEA** Hexagonal nuts

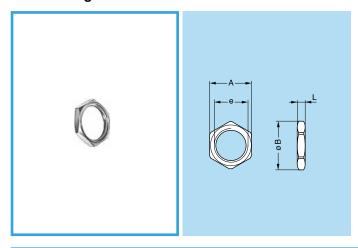

Part number	Series	Dimensions (mm)					
Part number	Series	Α	В	е	L		
GEA.0E.240.LN	0V	17	19.2	M14 x 1.00	2.5		
GEA.1E.240.LN	1V	19	21.5	M16 x 1.00	3.0		
GEA.2E.240.LN	2V	24	27.0	M20 x 1.00	4.0		
GEA.3E.240.LN	3V	30	34.0	M24 x 1.00	5.0		
GEA.4E.240.LN	4V	36	40.5	M30 x 1.00	7.0		


**Note:** to order this part separately, use the above part numbers. The last letters «LN» of the part number refer to the nut material and treatment. If a nut in stainless steel is desired, replace the last letters of the part number by «AZ».

- Material:

   Nickel-plated brass (3 μm)

   Stainless steel

### **GEB Round nuts**

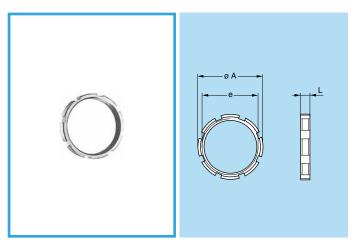


Part number	Series	Dimensions (mm)			
	Series	Α	е	L	
GEB.5E.240.LN	5V	54	M45 X 1.5	8.0	

**Note:** to order this part separately, use the above part numbers. The last letters «LN» of the part number refer to the nut material and treatment. If a nut in stainless steel is desired, replace the last letters of the part number by «AZ».

- Material:

   Nickel-plated brass (3 μm)
   Stainless steel

# **GDA** O-ring for plug

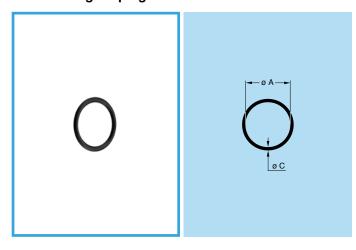

Part number	Series	Dim. (mm)		
		_ ^		
GDA.99.080.100VK	0V	8.0	1.0	
GDA.99.100.100VK	1V	10.0	1.0	
GDA.99.130.150VK	2V	13.0	1.5	
GDA.99.165.150VK	3V	16.5	1.5	
GDA.99.210.200VK	4V	21.0	2.0	
GDA.99.330.250VK	5V	33.0	2.5	

Material: FPM (Viton®)



# Cable assembly


# **Assembly instructions**

In order to ensure the sealing of plugs and sockets on the cable side, it is imperatively necessary to complete their assembly by realizing it with an adapted technique.

We recommend the fitting of an heatshrink boot with inner melting coating of type ATUM (manufactured by the RAYCHEM company) or similar.

This heatshrink boot is not provided with the connector.

For multiconductors cables, the assembly instructions are the followings:

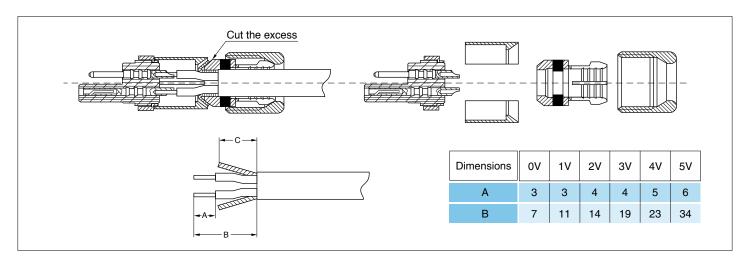

- 1) Preparation and stripping of cable (see above).
- 2) Slide the heatshrink boot over the cable; types and dimensions to have are:

Series	0V	1V	2V	3V	4V	5V
Type of heatshrink boot	12/3-0	12/3-0	19/6-0	19/6-0	24/6-0	40/13-0
Length of the boot	30	35	40	45	50	65
Oversize collet	-	16/4-0	19/6-0	24/8-0	40/13-0	-
Length of the boot for oversize collet	-	-	70	_	-	-

- 3) After having soldered the conductors on the contacts of the plug/socket insulator, bring the earthing cone against the centre-piece. Cut the excess of screen.
- 4) Locate the insulator, the centre-piece, the earthing cone, the gland, the compression ring and the collet in the plug/socket shell.
- 5) Screw the collet nut at the recommended torque value.
- 6) Remove all grease left on plug/socket shells with acetone.
- 7) Place the heatshrink boot of the correct dimensions onto the rear end of the plug/socket against the coupling nut.
- 8) Heat the heatshrink boot until the melting coating totally melts and adheres perfectly onto the cable jacket.



# **Product safety notice**

PLEASE READ AND FOLLOW ALL INSTUCTIONS CAREFULLY AND CONSULT ALL RELEVENT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION. IMPROPER HANDLING, CABLE ASSEMBLY, OR WRONG USE OF CONNECTORS CAN RESULT IN HAZARDOUS SITUATIONS.

### 1. SHOCK AND FIRE HAZARD

Incorrect wiring, the use of damaged components, presence of foreign objects (such as metal debris), and / or residue (such as cleaning fluids), can result in short circuits, overheating, and / or risk of electric shock. Mated components should never be disconnected while live as this may result in an exposed electric arc and local overheating, resulting in possible damage to components.

### 2. HANDLING

Connectors and their components should be visually inspected for damage prior to installation and assembly. Suspect components should be rejected or returned to the factory for verification.

Connector assembly and installation should only be carried out by properly trained personnel. Proper tools must be used

during installation and / or assembly in order to obtain safe and reliable performance.

### 3. USE

Connectors with exposed contacts should never be live (or on the current supply side of a circuit). Under general conditions voltages above 30 VAC and 42 VDC are considered hazardous and proper measures should be taken to eliminate all risk of transmission of such voltages to any exposed metal part of the connector.

### 4. TEST AND OPERATING VOLTAGES

The maximum admissible operating voltage depends upon the national or international standards in force for the application in question. Air and creepage distances impact the operating voltage; reference values are indicated in the catalog however these may be influenced by PC board design and / or wiring harnesses.

The test voltage indicated in the catalog is 75% of the mean breakdown voltage; the test is applied at 500 V/s and the test duration is 1 minute.

## 5. CE MARKING CE

CE marking (€ means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives.

CE marking ( applies to complete products or equipment, but not to electromechanical components, such as connectors.

### 6. PRODUCT IMPROVEMENTS

The LEMO Group reserves the right to modify and improve to our products or specifications without providing prior notification.

# MARNING (Prop 65 State of California)

Proposition 65 requires businesses to provide warnings to Californians about significant exposures to chemicals that cause cancer, birth defects or other reproductive harm. LEMO products are exempt from proposition 65 warnings because they are manufactured, marketed, and sold solely for commercial and industrial use. For further information, please visit https://www.lemo.com/quality/LEMO-Prop-65-compliance-declaration.pdf.

# **Disclaimers**

LEMO works constantly to improve the quality of its products; the information and illustrations figuring in this document may therefore vary and are not binding. In any case, LEMO makes no specific warranty of merchantability, fitness for a particular purpose, third party components as such or included in assembly, non-infringement, title, accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO component.


In no event shall LEMO, its affiliates, officers, agents or employees be liable for any incidental, indirect, special or consequential damages in connection with the products or services provided by LEMO, including (without limitation) loss of profits or revenues, interruption of business, loss of use of the products or any associated equipment, materials, components or products, damages to associated equipment or in combination with other components, materials.

Reproduction of significant portions of LEMO information in LEMO data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. LEMO is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

No reproduction or use without express permission of editorial or pictorial content, in any manner. LEMO SA reserves the right to modify and improve specifications, at all times, without any notification.



# **LEMO** complete product range

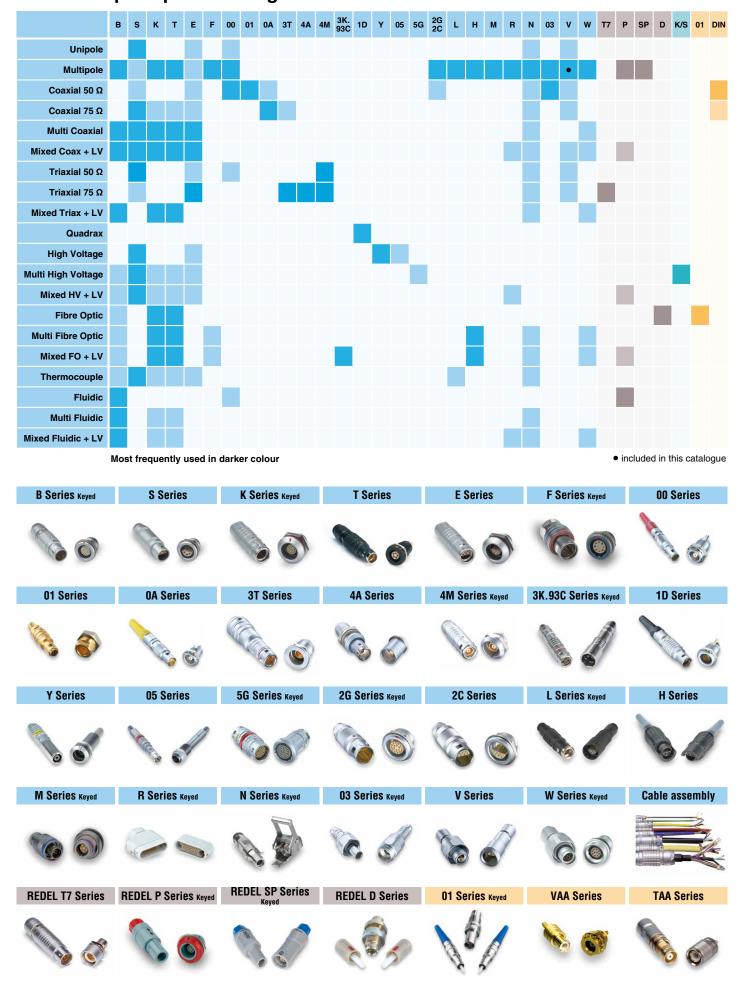

### LEMO HEADQUARTERS

SWITZERLAND LEMO SA Chemin des Champs-Courbes 28 - P.O. Box 194 - CH-1024 Ecublens Tel. +41 21 695 16 00 - e-mail: info@lemo.com

### LEMO SUBSIDIARIES

AUSTRIA LEMO Elektronik GesmbH Lemböckgasse 49/E6-3 1230 Wien Tel: +43 1 914 23 20 0 Fax:+43 1 914 23 20 11 salesAT@lemo.com

BRAZIL LEMO Latin America Ltda Av. Dr. Adhemar de Barros, 566 – Sala 1407, Vila Adyana CEP: 12245-011 São José dos Campos - SP - Brazil Tel: +55 11 94242 4293 info-la @lemo.com

CANADA LEMO Canada Inc 44 East Beaver Creek Road, unit 20 Richmond Hill, Ontario L4B 1G8 Tel: +1 905 889 56 78 Fax: +1 905 889 49 70 info-canada@lemo.com

CHINA / HONG KONG LEMO Electronics (Shanghai) Co., Ltd First Floor, Block E, 18 Jindian Road, Pudong Shanghai, China, 201206 Tel: +86 21 5899 7721 Fax: +86 21 5899 7727 cn.sales@lemo.com

DENMARK LEMO Denmark A/S Mandal Allé 16A 5500 Middelfart Tel: +45 45 20 44 00 Fax: +45 45 20 44 01 info-dk@lemo.com

FRANCE
LEMO France Sàrl
24/28 Avenue Graham Bell
Bâtiment Balthus 4
Bussy Saint Georges
77607 Marne la Vallée Cedex 3
Tel: +33 1 60 94 60 94
Fax: +33 1 60 94 60 90
info-fr@lemo.com

GERMANY LEMO Elektronik GmbH Hanns-Schwindt-Str. 6 81829 München Tel: +49 89 42 77 03 Fax: +49 89 420 21 92 info@lemo.de

HUNGARY REDEL Elektronika Kft Nagysándor József u. 6-12 1201 Budapest Tel: +36 1 421 47 10 Fax: +36 1 421 47 57 info-hu@lemo.com

ITALY LEMO Italia srl Viale Lunigiana 25 20125 Milano Tel: +39 02 66 71 10 46 Fax: +39 02 37 90 80 46 sales.it@lemo.com

JAPAN LEMO Japan Ltd 2-7-22, Mita, Minato-ku, Tokyo, 108-0073 Tel: +81 3 54 46 55 10 Fax: +81 3 54 46 55 11 info-jp@lemo.com

NETHERLANDS / BELGIUM LEMO Connectors Nederland B.V. Jacques Meuwissenweg 6 2031 AD Haarlem Tel. +31 23 206 07 01 info-nl@lemo.com

NORWAY / ICELAND LEMO Norway A/S Soerumsandvegen 69, 1920 Soerumsand Tel: +47 22 91 70 40 Fax: +47 22 91 70 41 info-no@lemo.com

SINGAPORE LEMO Asia Pte Ltd 4 Leng Kee Road, #06-09 SIS Building Singapore 159088 Tel: +65 6476 0672 Fax: +65 6474 0672 sg.sales@lemo.com

SPAIN / PORTUGAL IBERLEMO SAU Brasil, 45, 08402 Granollers Barcelona Tel: +34 93 860 44 20 Fax: +34 93 879 10 77 info-es@lemo.com

SWEDEN / FINLAND LEMO Nordic AB Gunnebogatan 30, Box 8201 163 08 Spånga Tel: +46 8 635 60 60 Fax: +46 8 635 60 61 info-se@lemo.com

SWITZERLAND LEMO Verkauf AG Grundstrasse 22 B, 6343 Rotkreuz Tel: +41 41 790 49 40 ch.sales@lemo.com

TAIWAN TAOYUAN TAIWAN Tel: +886 967 132 824 speng@lemo.com

UNITED ARAB EMIRATES
LEMO Middle East Connectors LLC
Concorde Tower 11th Floor,
Office 1102, Dubai Media City,
P.O. Box 449849
Dubai, United Arab Emirates
Tel: +971 4 568 1904
info-me@lemo.com

UNITED KINGDOM LEMO UK Ltd 12-20 North Street, Worthing, West Sussex, BN11 1DU Tel: +44 1903 23 45 43 lemouk@lemo.com

USA LEMO USA Inc P.O. Box 2408 Rohnert Park, CA 94927-2408 Tel: +1 707 578 88 11 +1 800 444 53 66 Fax: +1 707 578 08 69 info-US@lemo.com



### LEMO DISTRIBUTORS

ARGENTINA, AUSTRALIA, BRAZIL, CHILE, COLOMBIA, CZECH REPUBLIC, GREECE, INDIA, ISRAEL, NEW ZEALAND, PERU, POLAND, RUSSIA, SOUTH AFRICA, SOUTH KOREA, TURKEY, UKRAINE