


Features

- Extremely Low Parasitic Capacitance & Inductance
- Surface Mountable in Microwavable Circuits, No Wirebonds Required
- Rugged HMIC Construction with Polyimide Scratch Protection
- Reliable, Multilayer Metalization with a Diffusion Barrier, 100% Stabilization Bake (300°C, 16 hours)
- Lower Susceptibility to ESD Damage

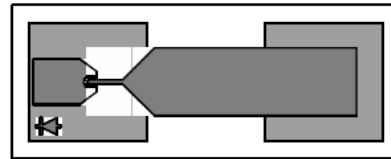

Description and Applications

The MA4E2502 Surmount™ Series diodes are silicon low, medium, and high barrier Schottky devices fabricated with the patented Heterolithic Microwave Integrated Circuit (HMIC) process. HMIC circuits consist of silicon pedestals which form diodes or via conductors embedded in a glass dielectric, which acts as the low dispersion, microstrip transmission medium. The combination of silicon and glass allows HMIC devices to have excellent loss and power dissipation characteristics in a low profile, reliable device.

The Surmount™ Schottky devices are excellent choices for circuits requiring the small parasitics of a beam lead device coupled with the superior mechanical performance of a chip. The Surmount™ structure employs very low resistance silicon vias to connect the Schottky contacts to the metalized mounting pads on the bottom surface of the chip. These devices are reliable, repeatable, and a lower cost performance solution to conventional devices. They have lower susceptibility to electrostatic discharge than conventional beam lead Schottky diodes.

The multilayer metallization employed in the fabrication of the Surmount™ Schottky junctions includes a platinum diffusion barrier, which permits all devices to be subjected to a 16-hour non-operating stabilization bake at 300°C.

The “0502” outline allows for surface mount placement and multi-functional polarity orientations.

The MA4E2502 series of Surmount™ Schottky diodes are recommended for use in microwave circuits through Ku band frequencies for lower power applications such as mixers, sub-harmonic mixers, detectors, and limiters. The HMIC construction facilitates the direct replacement of more fragile beam lead diodes with the corresponding Surmount™ diode, which can be connected to a hard or soft substrate circuit with solder.

Ordering Information

| Part Number ¹ | Package |
|--------------------------|-----------------------------|
| MA4E2502x-1246W | wafer on frame ² |
| MA4E2502x-1246 | 100 piece Die in carrier |
| MADS-002502-1246xP | 3000 piece reel |

1. Replace x with L for low barrier, M for medium barrier or H for high barrier.
2. Call factory for standard quantities for full wafers on frames.

1

SURMOUNT™ Low, Medium, and High Barrier Silicon Schottky Diodes

Rev. V3

Electrical Specifications: Recommended Freq. = DC - 18 GHz, @ +25°C

| Model Number | Type | V _F @ 1 mA (mV) | V _B @ 10 μA (V) | C _T @ 0 V (pF) | R _T Slope Resistance ³ (V _{F1} - V _{F2})/(10.5 - 9.5 mA) (Ω) |
|--------------|----------------|----------------------------|----------------------------|---------------------------|-------------------------------------------------------------------------------------------------------|
| MA4E2502L | Low Barrier | 330 max. 300 typ. | 3 min. 5 typ. | 0.12 max. 0.10 typ. | 16 typ. 20 max. |
| MA4E2502M | Medium Barrier | 470 max. 420 typ. | 3 min. 5 typ. | 0.12 max. 0.10 typ. | 12 typ. 18 max. |
| MA4E2502H | High Barrier | 700 max. 650 typ. | 3 min. 5 typ. | 0.12 max. 0.10 typ. | 11 typ. 15 max. |

3. R_T is the dynamic slope resistance where R_T = R_S + R_J, where R_J = 26 / I_{dc} (I_{dc} is in mA)


Absolute Maximum Ratings @ +25°C

| Parameter | Absolute Maximum |
|----------------------------------------------|--------------------------------|
| Forward Current | 20 mA |
| Reverse Voltage | 5 V |
| RF C.W. Incident Power | 20 dBm |
| RF & DC Dissipated Power | 50 mW |
| Junction Temperature | +175°C |
| Operating Temperature | -40°C to +125°C |
| Storage Temperature | -65°C to +150°C |
| Electrostatic Discharge (ESD) Classification | Class 0 HBM (Human Body Model) |


Typical Performance Curves

The MA4E2502L-1246 chip was evaluated in a detector circuit in which the Schottky diode terminates a 50 Ω transmission line on a duroid substrate. The chip was attached to the terminal of a 3.5 mm connector and the output voltage was measured through a bias tee on a voltmeter. Matching was not attempted.

Output Voltage vs. Frequency

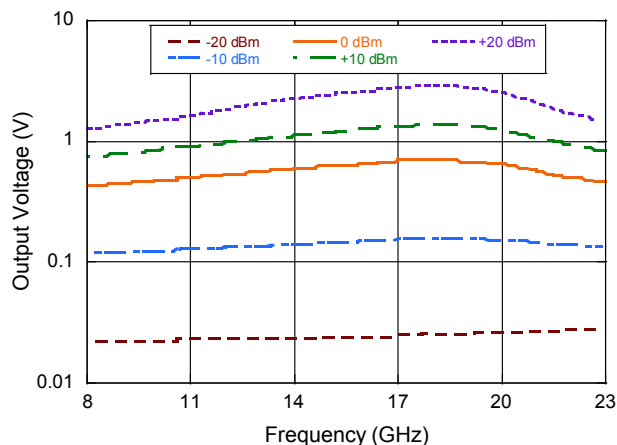

Output Voltage vs. Input Power

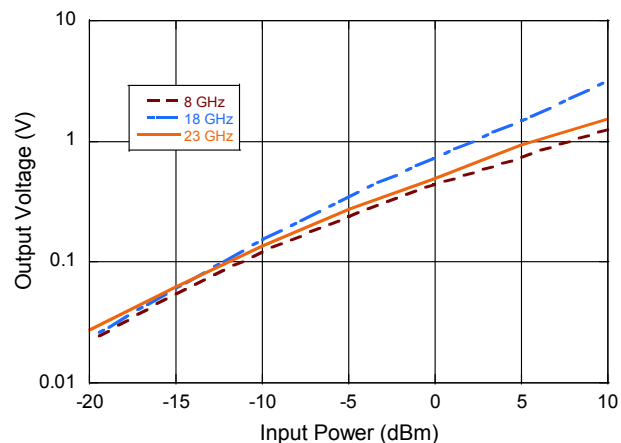


2

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

For further information and support please visit:
<https://www.macom.com/support>

DC-0007659

MA4E2502 Diode Schematic

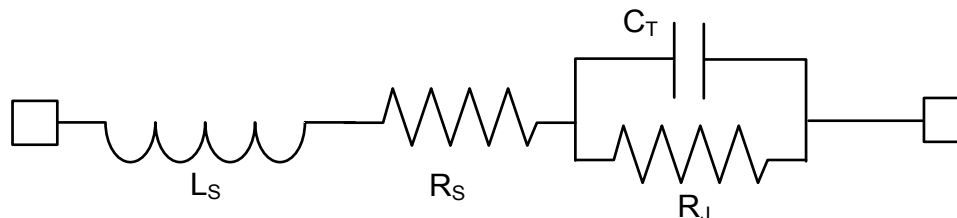

Schematic Values

| Model Number | L_s (nH) | R_s (Ω) | R_j (Ω) | C_t (pF) |
|--------------|------------|--------------------|---------------------------|------------|
| MA4E2502L | 0.45 | 12.8 | 26 / I _{dc} (mA) | 0.10 |
| MA4E2502M | 0.45 | 9.6 | 26 / I _{dc} (mA) | 0.10 |
| MA4E2502H | 0.45 | 6.5 | 26 / I _{dc} (mA) | 0.10 |

Handling

All semiconductor chips should be handled with care to avoid damage or contamination from perspiration and skin oils. The use of plastic tipped tweezers or vacuum pickups is strongly recommended for individual components. The top surface of the die has a protective polyimide coating to minimize damage.

The rugged construction of these Surmount™ devices allows the use of standard handling and die attach techniques. It is important to note that industry standard electrostatic discharge (ESD) control is required at all times, due to the sensitive nature of Schottky junctions.

Bulk handling should insure that abrasion and mechanical shock are minimized.

Die Bonding

Die attach for these devices is made simple through the use of surface mount die attach technology. Mounting pads are conveniently located on the bottom surface of these devices, and are opposite the active junction. The devices are well suited for high temperature solder attachment onto hard substrates. 80Au/20Sn and Sn63/Pb37 solders are acceptable for usage. Die attach with electrically conductive silver epoxy is not recommended.

For hard substrates, we recommend utilizing a vacuum tip and force of 60 to 100 grams applied uniformly to the top surface of the device, using a hot gas bonder with equal heat applied across the bottom mounting pads of the device. When soldering to soft substrates, it is recommended to use a lead-tin interface at the circuit board mounting pads. Position the die so that its mounting pads are aligned with the circuit board mounting pads. Reflow the solder paste by applying equal heat to the circuit at both die-mounting pads. The solder joint must not be made one at a time, creating un-equal heat flow and thermal stress. Solder reflow should not be performed by causing heat to flow through the top surface of the die. Since the HMIC glass is transparent, the edges of the mounting pads can be visually inspected through the die after die attach is completed.

MA4E2502L Low Barrier SPICE PARAMETERS

| Is (nA) | Rs (Ω) | N | Cj0 (pF) | M | Ik (mA) | Cjpar (pF) | Vj (V) | FC | BV (V) | IBV (mA) |
|---------|--------|------|----------|-----|---------|------------|---------|-----|--------|----------|
| 26 | 12.8 | 1.20 | 1.0 E-2 | 0.5 | 14 | 9.0 E-2 | 8.0 E-2 | 0.5 | 5.0 | 1.0 E-2 |


MA4E2502M Medium Barrier SPICE PARAMETERS

| Is (nA) | Rs (Ω) | N | Cj0 (pF) | M | Ik (mA) | Cjpar (pF) | Vj (V) | FC | BV (V) | IBV (mA) |
|---------|--------|------|----------|-----|---------|------------|---------|-----|--------|----------|
| 5 E-1 | 9.6 | 1.20 | 1.0 E-02 | 0.5 | 10 | 9.0 E-2 | 8.0 E-2 | 0.5 | 5.0 | 1.0 E-2 |


MA4E2502H High Barrier SPICE PARAMETERS

| Is (nA) | Rs (Ω) | N | Cj0 (pF) | M | Ik (mA) | Cjpar (pF) | Vj (V) | FC | BV (V) | IBV (mA) |
|---------|--------|------|----------|-----|---------|------------|---------|-----|--------|----------|
| 5.7 E-2 | 6.5 | 1.20 | 1.0 E-02 | 0.5 | 4 | 9.0 E-2 | 8.0 E-2 | 0.5 | 5.0 | 1.0 E-2 |

Circuit Mounting Dimensions (Inches)

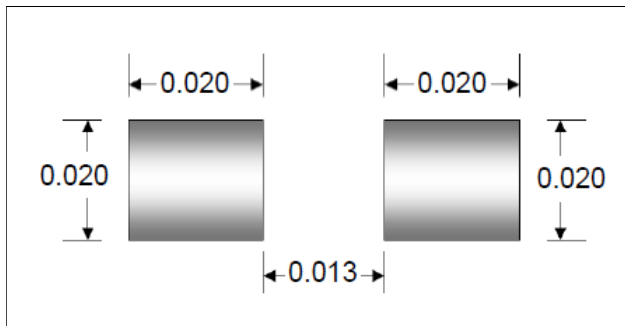

Case Style 1246

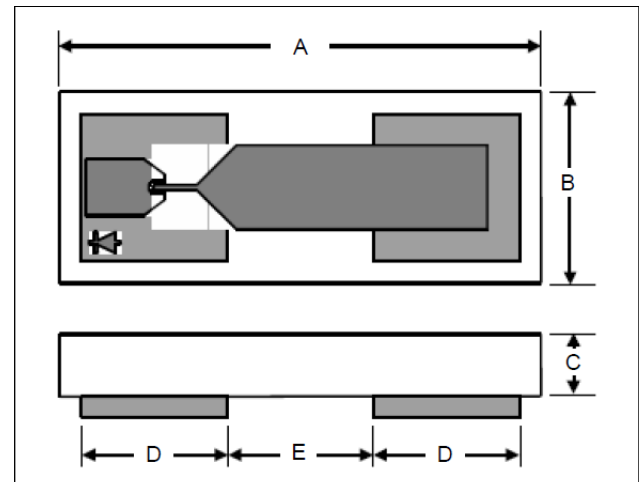

| Dim. | Inches | | Millimeters | |
|-------|--------|--------|-------------|-------|
| | Min. | Max. | Min. | Max. |
| A | 0.0445 | 0.0465 | 1.130 | 1.180 |
| B | 0.0169 | 0.0189 | 0.430 | 0.480 |
| C | 0.0040 | 0.0080 | 0.102 | 0.203 |
| D Sq. | 0.0128 | 0.0148 | 0.325 | 0.375 |
| E | 0.0128 | 0.0148 | 0.325 | 0.375 |

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.