NCV8772

LDO Regulator - Ultra Low I_q, Enable, Reset

350 mA

The NCV8772 is 350 mA LDO regulator with integrated reset functions dedicated for microprocessor applications. Its robustness allows NCV8772 to be used in severe automotive environments. Ultra low quiescent current as low as 24 μA typical makes it suitable for applications permanently connected to battery requiring ultra low quiescent current with or without load. This feature is especially critical when modules remain in active mode when ignition is off. The Enable function can be used for further decrease of quiescent current in shutdown mode to 1 μA. The NCV8772 contains protection functions as current limit, thermal shutdown and reverse output current protection.

Features

- Output Voltage Options: 3.3 V and 5 V
- Output Voltage Accuracy: ±1.5% (T_J = 25°C to 125°C)
- Output Current up to 350 mA
- Ultra Low Quiescent Current: typ 24 μA (max 30 μA)
- Very Wide Range of C_{out} and ESR Values for Stability
- Enable Function
  - 1 μA Max Quiescent Current when disabled
- Microprocessor Compatible Control Functions:
  - Reset with Adjustable Power−On Delay
- Wide Input Voltage Operation Range: up to 40 V
- Protection Features
  - Current Limitation
  - Thermal Shutdown
  - Reverse Output Current Protection
- These are Pb−Free Devices

Typical Applications

- Body Control Module
- Instruments and Clusters
- Occupant Protection and Comfort
- Powertrain


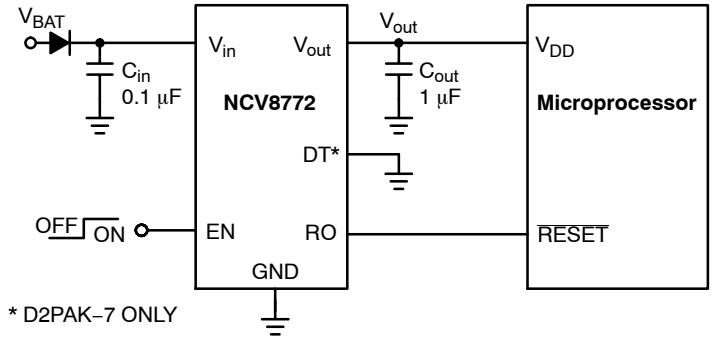


Figure 1. Typical Application Schematic


ON Semiconductor®


http://onsemi.com

MARKING DIAGRAMS





DPAK−5
DT SUFFIX
CASE 175AA






D²PAK−5
D5S SUFFIX
CASE 936A





D²PAK−7
D7S SUFFIX
CASE 936AB




y	= Timing and Reset Threshold Option
x, xx	= Voltage Option
A	= Assembly Location
WL, L	= Wafer Lot
Y	= Year
WW	= Work Week
G	= Pb−Free Package

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 14 of this data sheet.


© Semiconductor Components Industries, LLC, 2011

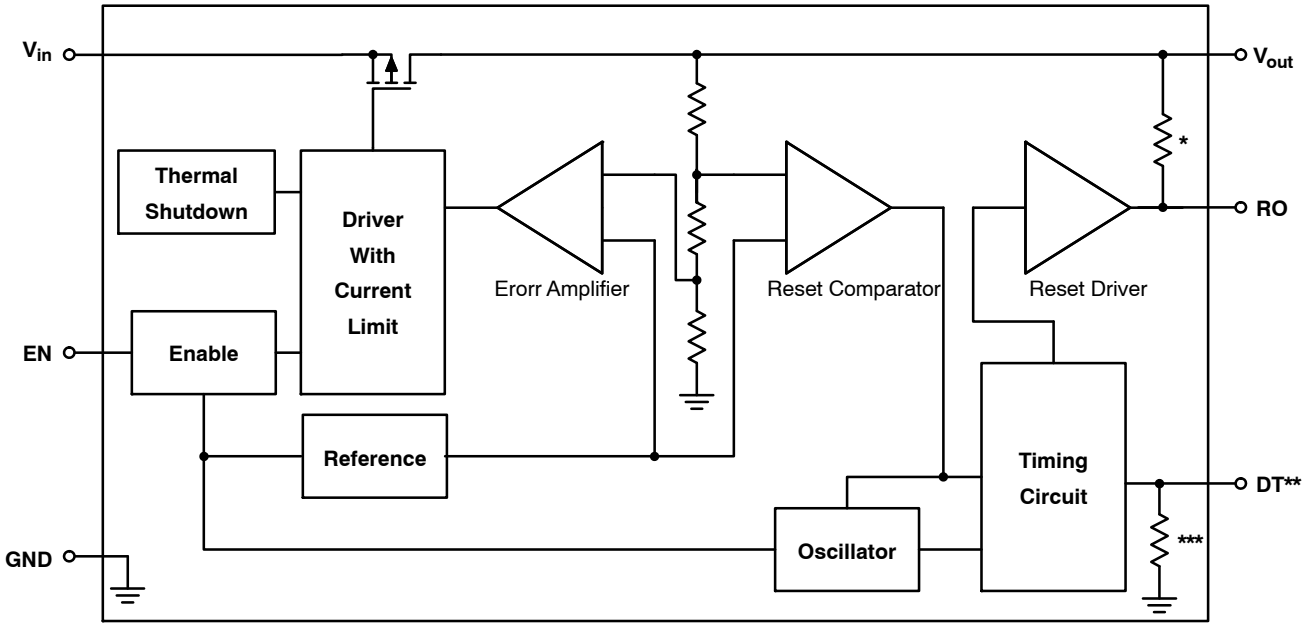

* 5 V OPTION ONLY
** D2PAK−7 ONLY
*** Pull−Down Resistor (typ 150 kΩ) active only in Reset State

Figure 2. Simplified Block Diagram

PIN CONNECTIONS

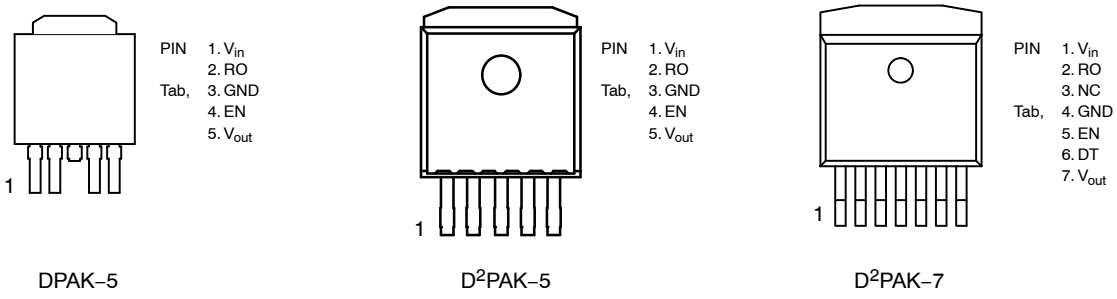

DPAK−5 D^2PAK−5 D^2PAK−7

Figure 3. Pin Connections

PIN FUNCTION DESCRIPTION

Pin No. DPAK−5 D2PAK−5	Pin No. D2PAK−7	Pin Name	Description
1	1	V_{in}	Positive Power Supply Input. Connect 0.1 μF capacitor to ground.
2	2	RO	Reset Output. 30 kΩ internal Pull−up resistor connected to V_{out}. RO goes Low when V_{out} drops by more than 7% (typ) from its nominal value (for NCV8772y devices with y = 1,2,3,...) or more than 10% (typ) from its nominal value (for NCV8772y devices with y = A, B, C,...).
−	3	NC	Not Connected
3, TAB	4, TAB	GND	Power Supply Ground.
4	5	EN	Enable Input. Low level disables the IC.
−	6	DT	Reset Delay Time Select. Short to GND or connected to V_{out} to select time.
5	7	V_{out}	Regulated Output Voltage. Connect 1 μF capacitor with ESR < 100 Ω to ground.

ABSOLUTE MAXIMUM RATINGS

Rating	Symbol	Min	Max	Unit
Input Voltage (Note 1) DC Transient, t < 100 ms	V_{in}	−0.3 –	40 45	V
Input Current	I_{in}	−5	–	mA
Output Voltage (Note 2)	V_{out}	−0.3	5.5	V
Output Current	I_{out}	−3	Current Limited	mA
Enable Input Voltage DC Transient, t < 100 ms	V_{EN}	−0.3 –	40 45	V
Enable Input Current	I_{EN}	−1	1	mA
DT (Reset Delay Time Select) Voltage	V_{DT}	−0.3	5.5	V
DT (Reset Delay Time Select) Current	I_{DT}	−1	1	mA
Reset Output Voltage	V_{RO}	−0.3	5.5	V
Reset Output Current	I_{RO}	−3	3	mA
Junction Temperature	T_J	−40	150	°C
Storage Temperature	T_{STG}	−55	150	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
2. 5.5 V or (V_{in} + 0.3 V) (whichever is lower).

ESD CAPABILITY (Note 3)

Rating	Symbol	Min	Max	Unit
ESD Capability, Human Body Model	ESD_{HBM}	−2	2	kV
ESD Capability, Machine Model	ESD_{MM}	−200	200	V
ESD Capability, Charged Device Model	ESD_{CDM}	−1	1	kV

3. This device series incorporates ESD protection and is tested by the following methods:
   ESD Human Body Model tested per AEC−Q100−002 (JS−001−2010)
   ESD Machine Model tested per AEC−Q100−003 (EIA/JESD22−A115)
   ESD Charge Device Model tested per AEC−Q100−011 (EIA/JESD22−C101)

LEAD SOLDERING TEMPERATURE AND MSL (Note 4)

Rating	Symbol	Min	Max	Unit
Moisture Sensitivity Level DPAK−5 D2PAK−5 D2PAK−7	MSL	1 1 3		–
Lead Temperature Soldering Reflow (SMD Styles Only), Pb−Free Versions	T_{SLD}	–	265 peak	°C

4. For more information, please refer to our Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

THERMAL CHARACTERISTICS (Note 5)

Rating	Symbol	Value	Unit
Thermal Characteristics, DPAK−5 Thermal Resistance, Junction−to−Air (Note 6) Thermal Reference, Junction−to−Case (Note 6)	 $R_{\theta JA}$ $R_{\Psi JC}$	 56 8.4	°C/W
Thermal Characteristics, D2PAK−5 Thermal Resistance, Junction−to−Air (Note 6) Thermal Reference, Junction−to−Case (Note 6)	 $R_{\theta JA}$ $R_{\Psi JC}$	 53 8.4	°C/W
Thermal Characteristics, D2PAK−7 Thermal Resistance, Junction−to−Air (Note 6) Thermal Reference, Junction−to−Case (Note 6)	 $R_{\theta JA}$ $R_{\Psi JC}$	 51 8.4	°C/W

5. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
6. Values based on copper area of 645 mm^2 (or 1 in^2) of 1 oz copper thickness and FR4 PCB substrate.

RECOMMENDED OPERATING RANGE (Note 7)

Rating	Symbol	Min	Max	Unit
Input Voltage (Note 8)	V_{in}	4.5	40	V
Junction Temperature	T_J	−40	150	°C

7. Refer to ELECTRICAL CHARACTERISTICS and APPLICATION INFORMATION for Safe Operating Area.
8. Minimum V_{in} = 4.5 V or (V_{out} + V_{DO}), whichever is higher.

ELECTRICAL CHARACTERISTICS V_{in} = 13.2 V, V_{EN} = 3 V, C_{in} = 0.1 μF, C_{out} = 1 μF, for typical values T_J = 25°C, for min/max values T_J = −40°C to 150°C; unless otherwise noted. (Notes 9 and 10)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
REGULATOR OUTPUT						
Output Voltage (Accuracy %) 3.3 V 5.0 V	T_J = 25 °C to 125 °C V_{in} = 4.5 V to 16 V, I_{out} = 0.1 mA to 200 mA V_{in} = 5.575 V to 16 V, I_{out} = 0.1 mA to 200 mA	V_{out}	 3.2505 4.925 (−1.5 %)	 3.3 5.0	 3.3495 5.075 (+1.5%)	V
Output Voltage (Accuracy %) 3.3 V 5.0 V	 V_{in} = 4.5 V to 40 V, I_{out} = 0.1 mA to 200 mA V_{in} = 4.5 V to 16 V, I_{out} = 0.1 mA to 350 mA V_{in} = 5.6 V to 40 V, I_{out} = 0.1 mA to 200 mA V_{in} = 5.975 V to 16 V, I_{out} = 0.1 mA to 350 mA	V_{out}	 3.234 3.234 4.9 4.9 (−2 %)	 3.3 3.3 5.0 5.0	 3.366 3.366 5.1 5.1 (+2%)	V
Output Voltage (Accuracy %) 3.3 V 5.0 V	T_J = −40°C to 125°C V_{in} = 4.5 V to 28 V, I_{out} = 0 mA to 350 mA V_{in} = 5.975 V to 28 V, I_{out} = 0 mA to 350 mA	V_{out}	 3.234 4.9 (−2 %)	 3.3 5.0	 3.366 5.1 (+2%)	V
Line Regulation 3.3 V 5.0 V	 V_{in} = 4.5 V to 28 V, I_{out} = 5 mA V_{in} = 6 V to 28 V, I_{out} = 5 mA	Reg_{line}	−20	0	20	mV
Load Regulation	I_{out} = 0.1 mA to 350 mA	Reg_{load}	−35	10	35	mV
Dropout Voltage (Note 11) 5.0 V	 I_{out} = 200 mA I_{out} = 350 mA	V_{DO}	 – –	 250 440	 500 875	mV
Output Capacitor for Stability (Note 12)	I_{out} = 0 mA to 350 mA	 C_{out} ESR	 1 0.01	 – –	 100 100	 μF Ω
DISABLE AND QUIESCENT CURRENTS						
Disable Current	V_{EN} = 0 V, T_J < 85°C	I_{DIS}	–	–	1	μA
Quiescent Current (I_q = I_{in} − I_{out})	 I_{out} = 0.1 mA, T_J = 25°C I_{out} = 0.1 mA to 350 mA, T_J ≤ 125°C	I_q	 – –	 24 –	 29 30	μA
CURRENT LIMIT PROTECTION						
Current Limit	V_{out} = 0.96 x V_{out_nom}	I_{LIM}	400	–	1100	mA
Short Circuit Current Limit	V_{out} = 0 V	I_{SC}	400	–	1100	mA
REVERSE OUTPUT CURRENT PROTECTION						
Reverse Output Current Protection	V_{EN} = 0 V, I_{out} = −1 mA	V_{out_rev}	–	2	5.5	V
PSRR						
Power Supply Ripple Rejection (Note 12)	f = 100 Hz, 0.5 V_{pp}	PSRR	–	60	–	dB

9. Refer to ABSOLUTE MAXIMUM RATINGS and APPLICATION INFORMATION for Safe Operating Area.
10. Performance guaranteed over the indicated operating temperature range by design and/or characterization tested at $T_A \approx T_J$. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.
11. Measured when output voltage falls 100 mV below the regulated voltage at V_{in} = 13.2 V.
12. Values based on design and/or characterization.
13. See APPLICATION INFORMATION section for Reset Thresholds and Reset Delay Time Options

ELECTRICAL CHARACTERISTICS V_{in} = 13.2 V, V_{EN} = 3 V, C_{in} = 0.1 μF, C_{out} = 1 μF, for typical values T_J = 25°C, for min/max values T_J = −40°C to 150°C; unless otherwise noted. (Notes 9 and 10)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
ENABLE THRESHOLDS						
Enable Input Threshold Voltage Logic Low Logic High		$V_{th(EN)}$	 – 2.5	 – –	 0.8 –	V
Enable Input Current Logic High Logic Low	 V_{EN} = 5 V V_{EN} = 0 V, T_J < 85°C	 I_{EN_ON} I_{EN_OFF}	 – –	 3 0.5	 5 1	μA
DT (RESET DELAY TIME SELECT) – D2PAK−7 ONLY						
DT Threshold Voltage Logic Low Logic High		$V_{th(DT)}$	 – 2.0	 – –	 0.8 –	V
DT Input Current	V_{DT} = 5 V	I_{DT}	–	–	1.0	μA
RESET OUTPUT RO						
Input Voltage Reset Threshold 3.3 V	V_{in} decreasing, V_{out} > V_{RT}	V_{in_RT}	 –	 3.8	 4.2	V
Output Voltage Reset Threshold (Note 13) (NCV8772y) where y = 1,2,3,... 3.3 V 5.0 V (NCV8772y) where y = A,B,C,... 3.3 V 5.0 V	V_{out} decreasing V_{in} > 4.5 V V_{in} > 5.5 V V_{in} > 4.5 V V_{in} > 5.5 V	V_{RT}	 90 90 87 87	 93 93 90 90	 96 96 93 93	%V_{out}
Reset Hysteresis		V_{RH}	–	2.0	–	%V_{out}
Maximum Reset Sink Current 3.3 V 5.0 V	V_{out} = 3 V, V_{RO} = 0.25 V V_{out} = 4.5 V, V_{RO} = 0.25 V	I_{ROmax}	1.3 1.75	– –	– –	mA
Reset Output Low Voltage	V_{out} > 1 V, I_{RO} < 200 μA	V_{ROL}	–	0.15	0.25	V
Reset Output High Voltage 5.0 V		V_{ROH}	4.5	–	–	V
Reset High Level Leakage Current 3.3 V		I_{ROLK}	 –	 –	 1.0	μA
Integrated Reset Pull−up Resistor 5.0 V		R_{RO}	 15	 30	 50	kΩ
Reset Delay Time (DPAK−5, D2PAK−5) (Note 13)	Min Available Time Max Available Time	t_{RD}	6.4 102.4 (20%)	8.0 128	9.6 153.6 (20%)	ms
Reset Delay Time (D2PAK−7) (Note 13)	Min Available Time, DT connected to GND Max Available Time, DT connected to V_{out}	t_{RD}	3.2 102.4 (20%)	4.0 128	4.8 153.6 (20%)	ms
Reset Reaction Time (see Figure 33)		t_{RR}	16	25	38	μs
THERMAL SHUTDOWN						
Thermal Shutdown Temperature (Note 12)		T_{SD}	150	175	195	°C
Thermal Shutdown Hysteresis (Note 12)		T_{SH}	–	25	–	°C

9. Refer to ABSOLUTE MAXIMUM RATINGS and APPLICATION INFORMATION for Safe Operating Area.
10. Performance guaranteed over the indicated operating temperature range by design and/or characterization tested at $T_A \approx T_J$. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.
11. Measured when output voltage falls 100 mV below the regulated voltage at V_{in} = 13.2 V.
12. Values based on design and/or characterization.
13. See APPLICATION INFORMATION section for Reset Thresholds and Reset Delay Time Options

TYPICAL CHARACTERISTICS

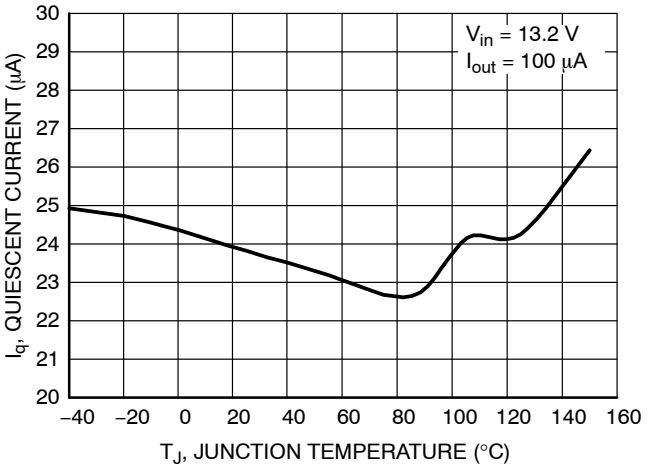


Figure 4. Quiescent Current vs. Temperature

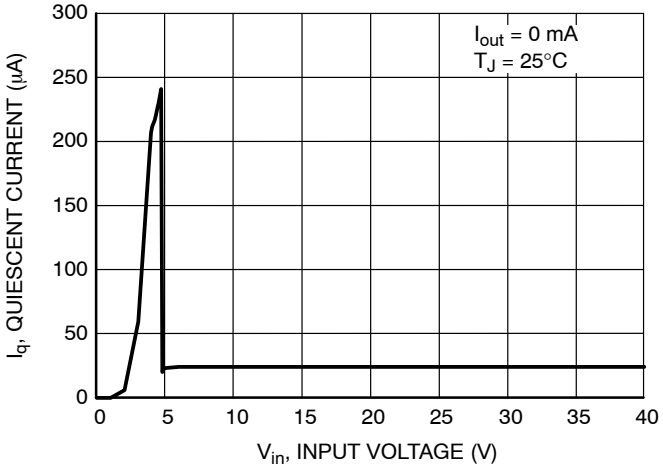


Figure 5. Quiescent Current vs. Input Voltage

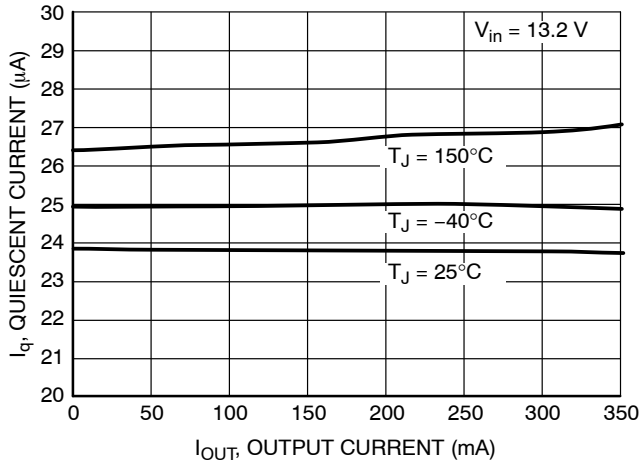


Figure 6. Quiescent Current vs. Output Current

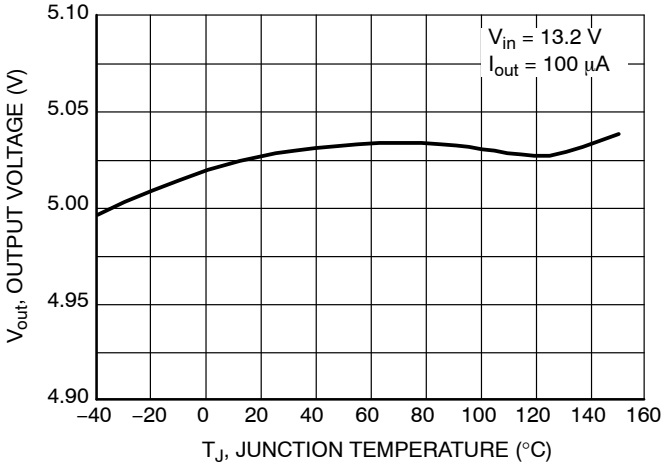


Figure 7. Output Voltage vs. Temperature (5 V Option)

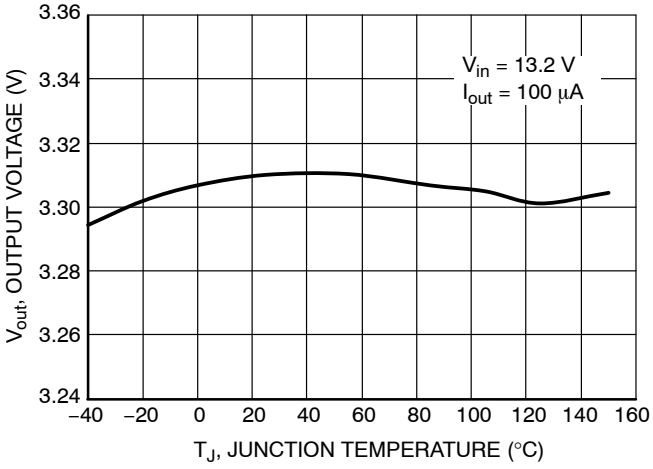


Figure 8. Output Voltage vs. Temperature (3.3 V Option)

TYPICAL CHARACTERISTICS

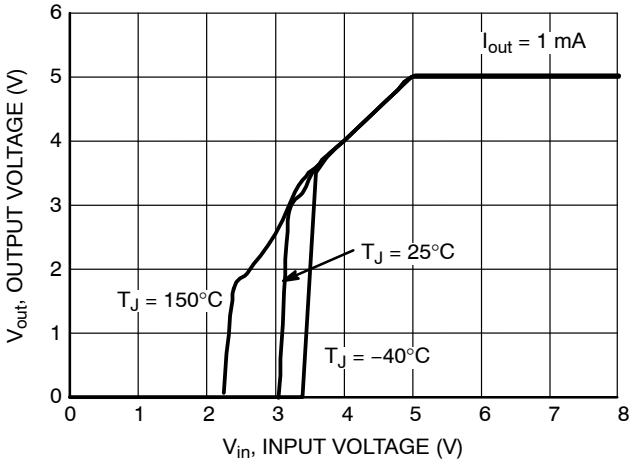


Figure 9. Output Voltage vs. Input Voltage (5 V Option)

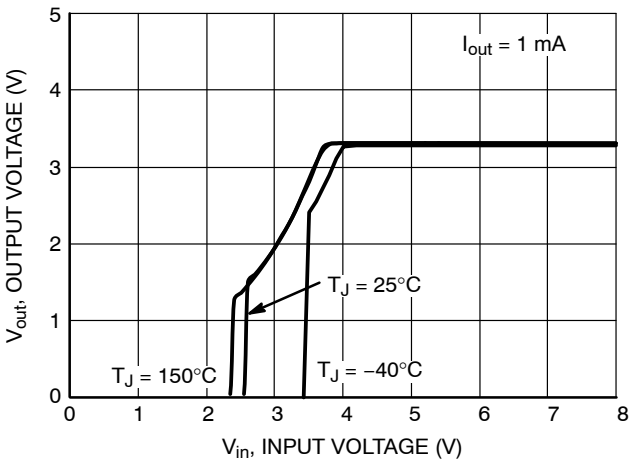


Figure 10. Output Voltage vs. Input Voltage (3.3 V Option)

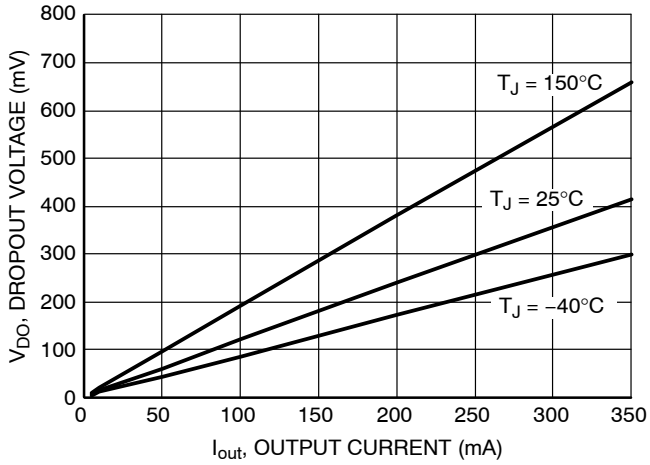


Figure 11. Dropout vs. Output Current (5 V Option)

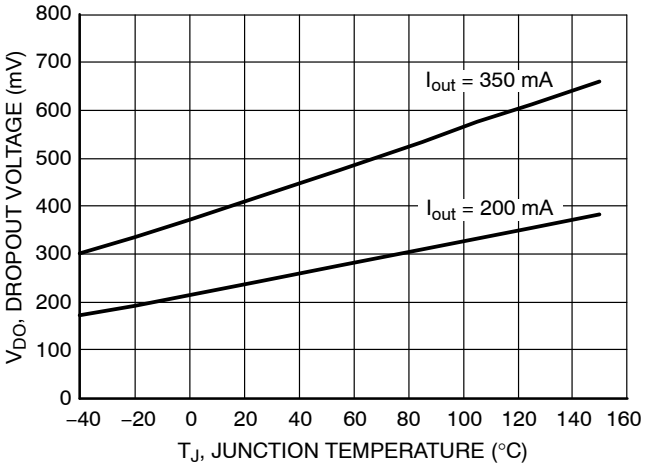


Figure 12. Dropout vs. Temperature (5 V Option)

TYPICAL CHARACTERISTICS

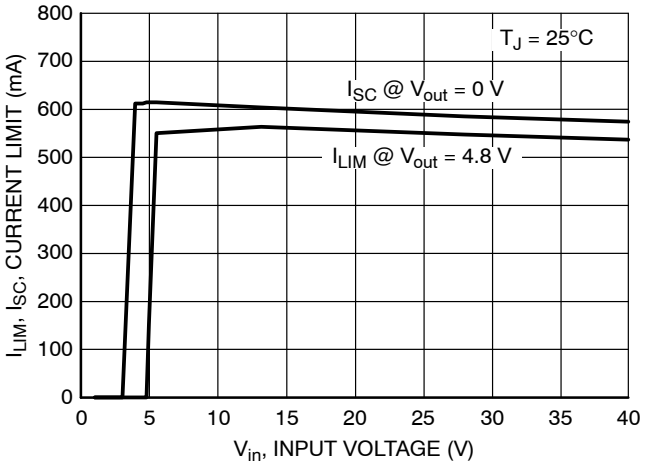


Figure 13. Output Current Limit vs. Input Voltage (5 V Option)

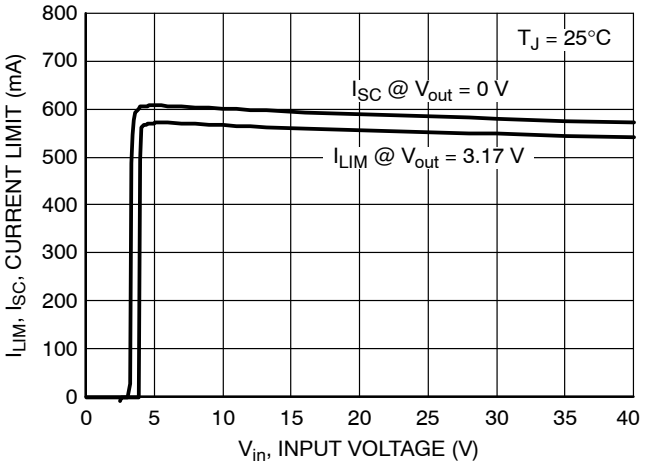


Figure 14. Output Current Limit vs. Input Voltage (3.3 V Option)

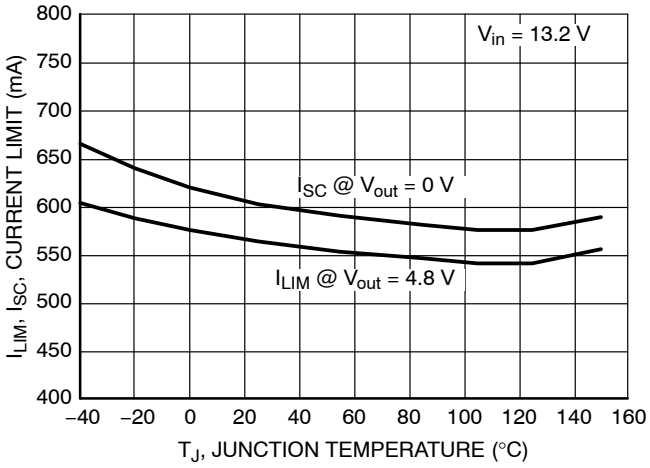


Figure 15. Output Current Limit vs. Temperature (5 V Option)

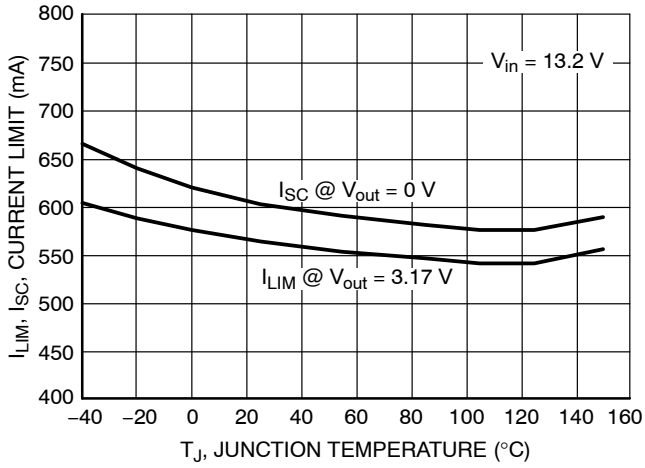


Figure 16. Output Current Limit vs. Temperature (3.3 V Option)

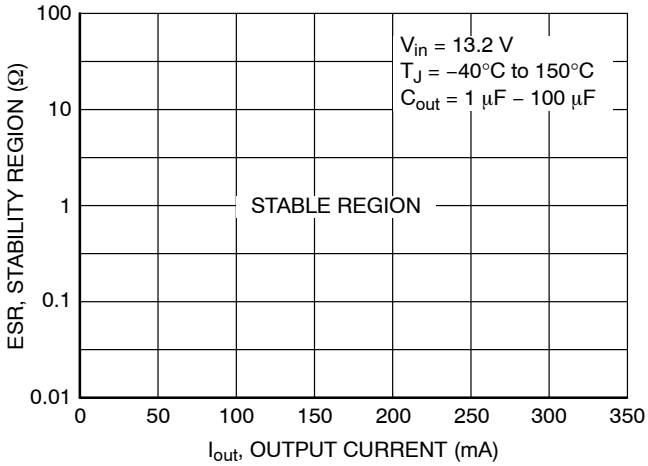


Figure 17. C_{out} ESR Stability Region vs. Output Current

TYPICAL CHARACTERISTICS

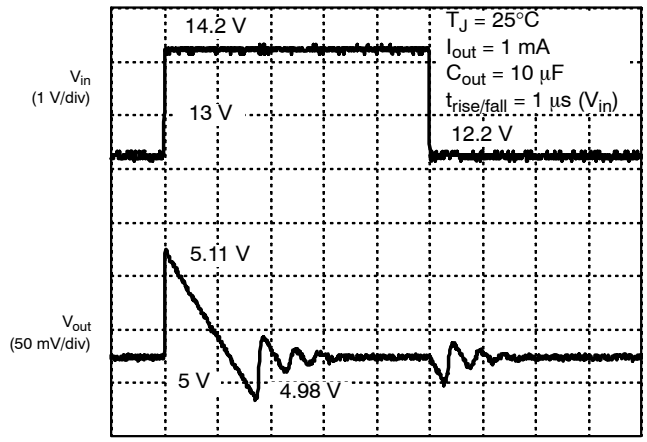


Figure 18. Line Transients (5 V Option)

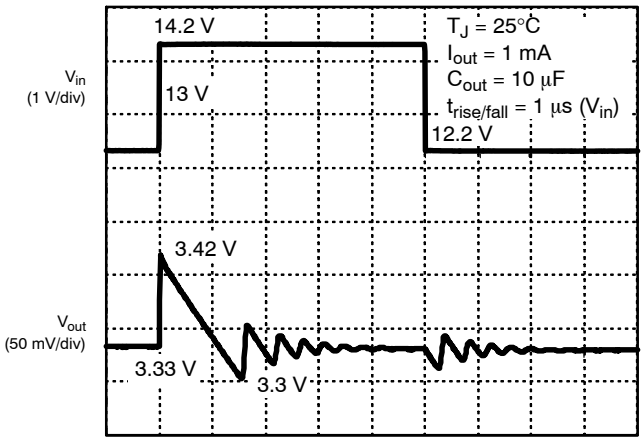


Figure 19. Line Transients (3.3 V Option)

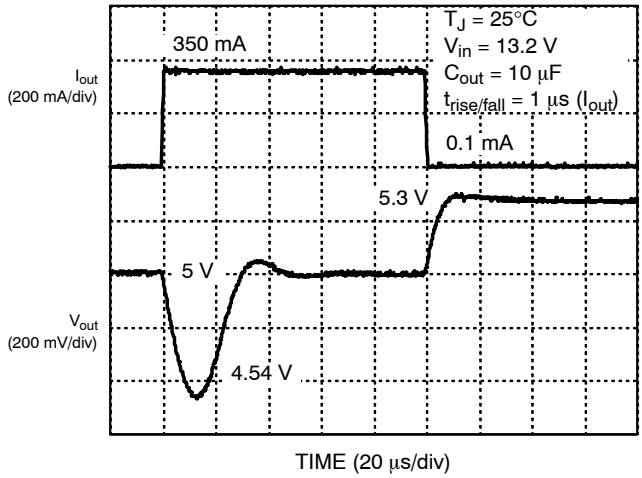


Figure 20. Load Transients (5 V Option)

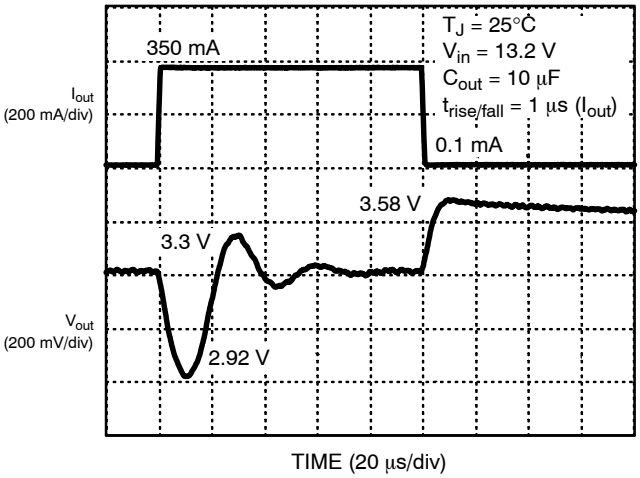


Figure 21. Load Transients (3.3 V Option)

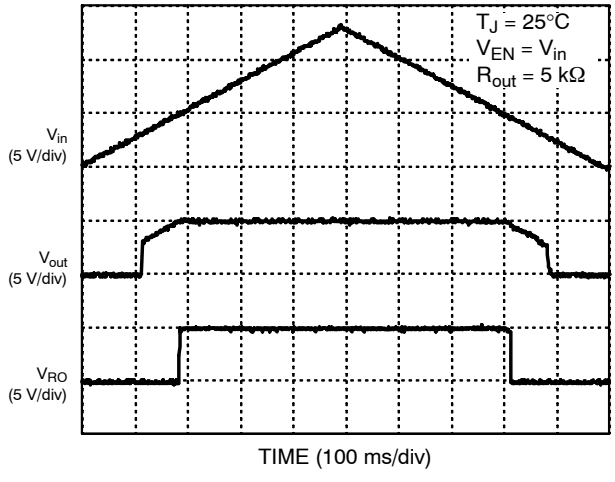


Figure 22. Power Up/Down Response (5 V Option)

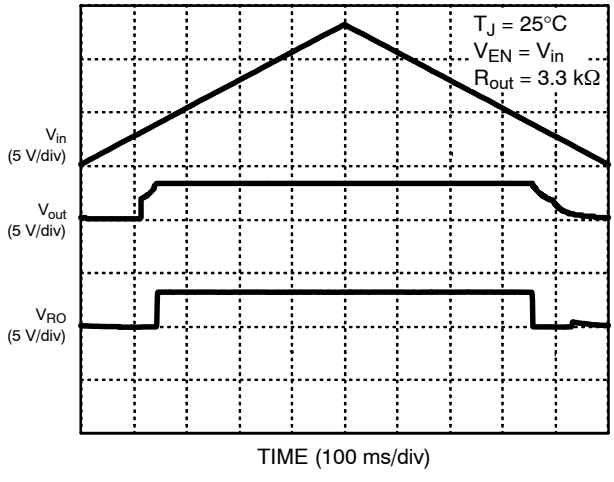


Figure 23. Power Up/Down Response (3.3 V Option)

TYPICAL CHARACTERISTICS

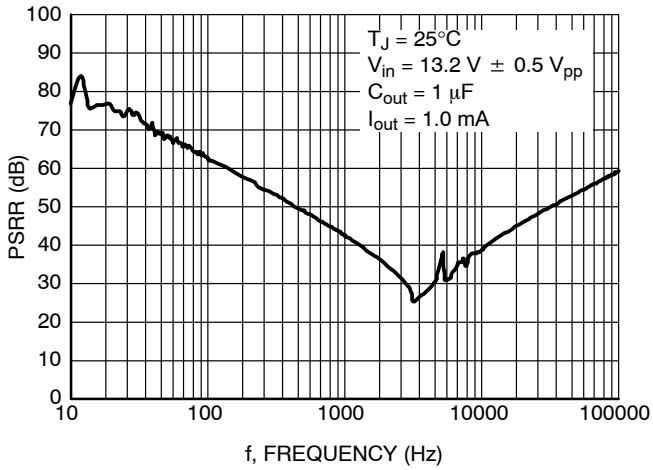


Figure 24. PSRR vs. Frequency (5 V Option)

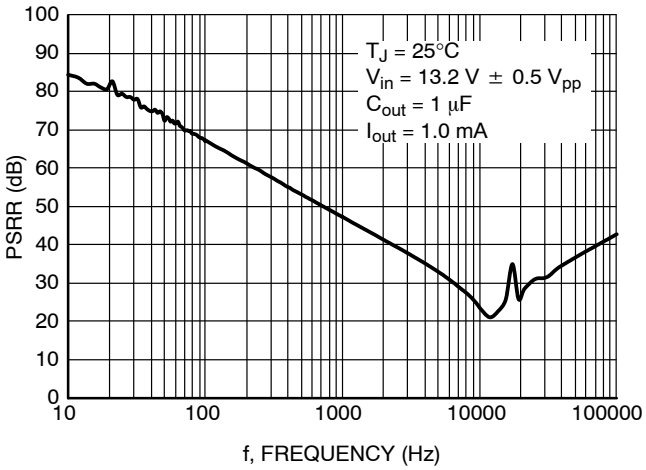


Figure 25. PSRR vs. Frequency (3.3 V Option)

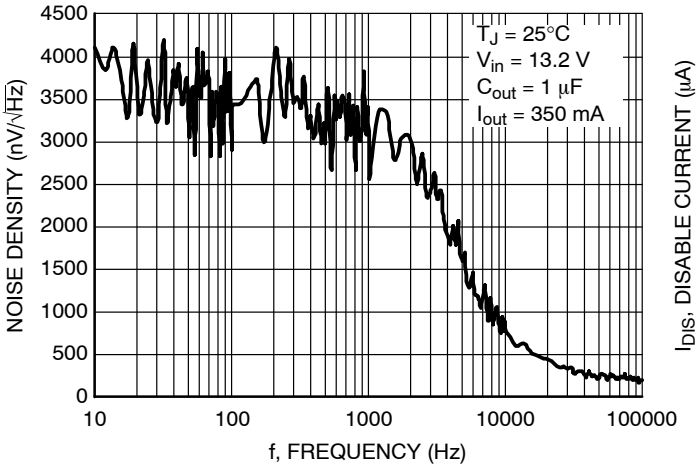


Figure 26. Noise vs. Frequency

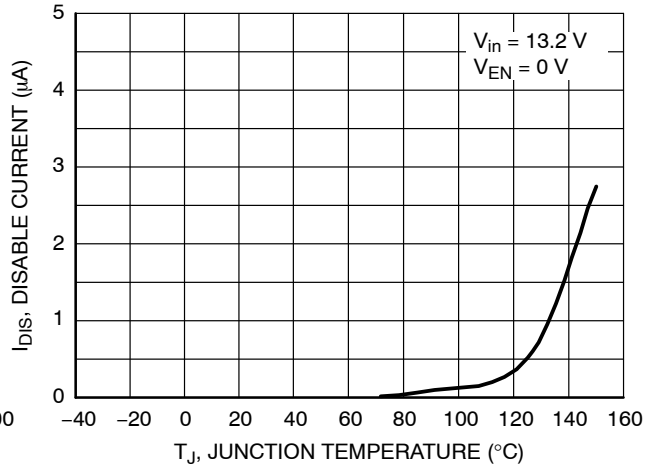


Figure 27. Disable Current vs. Temperature

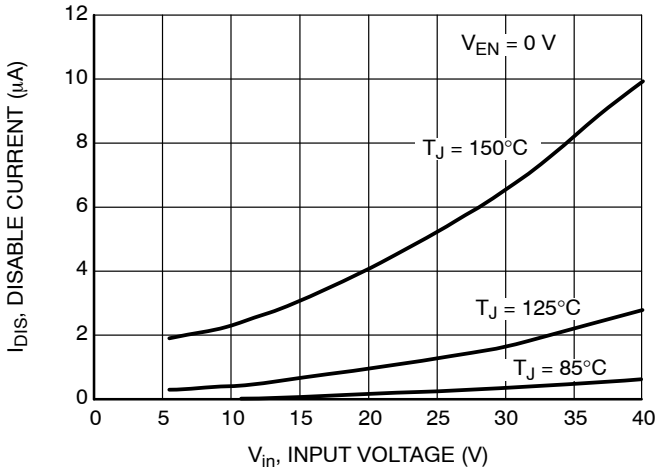


Figure 28. Disable Current vs. Input Voltage

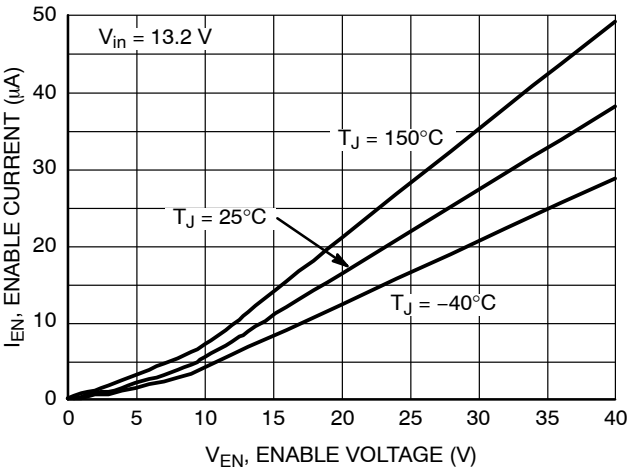


Figure 29. Enable Current vs. Enable Voltage

TYPICAL CHARACTERISTICS

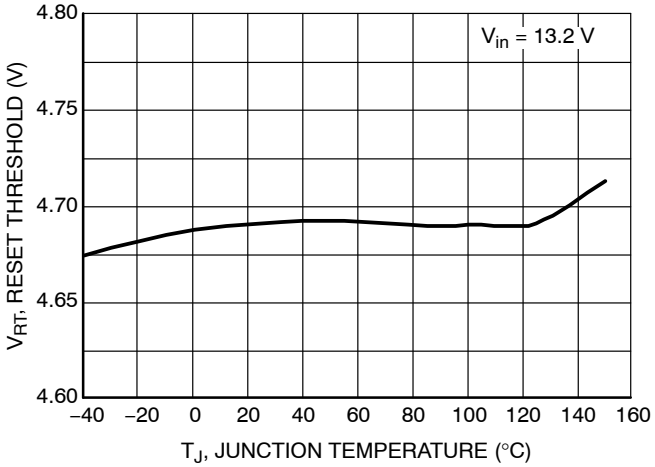


Figure 30. Reset Threshold vs. Temperature (5 V Option)

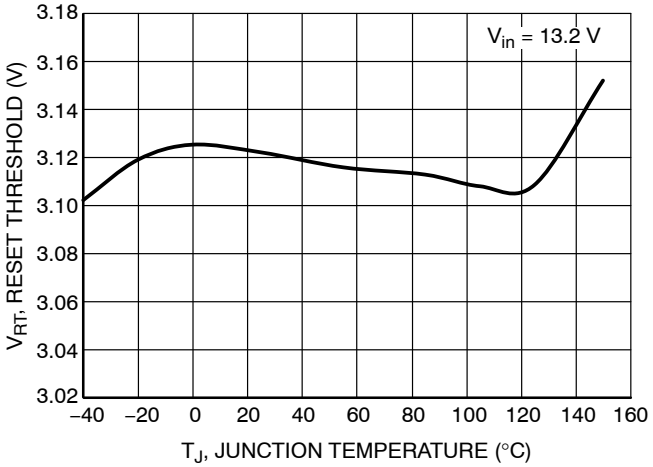


Figure 31. Reset Threshold vs. Temperature (3.3 V Option)

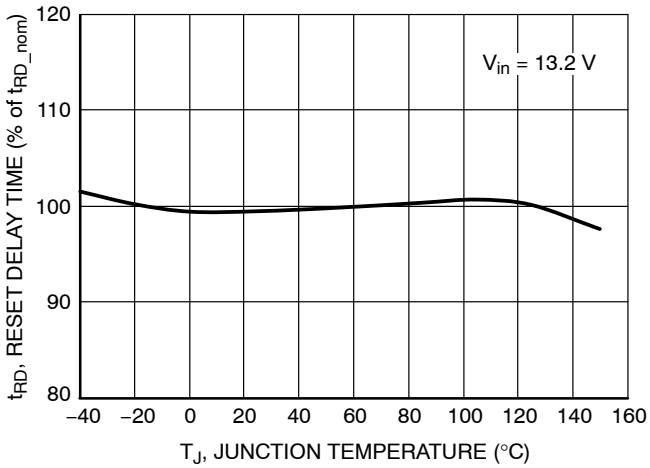


Figure 32. Reset Delay Time vs. Temperature

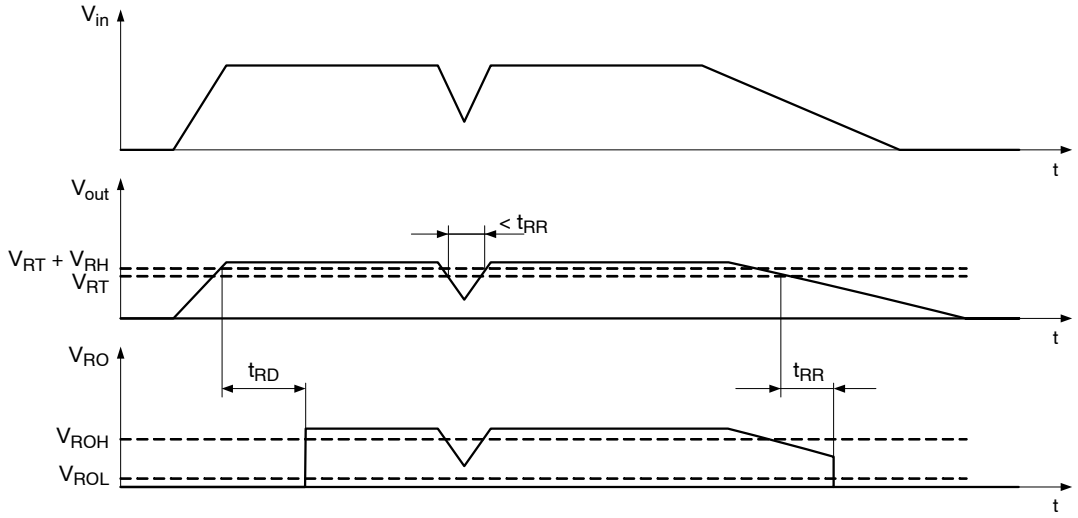


Figure 33. Reset Function and Timing Diagram

DEFINITIONS

General

All measurements are performed using short pulse low duty cycle techniques to maintain junction temperature as close as possible to ambient temperature.

Output voltage

The output voltage parameter is defined for specific temperature, input voltage and output current values or specified over Line, Load and Temperature ranges.

Line Regulation

The change in output voltage for a change in input voltage measured for specific output current over operating ambient temperature range.

Load Regulation

The change in output voltage for a change in output current measured for specific input voltage over operating ambient temperature range.

Dropout Voltage

The input to output differential at which the regulator output no longer maintains regulation against further reductions in input voltage. It is measured when the output drops 100 mV below its nominal value. The junction temperature, load current, and minimum input supply requirements affect the dropout level.

Quiescent and Disable Currents

Quiescent Current (I_q) is the difference between the input current (measured through the LDO input pin) and the output load current. If Enable pin is set to LOW the regulator reduces its internal bias and shuts off the output, this term is called the disable current (I_{DIS}).

Current Limit and Short Circuit Current Limit

Current Limit is value of output current by which output voltage drops below 96% of its nominal value. Short Circuit Current Limit is output current value measured with output of the regulator shorted to ground.

PSRR

Power Supply Rejection Ratio is defined as ratio of output voltage and input voltage ripple. It is measured in decibels (dB).

Line Transient Response

Typical output voltage overshoot and undershoot response when the input voltage is excited with a given slope.

Load Transient Response

Typical output voltage overshoot and undershoot response when the output current is excited with a given slope between low−load and high−load conditions.

Thermal Protection

Internal thermal shutdown circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When activated at typically 175°C, the regulator turns off. This feature is provided to prevent failures from accidental overheating.

Maximum Package Power Dissipation

The power dissipation level is maximum allowed power dissipation for particular package or power dissipation at which the junction temperature reaches its maximum operating value, whichever is lower.

APPLICATIONS INFORMATION

The NCV8772 regulator is self−protected with internal thermal shutdown and internal current limit. Typical characteristics are shown in Figure 4 to Figure 33.

Input Decoupling (C_{in})

A ceramic or tantalum 0.1 μF capacitor is recommended and should be connected close to the NCV8772 package. Higher capacitance and lower ESR will improve the overall line and load transient response.

If extremely fast input voltage transients are expected then appropriate input filter must be used in order to decrease rising and/or falling edges below 50 V/μs for proper operation. The filter can be composed of several capacitors in parallel.

Output Decoupling (C_{out})

The NCV8772 is a stable component and does not require a minimum Equivalent Series Resistance (ESR) for the output capacitor. Stability region of ESR vs Output Current is shown in Figure 17. The minimum output decoupling value is 1 μF and can be augmented to fulfill stringent load transient requirements. The regulator works with ceramic chip capacitors as well as tantalum devices. Larger values improve noise rejection and load regulation transient response.

Enable Operation

The Enable pin will turn the regulator on or off. The threshold limits are covered in the electrical characteristics table in this datasheet.

Reset Operation

A reset signal is provided on the Reset Output (RO) pin to provide feedback to the microprocessor of an out of regulation condition. The timing diagram of reset function is shown in Figure 33. This is in the form of a logic signal on RO. Output voltage conditions below the RESET threshold cause RO to go low. The RO integrity is maintained down to V_{out} = 1.0 V. For 5 V voltage option, the Reset Output (RO) circuitry includes internal pull−up (30 kΩ) connected to the output (V_{out}) No external pull−up is necessary.

RESET DELAY AND RESET THRESHOLD OPTIONS (DPAK−5 AND D2PAK−5)

	Reset Delay Time	Reset Threshold
NCV87721DT NCV87721D5S	8 ms	93%
NCV87722DT NCV87722D5S	16 ms	93%
NCV87723DT NCV87723D5S	32 ms	93%
NCV87724DT NCV87724D5S	64 ms	93%
NCV87725DT NCV87725D5S	128 ms	93%
NCV8772ADT NCV8772AD5S	8 ms	90%
NCV8772BDT NCV8772BD5S	16 ms	90%
NCV8772CDT NCV8772CD5S	32 ms	90%
NCV8772DDT NCV8772DD5S	64 ms	90%
NCV8772EDT NCV8772ED5S	128 ms	90%

NOTE: The timing values can be selected from the following list: 8, 16, 32, 64, 128 ms. Contact factory for options not included in ORDERING INFORMATION table on page 14.

Reset Delay Time Select (D2PAK−7 only)

Selection of the NCV8772yD7S devices and the state of the DT pin determines the available Reset Delay times. The part is designed for use with DT tied to ground or V_{out}, but may be controlled by any logic signal which provides a threshold between 0.8 V and 2 V. The default condition for an open DT pin is the slower Reset time (DT = GND condition). Times are in pairs and are highlighted in the chart below. Consult factory for availability. The Delay Time select (DT) pin is logic level controlled and provides Reset Delay time per the chart. Note the DT pin is sampled only when RO is low, and changes to the DT pin when RO is high will not effect the reset delay time.

RESET DELAY AND RESET THRESHOLD OPTIONS (D2PAK−7)

	DT = GND Reset Time	DT = V_{out} Reset Time	Reset Threshold
NCV87721D7S	8 ms	128 ms	93%
NCV87722D7S	8 ms	32 ms	93%
NCV87723D7S	16 ms	64 ms	93%
NCV87724D7S	32 ms	128 ms	93%
NCV87725D7S	4 ms	8 ms	93%
NCV8772AD7S	8 ms	128 ms	90%
NCV8772BD7S	8 ms	32 ms	90%
NCV8772CD7S	16 ms	64 ms	90%
NCV8772DD7S	32 ms	128 ms	90%
NCV8772ED7S	4 ms	8 ms	90%

NOTE: The timing values can be selected from the following list: 4, 8, 16, 32, 64, 128 ms. Contact factory for options not included in ORDERING INFORMATION table on page 14.

Thermal Considerations

As power in the NCV8772 increases, it might become necessary to provide some thermal relief. The maximum power dissipation supported by the device is dependent upon board design and layout. Mounting pad configuration on the PCB, the board material, and the ambient temperature affect the rate of junction temperature rise for the part. When the NCV8772 has good thermal conductivity through the PCB, the junction temperature will be relatively low with high power applications. The maximum dissipation the NCV8772 can handle is given by:

$$P_{D(max)} = \frac{\left[T_{J(max)} - T_A\right]}{R_{\theta JA}} \qquad \text{(eq. 1)}$$

Since T_J is not recommended to exceed 150°C, then the NCV8772 soldered on 645 mm^2, 1 oz copper area, FR4 can dissipate up to 2.35 W (for D2PAK−5) when the ambient temperature (T_A) is 25°C. See Figure 34 for $R_{\theta JA}$ versus PCB area. The power dissipated by the NCV8772 can be calculated from the following equations:

$$P_D = V_{in}\left(I_q @ I_{out}\right) + I_{out}\left(V_{in} - V_{out}\right) \qquad \text{(eq. 2)}$$

or

$$V_{in(max)} = \frac{P_{D(max)} + \left(V_{out} \times I_{out}\right)}{I_{out} + I_q} \qquad \text{(eq. 3)}$$

NOTE: Items containing I_q can be neglected if $I_{out} >> I_q$.

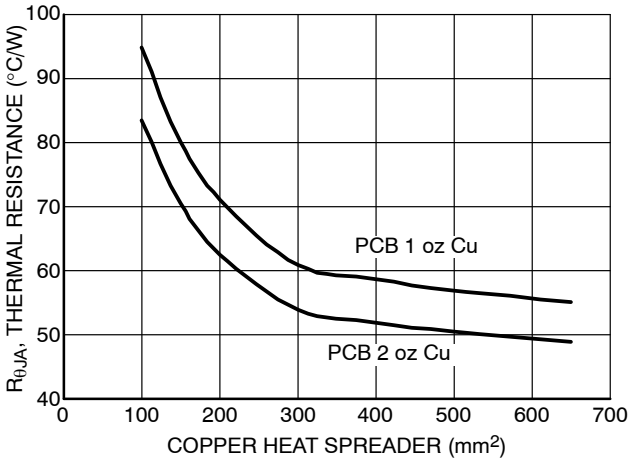


Figure 34. Thermal Resistance vs. PCB Copper Area (D2PAK−5)

Hints

V_{in} and GND printed circuit board traces should be as wide as possible. When the impedance of these traces is high, there is a chance to pick up noise or cause the regulator to malfunction. Place external components, especially the output capacitor, as close as possible to the NCV8772 and make traces as short as possible.


ORDERING INFORMATION

Device	Output Voltage	Reset Delay Time (DT = GND/V_{out} for D2PAK−7)	Reset Threshold	Marking	Package	Shipping†
NCV87722DT50RKG	5.0 V	16 ms	93%	772250G	DPAK−5 (Pb−Free)	2500 / Tape & Reel
NCV87721D5S50R4G	5.0 V	8 ms	93%	NC V8772150	D2PAK−5 (Pb−Free)	800 / Tape & Reel
NCV87725D7S50R4G	5.0 V	4/8 ms	93%	NC V8772550	D2PAK−7 (Pb−Free)	750 / Tape & Reel
NCV87722DT33RKG	3.3 V	16 ms	93%	772233G	DPAK−5 (Pb−Free)	2500 / Tape & Reel
NCV87722D5S33R4G	3.3 V	16 ms	93%	NC V8772233	D2PAK−5 (Pb−Free)	800 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS


ON Semiconductor®



DPAK−5, CENTER LEAD CROP
CASE 175AA
ISSUE B

DATE 15 MAY 2014


SCALE 1:1

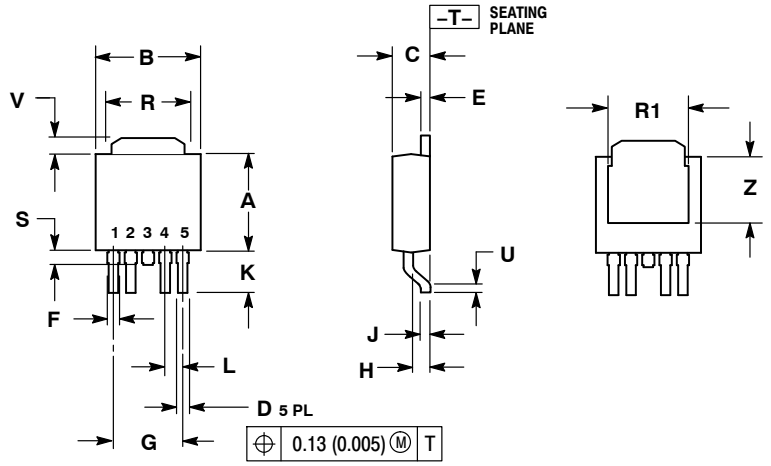

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.235	0.245	5.97	6.22
B	0.250	0.265	6.35	6.73
C	0.086	0.094	2.19	2.38
D	0.020	0.028	0.51	0.71
E	0.018	0.023	0.46	0.58
F	0.024	0.032	0.61	0.81
G	0.180 BSC		4.56 BSC	
H	0.034	0.040	0.87	1.01
J	0.018	0.023	0.46	0.58
K	0.102	0.114	2.60	2.89
L	0.045 BSC		1.14 BSC	
R	0.170	0.190	4.32	4.83
R1	0.185	0.210	4.70	5.33
S	0.025	0.040	0.63	1.01
U	0.020	−−−	0.51	−−−
V	0.035	0.050	0.89	1.27
Z	0.155	0.170	3.93	4.32


RECOMMENDED SOLDERING FOOTPRINT*

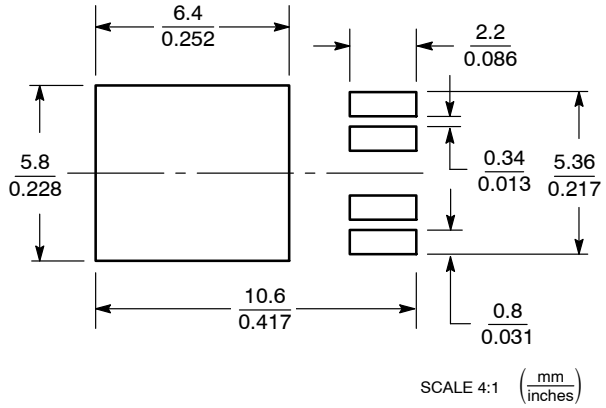

SCALE 4:1 (mm / inches)

*For additional information on our Pb−Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GENERIC MARKING DIAGRAMS*



IC **Discrete**

XXXXXX	= Device Code
A	= Assembly Location
L	= Wafer Lot
Y	= Year
WW	= Work Week
G	= Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪”, may or may not be present.


DOCUMENT NUMBER:	**98AON12855D**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**DPAK−5 CENTER LEAD CROP**	**PAGE 1 OF 1**

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS


ON Semiconductor®




D²PAK 5−LEAD
CASE 936A−02
ISSUE E

DATE 28 JUL 2021


SCALE 1:1

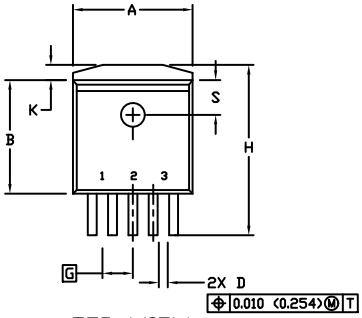


TOP VIEW




SIDE VIEW
DUAL GUAGE CONSTRUCTION




BOTTOM VIEW



SIDE VIEW
SINGLE GUAGE CONSTRUCTION



DETAIL C
TIP LEADFORM
ROTATED 90° CW




BOTTOM VIEW
OPTIONAL CONSTRUCTIONS

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCHES
3. TAB CONTOUR OPTIONAL WITHIN DIMENSIONS A AND K.
4. DIMENSIONS U AND V ESTABLISH A MINIMUM MOUNTING SURFACE FOR TERMINAL 4.
5. DIMENSIONS A AND B DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.025 (0.635) MAXIMUM.


	INCHES		MILLIMETERS	
DIM	MIN.	MAX.	MIN.	MAX.
A	0.396	0.403	9.804	10.236
B	0.356	0.368	9.042	9.347
C	0.170	0.180	4.318	4.572
D	0.026	0.036	0.660	0.914
ED	0.045	0.055	1.143	1.397
ES	0.018	0.026	0.457	0.660
G	0.067 BSC		1.702 BSC	
H	0.539	0.579	13.691	14.707
K	0.050 REF		1.270 REF	
L	0.000	0.010	0.000	0.254
M	0.088	0.102	2.235	2.591
N	0.018	0.026	0.457	0.660
P	0.058	0.078	1.473	1.981
R	0°	8°	0°	8°
S	0.116 REF		2.946 REF	
U	0.200 MIN		5.080 MIN	
V	0.250 MIN		6.350 MIN	



RECOMMENDED
MOUNTING FOOTPRINT *

* For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GENERIC MARKING DIAGRAM*



XXXXXX	= Device Code
A	= Assembly Location
WL	= Wafer Lot
Y	= Year
WW	= Work Week
G	= Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “▪”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	**98ASH01006A**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	**D2PAK 5−LEAD**	**PAGE 1 OF 1**

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.


© Semiconductor Components Industries, LLC, 2019

MECHANICAL CASE OUTLINE
PACKAGE DIMENSIONS


ON Semiconductor®


D²PAK–7 (SHORT LEAD)
CASE 936AB–01
ISSUE B

DATE 08 SEP 2009




SCALE 1:1

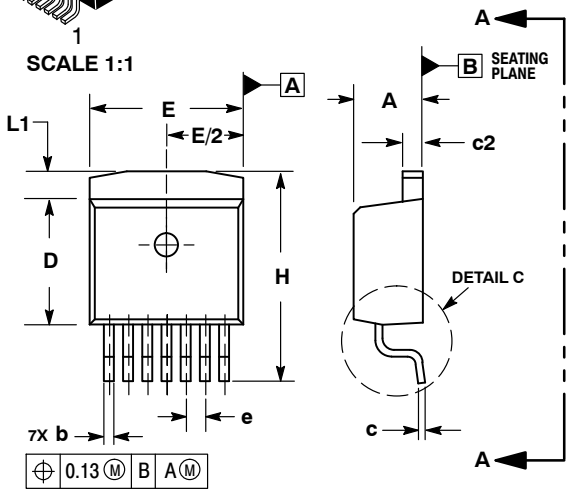



VIEW A–A

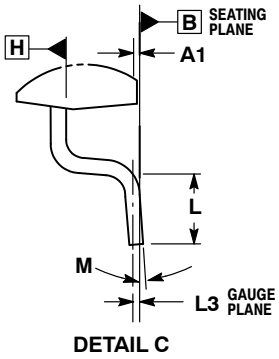


DETAIL C

NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCHES.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH AND GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.005 MAXIMUM PER SIDE. THESE DIMENSIONS TO BE MEASURED AT DATUM H.
4. THERMAL PAD CONTOUR OPTIONAL WITHIN DIMENSIONS E, L1, D1, AND E1. DIMENSIONS D1 AND E1 ESTABLISH A MINIMUM MOUNTING SURFACE FOR THE THERMAL PAD.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	0.170	0.180	4.32	4.57
A1	0.000	0.010	0.00	0.25
b	0.026	0.036	0.66	0.91
c	0.017	0.026	0.43	0.66
c2	0.045	0.055	1.14	1.40
D	0.325	0.368	8.25	9.53
D1	0.270	---	6.86	---
E	0.380	0.420	9.65	10.67
E1	0.245	---	6.22	---
e	0.050 BSC		1.27 BSC	
H	0.539	0.579	13.69	14.71
L	0.058	0.078	1.47	1.98
L1	---	0.066	---	1.68
L3	0.010 BSC		0.25 BSC	
M	0 °	8 °	0 °	8 °


RECOMMENDED SOLDERING FOOTPRINT*

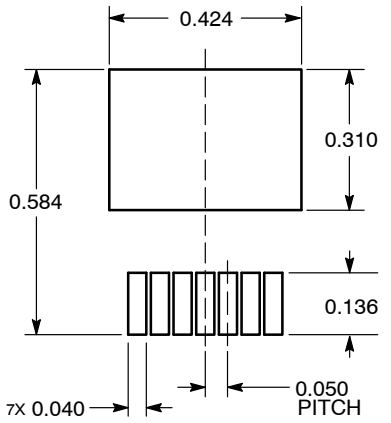

DIMENSIONS: MILLIMETERS

*For additional information on our Pb–Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GENERIC MARKING DIAGRAM*



XXXXX = Specific Device Code
A = Assembly Location
WL = Wafer Lot
Y = Year
WW = Work Week
G = Pb–Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb–Free indicator, “G” or microdot “ ▪”, may or may not be present.

DOCUMENT NUMBER:	98AON14119D	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	D²PAK–7 (SHORT LEAD)	PAGE 1 OF 1

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT
North American Technical Support:
Voice Mail: 1 800−282−9855 Toll Free USA/Canada
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:
Phone: 00421 33 790 2910
For additional information, please contact your local Sales Representative

◊