


### Intellimod™ Module Three Phase + Brake IGBT Inverter Output 300 Amperes/600 Volts

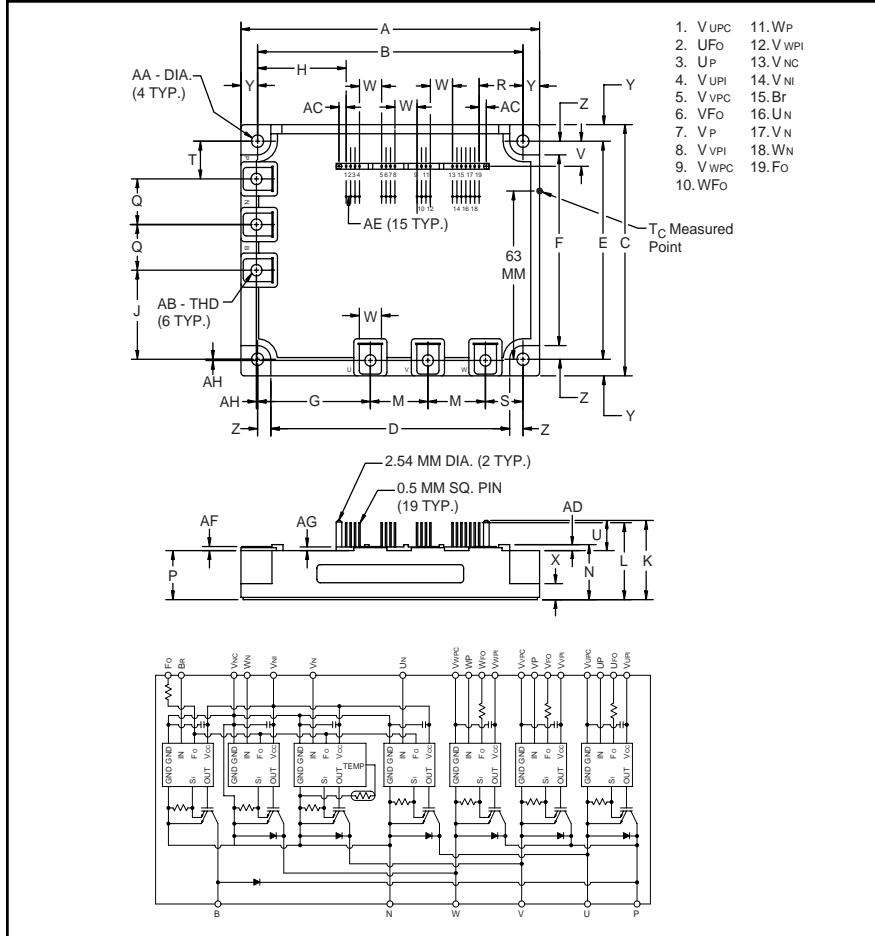

#### Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

#### Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Current
  - Over Temperature
  - Under Voltage
- Low Loss Using 4th Generation IGBT Chip

#### Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

#### Ordering Information:

Example: Select the complete part number from the table below -i.e. PM300RSD060 is a 600V, 300 Ampere Intellimod™ Intelligent Power Module.

#### Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	5.31±0.04	135.0±1.0
B	4.74±0.02	120.5±0.5
C	4.33±0.04	110.0±1.0
D	4.27	10.5
E	3.76±0.02	95.5±0.5
F	3.29	83.5
G	2.01	51.0
H	1.602	40.68
J	1.56	39.5
K	1.37	34.7
L	1.33	33.7
M	1.02	26.0
N	0.95 +0.06/-0.0	24.1 +1.5/-0.0
P	0.85	21.5
Q	0.79	20.0
R	0.780	19.82

Dimensions	Inches	Millimeters
S	0.69	17.5
T	0.65	16.5
U	0.52	13.2
V	0.43	11.0
W	0.39	10.0
X	0.30	7.7
Y	0.285	7.25
Z	0.24	6.0
AA	0.22 Dia.	Dia. 5.5
AB	Metric M5	M5
AC	0.128	3.22
AD	0.10	2.6
AE	0.08	2.0
AF	0.07	1.8
AG	0.06	1.6
AH	0.02	0.5

Type	Current Rating Amperes	V <sub>CES</sub> Volts (x 10)
PM	300	60



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM300RSD060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**300 Amperes/600 Volts**

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	PM300RSD060	Units
Power Device Junction Temperature	$T_j$	-20 to 150	$^\circ\text{C}$
Storage Temperature	$T_{\text{stg}}$	-40 to 125	$^\circ\text{C}$
Case Operating Temperature	$T_C$	-20 to 100	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	920	Grams
Supply Voltage Protected by OC and SC ( $V_D = 13.5 - 16.5\text{V}$ , Inverter Part) $T_j = 125^\circ\text{C}$	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{\text{ISO}}$	2500	Volts

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_C$	300	Amperes
Peak Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_{\text{CP}}$	600	Amperes
Supply Voltage (Applied between P - N)	$V_{\text{CC}}$	400	Volts
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	500	Volts
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	781	Watts

**IGBT Brake Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_C$	100	Amperes
Peak Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_{\text{CP}}$	200	Amperes
FWDi Rated DC Reverse Voltage ( $T_C = 25^\circ\text{C}$ )	$V_{\text{R(DC)}}$	600	Volts
FWDi Forward Current ( $T_C = 25^\circ\text{C}$ )	$I_F$	100	Amperes
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	416	Watts

**Control Sector**

Supply Voltage Applied between ( $V_{\text{UP1}}-V_{\text{UPC}}$ , $V_{\text{VP1}}-V_{\text{VPC}}$ , $V_{\text{WP1}}-V_{\text{WPC}}$ , $V_{\text{N1}}-V_{\text{NC}}$ )	$V_D$	20	Volts
Input Voltage Applied between ( $U_P-V_{\text{UPC}}$ , $V_P-V_{\text{VPC}}$ , $W_P-V_{\text{WPC}}$ , $U_N-V_N$ , $W_N-B_1-V_{\text{NC}}$ )	$V_{\text{CIN}}$	20	Volts
Fault Output Supply Voltage (Applied between $F_O$ and $V_C$ )	$V_{\text{FO}}$	20	Volts
Fault Output Current ( $U_{\text{FO}}$ , $V_{\text{FO}}$ , $W_{\text{FO}}$ , $F_O$ )	$I_{\text{FO}}$	20	mA



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM300RSD060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**300 Amperes/600 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, T_j = 25^\circ\text{C},$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, T_j = 125^\circ\text{C},$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}$	—	—	10	mA
Diode Forward Voltage	$V_{EC}$	$-I_C = 300\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 300\text{A},$ $T_j = 25^\circ\text{C}$	—	1.70	2.3	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 300\text{A},$ $T_j = 125^\circ\text{C}$	—	1.70	2.3	Volts
Inductive Load Switching Times	$t_{on}$	$V_D = 15\text{V}, V_{CIN} = 0 \sim 15\text{V}$ $V_{CC} = 300\text{V}, I_C = 300\text{A}$ $T_j = 125^\circ\text{C}$	0.4	0.8	2.0	$\mu\text{S}$
	$t_{rr}$		—	0.15	0.3	$\mu\text{S}$
	$t_{C(on)}$		—	0.4	1.0	$\mu\text{S}$
	$t_{off}$		—	2.0	2.9	$\mu\text{S}$
	$t_{C(off)}$		—	0.6	1.2	$\mu\text{S}$
<b>IGBT Brake Sector</b>						
Collector Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, T_j = 25^\circ\text{C},$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, T_j = 125^\circ\text{C}, V_D = 15\text{V},$ $V_{CIN} = 15\text{V}$	—	—	10	mA
FWDi Forward Voltage	$V_{FM}$	$I_F = 100\text{A}$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 100\text{A},$ $T_j = 25^\circ\text{C}$	—	2.35	2.80	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 100\text{A},$ $T_j = 125^\circ\text{C}$	—	2.55	3.05	Volts



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM300RSD060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**300 Amperes/600 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Over Current Trip Level Inverter Part ( $V_D = 15\text{V}$ )	OC	$T_j = -20^\circ\text{C}$	—	—	1270	Amperes
		$T_j = 25^\circ\text{C}$	651	766	1060	Amperes
		$T_j = 125^\circ\text{C}$	390	—	—	Amperes
Over Current Trip Level Brake Part	OC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ , $V_D = 15\text{V}$	140	195	—	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$ , $V_D = 15\text{V}$	—	760	—	Amperes
Short Circuit Trip Level Brake Part			—	292	—	Amperes
Over Current Delay Time	$t_{\text{off}}(\text{OC})$	$V_D = 15\text{V}$	—	10	—	$\mu\text{S}$
Over Temperature Protection ( $V_D = 15\text{V}$ )	OT	Trip Level	111	118	125	$^\circ\text{C}$
	$\text{OT}_R$	Reset Level	—	100	—	$^\circ\text{C}$
Supply Circuit Under Voltage Protection ( $-20 \leq T_j \leq 125^\circ\text{C}$ )	UV	Trip Level	11.5	12.0	12.5	Volts
	$\text{UV}_R$	Reset Level	—	12.5	—	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ , $V_{\text{N1}}-V_{\text{NC}}$	—	60	82	mA
		$V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ , $V_{\text{XP1}}-V_{\text{XPC}}$	—	15	20	mA
Thermal Voltage ON	$V_{\text{th(on)}}$	Applied between	1.2	1.5	1.8	Volts
Thermal Voltage OFF	$V_{\text{th(off)}}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r-V_{\text{NC}}$	1.7	2.0	2.3	Volts
Input ON Threshold Voltage	$V_{\text{CIN(on)}}$	Applied between	—	—	0.8	Volts
Input OFF Threshold Voltage	$V_{\text{CIN(off)}}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r-V_{\text{NC}}$	4.0	—	—	Volts
Fault Output Current*	$I_{\text{FO(H)}}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	—	—	0.01	mA
	$I_{\text{FO(L)}}$	$V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$	—	10	15	mA
Minimum Fault Output Pulse Width*	$t_{\text{FO}}$	$V_D = 15\text{V}$	1.0	1.8	—	mS

\*Fault output is given only when the internal OC, SC, OT and UV protections schemes of either upper or lower device operate to protect it.



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM300RSD060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**300 Amperes/600 Volts**

### Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	—	—	0.16	°C/Watt
Inverter Part	$R_{th(j-c)F}$	Each FWDi	—	—	0.24	°C/Watt
	$R_{th(j-c)Q}$	Each IGBT*	—	—	0.10**	°C/Watt
	$R_{th(j-c)F}$	Each FWDi*	—	—	0.16**	°C/Watt
	Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	—	—	0.30
Brake Part	$R_{th(j-c)F}$	Each FWDi	—	—	0.80	°C/Watt
	$R_{th(j-c)Q}$	Each IGBT*	—	—	0.22**	°C/Watt
	$R_{th(j-c)F}$	Each FWDi*	—	—	0.36**	°C/Watt
	Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.018

\* $T_C$  measured point is just under chip.

\*\*If you use this value,  $R_{th(f-a)}$  should be measured just under the chips.


### Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	0 ~ 400	Volts
Control Supply Voltage***	$V_D$	Applied between $V_{UP1}$ - $V_{UPC}$ , $V_{N1}$ - $V_{NC}$ , $V_{VP1}$ - $V_{VPC}$ , $V_{WP1}$ - $V_{WPC}$	15 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$U_P, V_P, W_P, U_N, V_N, W_N, B_r$ - $V_{NC}$	4.0 ~ $V_D$	Volts
PWM Input Frequency	$f_{PWM}$	Using Application Circuit	0 ~ 20	kHz
Minimum Dead Time	$t_{DEAD}$	Input Signal	≥ 2.0	μS
		$I_F = 12mA$	≥ 2.5	μS


\*\*\* With ripple satisfying the following conditions:  $dv/dt$  swing ≤ ±5V/μs, Variation ≤ 2V peak to peak.

**PM300RSD060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
**300 Amperes/600 Volts**


**SATURATION VOLTAGE CHARACTERISTICS (TYPICAL) (INVERTER PART)**

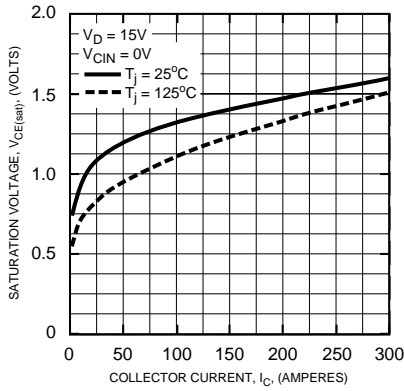


**DIODE FORWARD CHARACTERISTICS (INVERTER PART)**

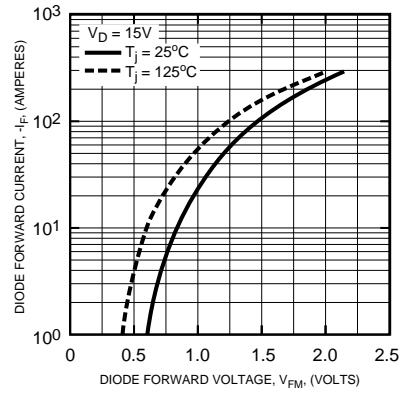


**REVERSE RECOVERY CURRENT VS. COLLECTOR CURRENT (TYPICAL)**

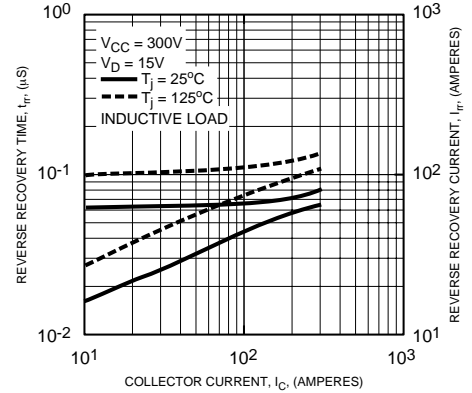

**SWITCHING LOSS CHARACTERISTICS**

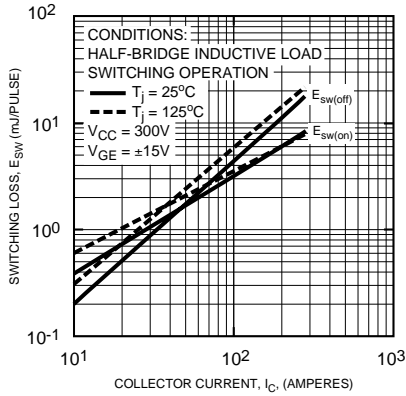

**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT & FWDI - INVERTER PART)**

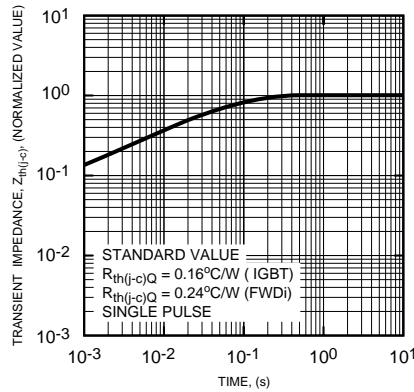

**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT & FWDI - BRAKE PART)**

