



SNDPG-series



Power factor correction module

Compact AC - DC converter, SNDPG series includes DPG series Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)

AC-DC Converter can be constituted in combination with SNDHS series and SNDBS series

Features

High efficiency 93% (AC100V), 96% (AC200V) Harmonic attenuator (Complies with IEC61000-3-2) Universal input voltage (AC85 - 264V) Built-in inrush current protection Enable signal (ENA)

Safety agency approvals

UL60950-1, C-UL and EN62368-1 Complies with DEN-AN



COSEL AC-DC Power Supplies Bus Converter · Power Module Value-added Type

Ordering information

SNDPG750

SNDPG 750 -1 2 3



①Series name
②Output power
750 : 750W (ACIN 200V) ③Optional C:with Coating R:with Remote ON/OFF (Enable signal)

Please refer to Instruction

* Please note that the unit's internal components is damaged if the output is short-circuit.


| MODEL | SNDPG750 | |
|-----------------------|------------|-------------|
| AC INPUT[V] | AC85 - 264 | AC170 - 264 |
| MAX OUTPUT WATTAGE[W] | 500 | 750 |
| DC OUTPUT VOLTAGE[V] | 2 360 | |

| | MODEL | | SNDPG750 | | |
|----------------------|--|------------|---|---|--|
| INPUT | VOLTAGE[V] | | AC85 - 264 1 φ | AC170 - 264 1 φ | |
| | POWER FACTOR CORRECTION | RANGE[V] | AC85 - 264 1 φ | | |
| | CURRENT[A] | | 5.72typ (ACIN 100V) | 4.24typ (ACIN 200V) | |
| | FREQUENCY[Hz] | | 50/60 (47 - 63) | | |
| | INRUSH CURRENT[A] AC100V | | 20/20 typ (Io=100%) (Primary inrush current / Secondary inrush current) (More than 10 sec. to re-start) | | |
| | | AC200V | 40/20 typ (lo=100%) (Primary inrush current / Secondary inrush current) (More than 10 sec. to re-start) | | |
| | EFFICIENCY[%] | | 93typ (ACIN 100V) | 96typ (ACIN 200V) | |
| | POWER FACTOR | | 0.96typ (ACIN 100V) | 0.93typ (ACIN 200V) | |
| | LEAKAGE CURRENT | [mA] | 0.75 max (60Hz, According to IEC62368-1 and DEN-AN) | | |
| - | WATTAGE[W] | | 500 | 750 | |
| | VOLTAGE[V] | *2 | 360 | | |
| | VOLTAGE ACCURACY | | ±2% | | |
| PROTECTION | OVERVOLTAGE PROTECTION[V] | | DC400 - 450V The power factor corrector function stops | | |
| CIRCUIT AND | ENA | *5 | Enable signal, Open-correcter output | | |
| OTHERS | OTHERS | *6 | Parallel operation impossible, Thermal protection | | |
| ISOLATION | INPUT-OUTPUT, RC | *9 | Non isolated | | |
| | INPUT, OUTPUT, RC- | FG *9 | AC2,800V 1minute Cutoff current = 10mA, DC500V, 50M Ω min (20±15 $^{\circ}$ C) | | |
| | OUTPUT-RC | *9 | AC100V 1minute Cutoff current = 25mA, DC100V, 10M Ω min (20±15 \degree) | | |
| ŀ | OPERATING TEMP., HUMID.AND A | LTITUDE *8 | -20 to +95°C (Aluminum base plate of the power module), 20 - 95%RH (Non condensing) (Refer to DERATING CURVE) 3,000m (10,000feet) max | | |
| | STORAGE TEMP., HUMID. AND | ALTITUDE | -20 to +95°C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max | | |
| | VIBRATION | | 10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis | | |
| | IMPACT | | 196.1m/s ² (20G), 11ms, once each along X, Y and Z axis | | |
| SAFETY | SAFETY AGENCY APP | ROVALS | UL60950-1, C-UL, EN62368-1, Complies with DEN-AN | | |
| | CONDUCTED NOISE | | Complies with FCC-A, VCCI-A, CISPR22-A, EN55011-A, EN55022-A | | |
| | HARMONIC ATTENU | ATOR *7 | Complies with IEC61000-3-2 | | |
| OTHERS - | CASE SIZE/WEIGHT | | 125×44.5×127mm [4.92×1.75×5.0inches] (W×H×D) / 600g max | | |
| | COOLING METHOD | | Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink) | | |
| *2 When the proporti | onal to the input voltage. ue is primary surge. The curre | | *7 Please contact us surge to a built-in noise filter (0.2ms or less) *8 Refer to the instruct | ction stops the power factor corrector function and the ENA signal. about class C. | |

*4 The value included the output setting and the line regulation, the load regulation and the temperature regulation. However, the input voltage is less than 240V.


SNDPG750 | CO\$EL

External view

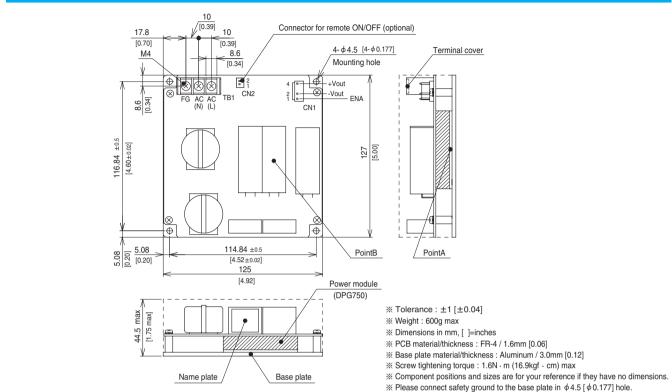


Performance data


STATIC CHARACTERISTICS (AC230V)

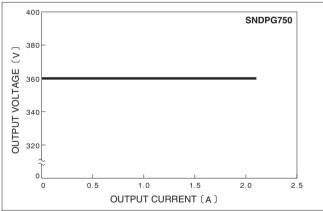

HARMONIC CURRENT (AC100V)

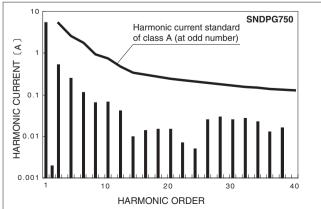

OUTPUT VOLTAGE FOR INPUT

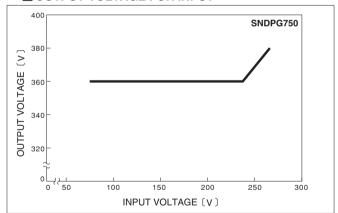

HARMONIC CURRENT (AC230V)

