

# POWER TRANSFORMER CHASSIS MOUNT: TOROIDAL WORLD SERIES

## VPT36-690

### **Electrical Specifications (@25C)**

1. Maximum Power: 25VA

2. Input Voltage: Series: 230VAC, 50/60Hz

**Parallel:** 115VAC, 50/60Hz

3. Output Voltage: Series: 36VAC CT @ 0.69A

Parallel: 18.0VAC @ 1.38A

4. Voltage Regulation: 12% TYP from full load to no load

5. Temperature Rise: 30°C TYP

6. Hipot: 4000VAC, Primary to Secondary

7. Efficiency: 87% TYP. @ full load

#### Construction:

The toroidal construction inherently helps reduce stray fields, increases efficiency and minimizes size compared to traditional EI transformers. Built with Class B (130°) insulation system.

#### Safety:

World Series Transformers are designed and manufactured to meet most International Safety agency standards.

#### **Agency File:**

UL: File E122529 UL 5085-1 & 2

CE: EN 61558-1:2005, EN 61558-2-6:1995, Low Voltage Directive (LVD) EN 6-000-6-6:2001+A11:2004, EN 55014-1:2000+A1:2001+A2:2002, EN 6100-6-1:2001, EN 55014-2:1997+A1:2001, Electromagnetic Compatibility (EMC)



Dimensions (mm):

H*	I.D.	O.D.
34.0 Max	19.0 Min	74.0 Max

\*Add 3mm to the height for mounting hardware Weight: 0.4Kg

### Mounting:

Transformer is provided with one metal mounting plate, two rubber pads, M5 x 40mm bolt, nut, spring and flat washer.

#### **Connections:**

Transformer is provided with 8" (200mm) long, 0.25" (6mm) stripped and tinned, stranded UL 1015 lead wire. Primaries are 22AWG, Secondaries are 22AWG.

Input1: Series – BLUE and BROWN, Jumper GRAY to VIOLET

Parallel - BLUE and BROWN, Jumper BLUE to VIOLET, GRAY to BROWN

Output1: Series - BLACK and YELLOW, Jumper RED to ORANGE

Parallel - BLACK and YELLOW, Jumper BLACK to ORANGE, RED to YELLOW


**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.


\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

460 Harley Knox Blvd. Perris. California 92571



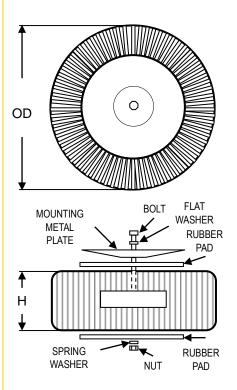



Publish Date: October 12, 2021

 $<sup>^{\</sup>mathrm{1}}$  Primary and secondary windings are designed to be connected in series or parallel. Windings are not intended to be used independently.