Multi- Aperture cores (2873001702)



Part Number: 2873001702

73 MULTI- APERTURE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.

All multi- aperture cores are supplied burnished.

Our "Multi- Aperture Core Kit" (part number 0199000036) is available for prototype evaluation.

For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.

Catalog Drawing 3D Model

Weight: 1.6 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	6.40	±0.30	0.252	_
В	12	±0.35	0.472	_
Е	2.75	±0.20	0.108	_
Н	1.1	+0.30	0.043	_




Figure 2

Chart Legend

+ Test frequency


Typical Impedance (Ω)			
10 MHz	193		
25 MHz ⁺	167		

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and A_L value. The high frequency 67 material is controlled for A_L value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is listed on our catalog drawing.

Catalog Drawing

Multi- aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi- hole beads are tested for A_L value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

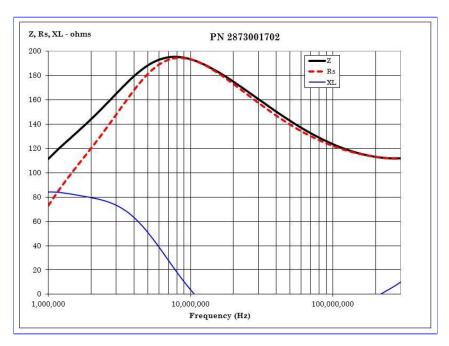

CSV Download

Fair- Rite Products Corp. One Commercial Row, Wallkill, New York 12589-0288
888-324-7748 845-895-2055 Fax: 845-895-2629 Fax: 845-895-2629 www.fair-rite.com