

# E Cores (9495111002)



Part Number: 9495111002

95 E CORE SET

**The E core geometry offers an economical design approach for inductive applications in a variety of power designs.**


E cores can be supplied with the center post gapped to a mechanical dimension or an  $A_L$  value.

[Catalog Drawing](#)  
[3D Model](#)

Weight indicated is per pair or set.


Weight: 40.2 (g)

| Dim | mm   | mm tol | nominal inch | inch misc. |
|-----|------|--------|--------------|------------|
| A   | 33   | ±0.60  | 1.299        | —          |
| B   | 14   | ±0.30  | 0.551        | —          |
| C   | 12.7 | ±0.30  | 0.5          | —          |
| D   | 9.6  | ±0.30  | 0.378        | —          |
| E   | 22.8 | min    | 0.898        | min        |
| F   | 9.7  | ±0.30  | 0.382        | —          |

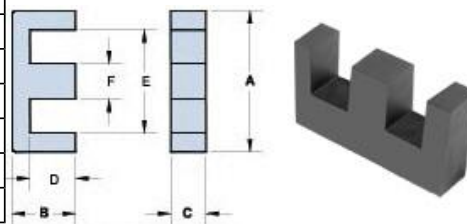

## Chart Legend

$\Sigma l / A$  : Core Constant,  $l_c$  : Effective Path Length,  $A_c$  : Effective Cross- Sectional Area,  $V_c$  : Effective Core Volume

$A_L$  : Inductance Factor 

Explanation of Part Numbers: Digits 1 & 2 = product class and 3 & 4 = material grade.

| Electrical Properties              |           |
|------------------------------------|-----------|
| $A_L$ (nH)                         | 5000 ±25% |
| $A_e$ (cm <sup>2</sup> )           | 1.19      |
| $\Sigma l / A$ (cm <sup>-1</sup> ) | 5.6       |
| $l_c$ (cm)                         | 6.65      |
| $V_c$ (cm <sup>3</sup> )           | 7.9       |
| $A_{min}$ (cm <sup>2</sup> )       | 1.12      |