

# SACC-MCI-M12MS-5CON - Contact carrier



1419988

<https://www.phoenixcontact.com/pc/products/1419988>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact carrier, 5-position, Pin, straight, M12, coding: A, Front mounting, Square flange, Crimp connection, 0.34 mm<sup>2</sup>, Item is lead-free in accordance with RoHS II without Exemption 6c (Pb < 0.1 %)

## Your advantages

- Convenient field assembly: device connectors for fast on-site mounting
- Contact carriers that are designed for assembly or available with preassembled litz wires
- Standard pin assignments for signal and power transmission with a uniform design-in design

## Commercial data

|                                      |                    |
|--------------------------------------|--------------------|
| Item number                          | 1419988            |
| Packing unit                         | 10 pc              |
| Minimum order quantity               | 10 pc              |
| Product key                          | ABQAGM             |
| Catalog page                         | Page 45 (C-2-2019) |
| GTIN                                 | 4046356533751      |
| Weight per piece (including packing) | 2.4 g              |
| Weight per piece (excluding packing) | 1.24 g             |
| Customs tariff number                | 85366990           |
| Country of origin                    | DE                 |

## Technical data

### Notes

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes on operation | <p>The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap &gt; IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Safety note        | <p><b>WARNING:</b> The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.</p> <ul style="list-style-type: none"> <li>• <b>WARNING:</b> Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.</li> <li>• <b>WARNING:</b> Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.</li> <li>• The products are suitable for applications in plant, controller, and electrical device engineering.</li> <li>• When operating the connectors in outdoor applications, they must be separately protected against environmental influences.</li> <li>• Assembled products may not be manipulated or improperly opened.</li> <li>• Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a>).</li> <li>• When using the product in direct connection with third-party manufacturers, the user is responsible.</li> <li>• For operating voltages &gt; 50 V AC, conductive connector housings must be grounded</li> <li>• Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.</li> <li>• Observe the corresponding technical data. You will find information: <ul style="list-style-type: none"> <li>o On the product</li> <li>o On the packing label</li> <li>o In the supplied documentation</li> <li>o Online at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a> under the product</li> </ul> </li> <li>• Only use tools recommended by Phoenix Contact</li> <li>• Use a protective cap to protect connectors that are not in use. The suitable accessories are available online in the accessory section of the product at <a href="https://www.phoenixcontact.com/products">phoenixcontact.com/products</a></li> <li>• Ensure that the protective or functional ground has been properly connected.</li> </ul> |

# SACC-MCI-M12MS-5CON - Contact carrier



1419988

<https://www.phoenixcontact.com/pc/products/1419988>

- VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
- The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).

## Product properties

|                      |     |
|----------------------|-----|
| Number of positions  | 5   |
| No. of cable outlets | 1   |
| Seal present         | no  |
| Shielded             | no  |
| Coding               | A   |
| Thread type          | M12 |

## Insulation characteristics

|                      |    |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution  | 3  |

## Electrical properties

|                       |                            |
|-----------------------|----------------------------|
| Rated surge voltage   | 1.5 kV                     |
| Contact resistance    | $\leq 3 \text{ m}\Omega$   |
| Insulation resistance | $\geq 100 \text{ M}\Omega$ |
| Nominal voltage $U_N$ | 60 V                       |
| Nominal current $I_N$ | 4 A                        |

## Connection data

|                   |                  |
|-------------------|------------------|
| Connection method | Crimp connection |
|-------------------|------------------|

## Signaling

|                        |    |
|------------------------|----|
| Status display         | No |
| Status display present | No |

## Material specifications

|                                        |        |
|----------------------------------------|--------|
| Flammability rating according to UL 94 | V0     |
| Contact carrier material               | PA 6.6 |

## Connector

### Connection 1

|                   |          |
|-------------------|----------|
| Head design       | Pin      |
| Head cable outlet | straight |
| Head thread type  | M12      |
| Coding            | A        |

## Cable/line

# SACC-MCI-M12MS-5CON - Contact carrier



1419988

<https://www.phoenixcontact.com/pc/products/1419988>

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Cable cross section             | 0.34 mm <sup>2</sup>                            |
| Ambient temperature (operation) | -40 °C ... 85 °C (cable, fixed installation)    |
|                                 | -25 °C ... 85 °C (Cable, flexible installation) |

## Mechanical properties

### Mechanical data

|                             |       |
|-----------------------------|-------|
| Insertion/withdrawal cycles | > 100 |
|-----------------------------|-------|

## Environmental and real-life conditions

### Ambient conditions

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Degree of protection            | IP67                                            |
|                                 | IP67                                            |
| Ambient temperature (operation) | -25 °C ... 85 °C (Plug / socket)                |
|                                 | -40 °C ... 85 °C (without mechanical actuation) |
|                                 | -25 °C ... 85 °C (Cable, flexible installation) |
|                                 | -40 °C ... 85 °C (cable, fixed installation)    |

## Standards and regulations

### M12


|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-101 |

## Mounting

|               |                                                |
|---------------|------------------------------------------------|
| Mounting type | Front mounting Square flange 25 mm side length |
| Assembly note | 25 mm side length                              |


## Drawings

Diagram

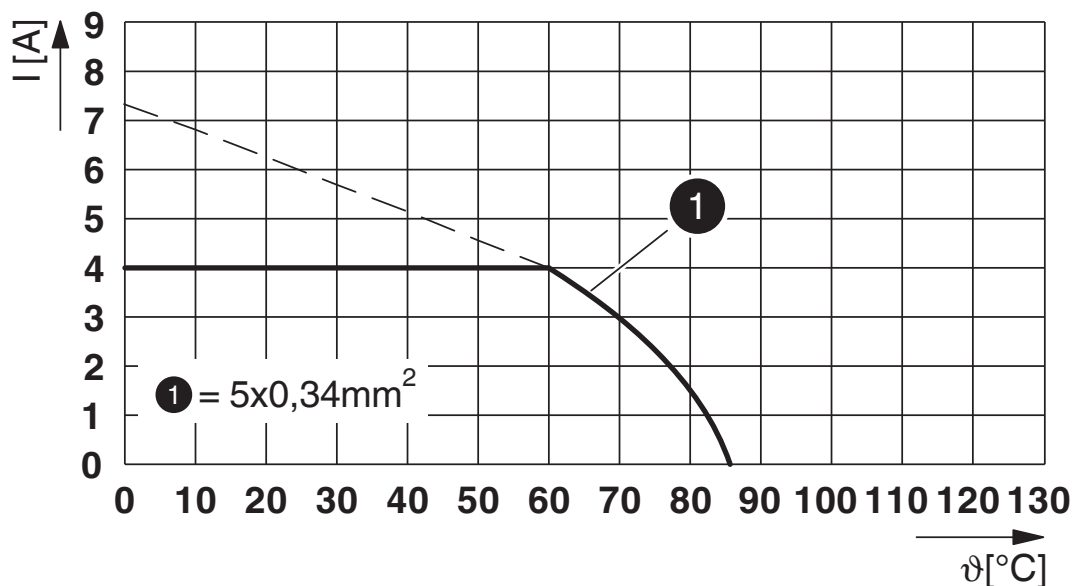

$I$  = current strength,  $T$  = ambient temperature

Schematic diagram

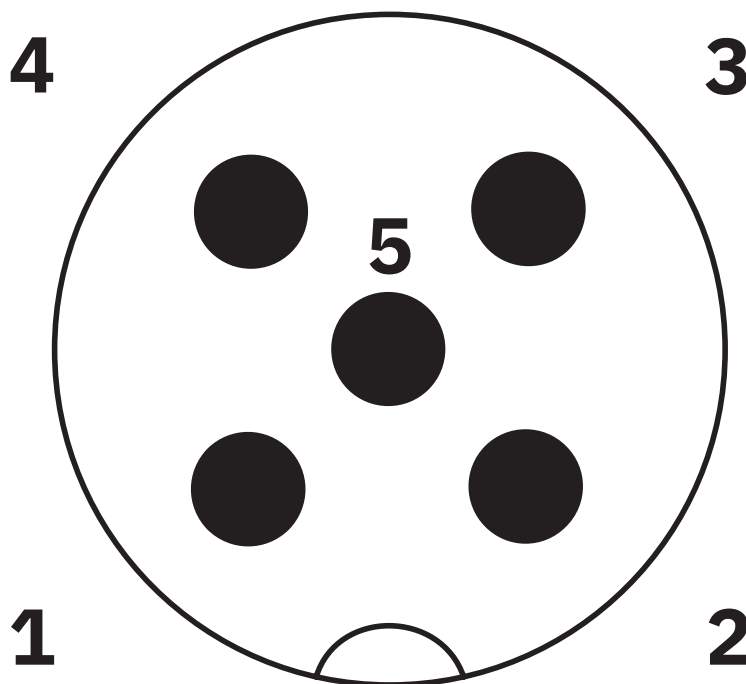

Pin assignment M12 male connector, 5-pos., A-coded, male side

# SACC-MCI-M12MS-5CON - Contact carrier



1419988

<https://www.phoenixcontact.com/pc/products/1419988>

Circuit diagram



# SACC-MCI-M12MS-5CON - Contact carrier



1419988

<https://www.phoenixcontact.com/pc/products/1419988>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440223 |
| ECLASS-12.0 | 27440116 |
| ECLASS-13.0 | 27440223 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC003557 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

# SACC-MCI-M12MS-5CON - Contact carrier



1419988

<https://www.phoenixcontact.com/pc/products/1419988>

## Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# SACC-MCI-M12MS-5CON - Contact carrier



1419988

<https://www.phoenixcontact.com/pc/products/1419988>

## Accessories

### CC-1,0-ST-0,34-MS AU - Crimp contact

1452356

<https://www.phoenixcontact.com/pc/products/1452356>



Crimp contact, Pin, turned, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.5 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1239798

### SACC-MSQ-M12MS-25-3,2 SCO - Housing screw connection

1419959

<https://www.phoenixcontact.com/pc/products/1419959>



Housing screw connection, M12-SPEEDCON, Front mounting, square flange 25 mm side length, Square flange

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)