CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Solder base element for PCB mounting for accommodating CB TM... or CB E... device circuit breakers

Commercial data

Item number	2905067
Packing unit	30 pc
Minimum order quantity	30 pc
Sales key	NULL
Product key	CLA193
Catalog page	Page 396 (C-4-2019)
GTIN	4046356916110
Weight per piece (including packing)	10.673 g
Weight per piece (excluding packing)	10.673 g
Customs tariff number	85366990
Country of origin	DE

Technical data

Product properties

Product type	Base element
Product family	CB BE
Type	Base element, PCB mounting

Electrical properties

General

Rated insulation voltage U_i	80 V DC
	277 V AC
Rated surge voltage	2.5 kV
Insertion/withdrawal cycles	50

Main circuit

Rated voltage	80 V DC
	277 V AC
Rated current I_N	16 A


Remote indication circuit

Rated voltage	80 V DC
	277 V AC
Rated current I_N	1 A

Connection data

Connection method	Solder connection

Dimensions

Dimensional drawing	
Width	12.3 mm
Height	34.8 mm
Depth	36.4 mm

Material specifications

Color	gray (RAL 7042)
Flammability rating according to UL 94	V0
Housing material	PA 6.6

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP30 (Plug-in area with plugged-in device)
	IP00 (Connection area)
Ambient temperature (operation)	-30 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Humidity test	240 h, 95 % RH, 40 °C

Standards and regulations


Standards/specifications	DIN EN 50155
Standards/specifications	IEC 60068-2

Mounting


Mounting type	On PCB

Drawings


Drilling plan/solder pad geometry

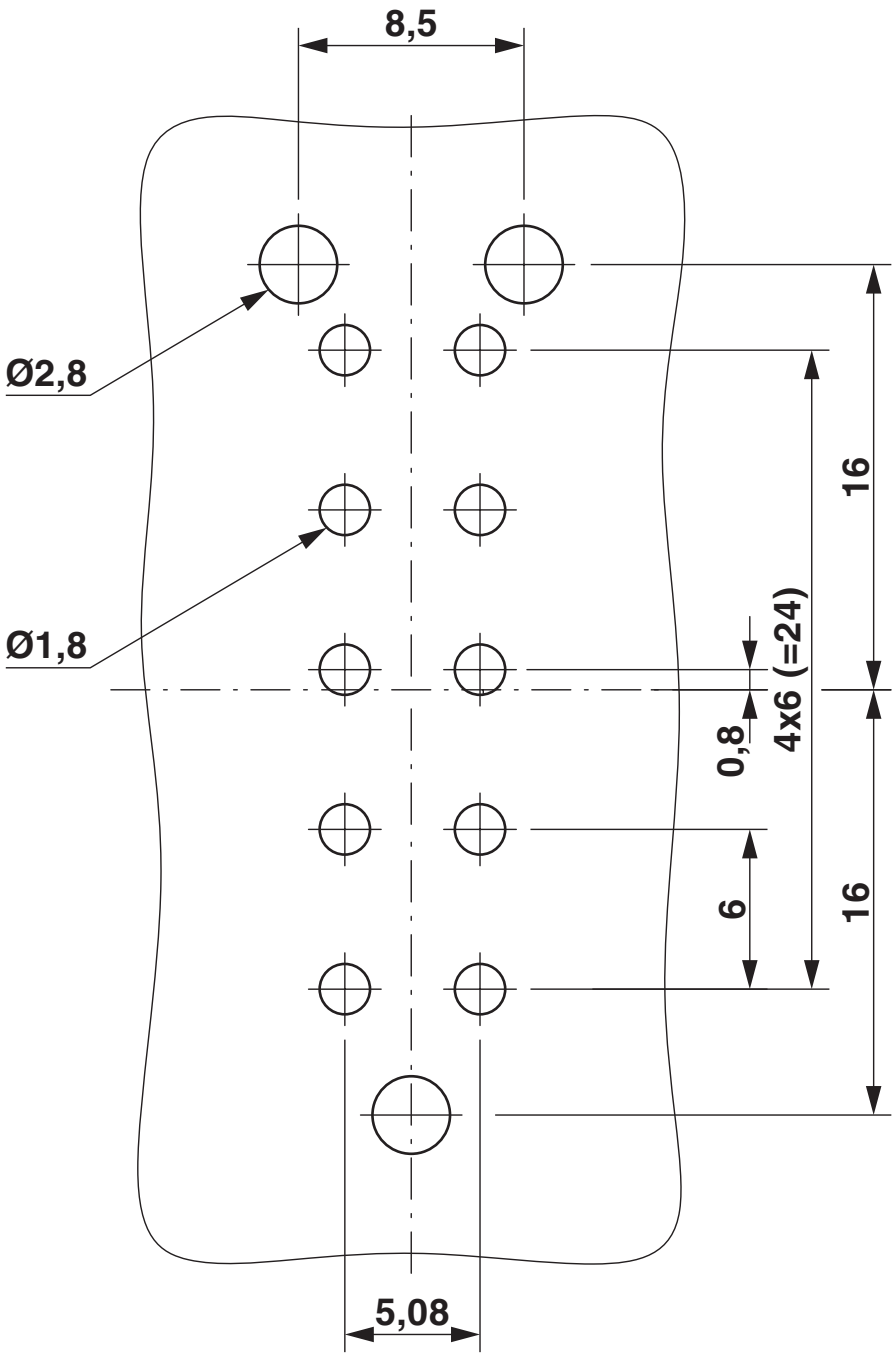

Circuit diagram

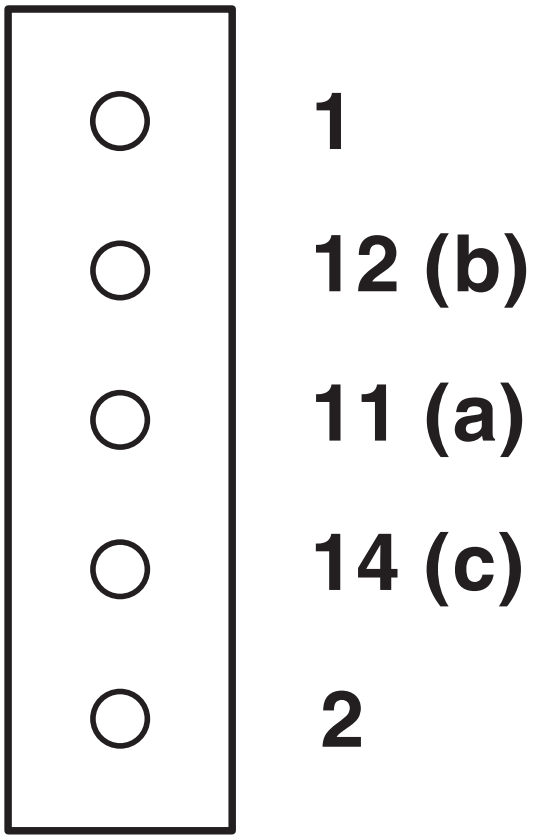

Dimensional drawing

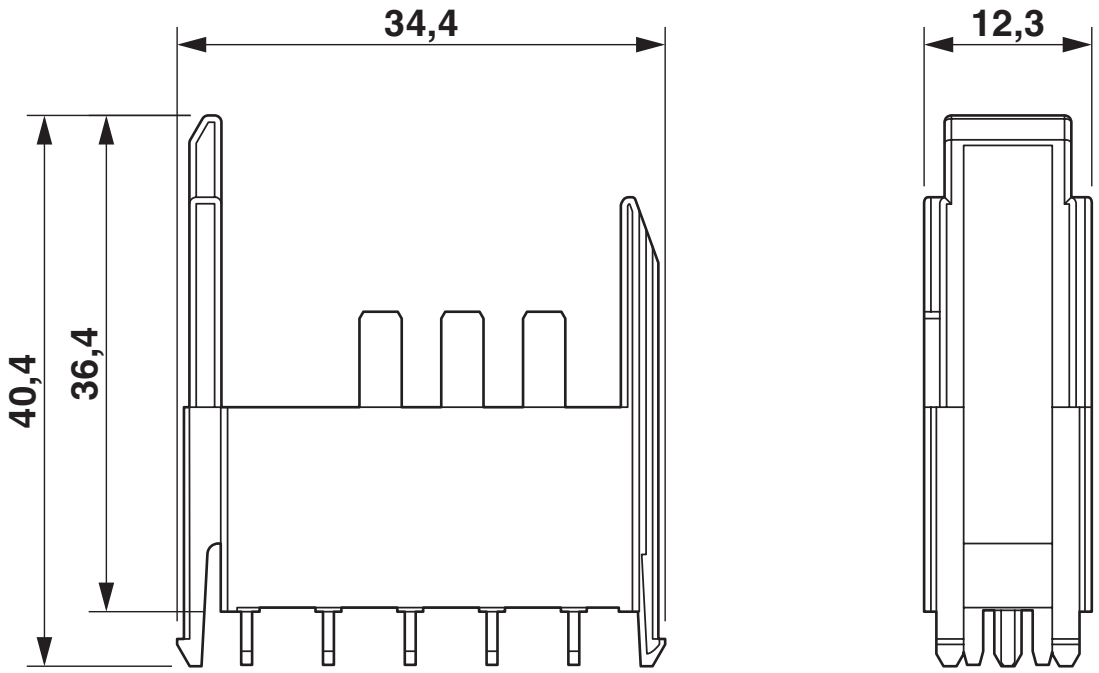

Classifications

ECLASS

ECLASS-11.0	27130803
ECLASS-13.0	27140492

ETIM

ETIM 9.0	EC002936

UNSPSC

UNSPSC 21.0	39121600

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Mandatory accessories

CB TM1 0.5A SFB P - Thermomagnetic device circuit breaker

2800835

https://www.phoenixcontact.com/us/products/2800835



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 1A SFB P - Thermomagnetic device circuit breaker

2800836

https://www.phoenixcontact.com/us/products/2800836



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 2A SFB P - Thermomagnetic device circuit breaker

2800837

https://www.phoenixcontact.com/us/products/2800837



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 3A SFB P - Thermomagnetic device circuit breaker

2800838

https://www.phoenixcontact.com/us/products/2800838



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 4A SFB P - Thermomagnetic device circuit breaker

2800839

https://www.phoenixcontact.com/us/products/2800839



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 5A SFB P - Thermomagnetic device circuit breaker

2800840

https://www.phoenixcontact.com/us/products/2800840



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 6A SFB P - Thermomagnetic device circuit breaker

2800841

https://www.phoenixcontact.com/us/products/2800841



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 8A SFB P - Thermomagnetic device circuit breaker

2800842

https://www.phoenixcontact.com/us/products/2800842



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 10A SFB P - Thermomagnetic device circuit breaker

2800843

https://www.phoenixcontact.com/us/products/2800843



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 12A SFB P - Thermomagnetic device circuit breaker

2800844

https://www.phoenixcontact.com/us/products/2800844



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 16A SFB P - Thermomagnetic device circuit breaker

2800845

https://www.phoenixcontact.com/us/products/2800845



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic SFB, 1 changeover contact, plug for base element.

CB TM1 0.5A M1 P - Thermomagnetic device circuit breaker

2800846

https://www.phoenixcontact.com/us/products/2800846



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB TM1 1A M1 P - Thermomagnetic device circuit breaker

2800847

https://www.phoenixcontact.com/us/products/2800847



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB TM1 2A M1 P - Thermomagnetic device circuit breaker

2800848

https://www.phoenixcontact.com/us/products/2800848



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB TM1 3A M1 P - Thermomagnetic device circuit breaker

2800849

https://www.phoenixcontact.com/us/products/2800849



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB TM1 4A M1 P - Thermomagnetic device circuit breaker

2800850

https://www.phoenixcontact.com/us/products/2800850



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB TM1 5A M1 P - Thermomagnetic device circuit breaker

2800851

https://www.phoenixcontact.com/us/products/2800851



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB TM1 6A M1 P - Thermomagnetic device circuit breaker

2800852

https://www.phoenixcontact.com/us/products/2800852



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM1 8A M1 P - Thermomagnetic device circuit breaker

2800853

https://www.phoenixcontact.com/us/products/2800853



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB TM1 10A M1 P - Thermomagnetic device circuit breaker

2800854

https://www.phoenixcontact.com/us/products/2800854



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM1 12A M1 P - Thermomagnetic device circuit breaker

2800855

https://www.phoenixcontact.com/us/products/2800855



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB TM1 16A M1 P - Thermomagnetic device circuit breaker

2800856

https://www.phoenixcontact.com/us/products/2800856



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic M1 (medium-blow), 1 changeover contact, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM1 0.5A F1 P - Thermomagnetic device circuit breaker

2800857

https://www.phoenixcontact.com/us/products/2800857



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM1 1A F1 P - Thermomagnetic device circuit breaker

2800858

https://www.phoenixcontact.com/us/products/2800858



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM1 2A F1 P - Thermomagnetic device circuit breaker

2800859

https://www.phoenixcontact.com/us/products/2800859



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM1 3A F1 P - Thermomagnetic device circuit breaker

2800860

https://www.phoenixcontact.com/us/products/2800860



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM1 4A F1 P - Thermomagnetic device circuit breaker

2800861

https://www.phoenixcontact.com/us/products/2800861



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM1 5A F1 P - Thermomagnetic device circuit breaker

2800862

https://www.phoenixcontact.com/us/products/2800862



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM1 6A F1 P - Thermomagnetic device circuit breaker

2800863

https://www.phoenixcontact.com/us/products/2800863



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM1 8A F1 P - Thermomagnetic device circuit breaker

2800864

https://www.phoenixcontact.com/us/products/2800864



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM1 10A F1 P - Thermomagnetic device circuit breaker

2800865

https://www.phoenixcontact.com/us/products/2800865



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM1 12A F1 P - Thermomagnetic device circuit breaker

2800866

https://www.phoenixcontact.com/us/products/2800866



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM1 16A F1 P - Thermomagnetic device circuit breaker

2800867

https://www.phoenixcontact.com/us/products/2800867



Thermomagnetic device circuit breaker, 1-pos., tripping characteristic F1 (fast-blow), 1 changeover contact, plug for base element.

CB TM2 0.5A SFB P - Thermomagnetic device circuit breaker

2800868

https://www.phoenixcontact.com/us/products/2800868



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB TM2 1A SFB P - Thermomagnetic device circuit breaker

2800869

https://www.phoenixcontact.com/us/products/2800869



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB TM2 2A SFB P - Thermomagnetic device circuit breaker

2800870

https://www.phoenixcontact.com/us/products/2800870



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB TM2 3A SFB P - Thermomagnetic device circuit breaker

2800871

https://www.phoenixcontact.com/us/products/2800871



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB TM2 4A SFB P - Thermomagnetic device circuit breaker

2800872

https://www.phoenixcontact.com/us/products/2800872



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 5A SFB P - Thermomagnetic device circuit breaker

2800873

https://www.phoenixcontact.com/us/products/2800873



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB TM2 6A SFB P - Thermomagnetic device circuit breaker

2800874

https://www.phoenixcontact.com/us/products/2800874



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB TM2 8A SFB P - Thermomagnetic device circuit breaker

2800875

https://www.phoenixcontact.com/us/products/2800875



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB TM2 10A SFB P - Thermomagnetic device circuit breaker

2800876

https://www.phoenixcontact.com/us/products/2800876



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 12A SFB P - Thermomagnetic device circuit breaker

2800877

https://www.phoenixcontact.com/us/products/2800877



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB TM2 16A SFB P - Thermomagnetic device circuit breaker

2800878

https://www.phoenixcontact.com/us/products/2800878



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic SFB, 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 0.5A M1 P - Thermomagnetic device circuit breaker

2800879

https://www.phoenixcontact.com/us/products/2800879



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB TM2 1A M1 P - Thermomagnetic device circuit breaker

2800880

https://www.phoenixcontact.com/us/products/2800880



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB TM2 2A M1 P - Thermomagnetic device circuit breaker

2800881

https://www.phoenixcontact.com/us/products/2800881



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB TM2 3A M1 P - Thermomagnetic device circuit breaker

2800882

https://www.phoenixcontact.com/us/products/2800882



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 4A M1 P - Thermomagnetic device circuit breaker

2800883

https://www.phoenixcontact.com/us/products/2800883



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB TM2 5A M1 P - Thermomagnetic device circuit breaker

2800884

https://www.phoenixcontact.com/us/products/2800884



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 6A M1 P - Thermomagnetic device circuit breaker

2800885

https://www.phoenixcontact.com/us/products/2800885



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB TM2 8A M1 P - Thermomagnetic device circuit breaker

2800886

https://www.phoenixcontact.com/us/products/2800886



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 10A M1 P - Thermomagnetic device circuit breaker

2800887

https://www.phoenixcontact.com/us/products/2800887



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB TM2 12A M1 P - Thermomagnetic device circuit breaker

2800888

https://www.phoenixcontact.com/us/products/2800888



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB TM2 16A M1 P - Thermomagnetic device circuit breaker

2800889

https://www.phoenixcontact.com/us/products/2800889



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic M1 (medium-blow), 2 changeover contacts, plug for base element.

CB TM2 0.5A F1 P - Thermomagnetic device circuit breaker

2800890

https://www.phoenixcontact.com/us/products/2800890



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 1A F1 P - Thermomagnetic device circuit breaker

2800891

https://www.phoenixcontact.com/us/products/2800891



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB TM2 2A F1 P - Thermomagnetic device circuit breaker

2800892

https://www.phoenixcontact.com/us/products/2800892



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB TM2 3A F1 P - Thermomagnetic device circuit breaker

2800893

https://www.phoenixcontact.com/us/products/2800893



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB TM2 4A F1 P - Thermomagnetic device circuit breaker

2800894

https://www.phoenixcontact.com/us/products/2800894



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 5A F1 P - Thermomagnetic device circuit breaker

2800895

https://www.phoenixcontact.com/us/products/2800895



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB TM2 6A F1 P - Thermomagnetic device circuit breaker

2800896

https://www.phoenixcontact.com/us/products/2800896



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB TM2 8A F1 P - Thermomagnetic device circuit breaker

2800897

https://www.phoenixcontact.com/us/products/2800897



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB TM2 10A F1 P - Thermomagnetic device circuit breaker

2800898

https://www.phoenixcontact.com/us/products/2800898



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB TM2 12A F1 P - Thermomagnetic device circuit breaker

2800899

https://www.phoenixcontact.com/us/products/2800899



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB TM2 16A F1 P - Thermomagnetic device circuit breaker

2800900

https://www.phoenixcontact.com/us/products/2800900



Thermomagnetic device circuit breaker, 2-pos., tripping characteristic F1 (fast-blow), 2 changeover contacts, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB E1 24DC/1A NO P - Electronic circuit breaker

2800901

https://www.phoenixcontact.com/us/products/2800901



Electronic circuit breaker, 1-pos., active current limitation, 1 N/O contact, plug for base element.

CB E1 24DC/2A NO P - Electronic circuit breaker

2800902

https://www.phoenixcontact.com/us/products/2800902



Electronic circuit breaker, 1-pos., active current limitation, 1 N/O contact, plug for base element.

CB E1 24DC/3A NO P - Electronic circuit breaker

2800903

https://www.phoenixcontact.com/us/products/2800903



Electronic circuit breaker, 1-pos., active current limitation, 1 N/O contact, plug for base element.

CB E1 24DC/4A NO P - Electronic circuit breaker

2800904

https://www.phoenixcontact.com/us/products/2800904



Electronic circuit breaker, 1-pos., active current limitation, 1 N/O contact, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB E1 24DC/6A NO P - Electronic circuit breaker

2800905

https://www.phoenixcontact.com/us/products/2800905



Electronic circuit breaker, 1-pos., active current limitation, 1 N/O contact, plug for base element.

CB E1 24DC/8A NO P - Electronic circuit breaker

2800906

https://www.phoenixcontact.com/us/products/2800906



Electronic circuit breaker, 1-pos., active current limitation, 1 N/O contact, plug for base element.

CB E1 24DC/10A NO P - Electronic circuit breaker

2800907

https://www.phoenixcontact.com/us/products/2800907



Electronic circuit breaker, 1-pos., active current limitation, 1 N/O contact, plug for base element.

CB E1 24DC/1A S-R P - Electronic circuit breaker

2800908

https://www.phoenixcontact.com/us/products/2800908



Electronic circuit breaker, 1-pos., active current limitation, status output and reset input, plug for base element.

CB E1 24DC/2A S-R P - Electronic circuit breaker

2800909

https://www.phoenixcontact.com/us/products/2800909



Electronic circuit breaker, 1-pos., active current limitation, status output and reset input, plug for base element.

CB E1 24DC/3A S-R P - Electronic circuit breaker

2800910

https://www.phoenixcontact.com/us/products/2800910



Electronic circuit breaker, 1-pos., active current limitation, status output and reset input, plug for base element.

CB E1 24DC/4A S-R P - Electronic circuit breaker

2800911

https://www.phoenixcontact.com/us/products/2800911



Electronic circuit breaker, 1-pos., active current limitation, status output and reset input, plug for base element.

CB E1 24DC/6A S-R P - Electronic circuit breaker

2800912

https://www.phoenixcontact.com/us/products/2800912



Electronic circuit breaker, 1-pos., active current limitation, status output and reset input, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB E1 24DC/8A S-R P - Electronic circuit breaker

2800913

https://www.phoenixcontact.com/us/products/2800913



Electronic circuit breaker, 1-pos., active current limitation, status output and reset input, plug for base element.

CB E1 24DC/10A S-R P - Electronic circuit breaker

2800914

https://www.phoenixcontact.com/us/products/2800914



Electronic circuit breaker, 1-pos., active current limitation, status output and reset input, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB E1 24DC/1A NC P - Electronic circuit breaker

2800915

https://www.phoenixcontact.com/us/products/2800915



Electronic circuit breaker, 1-pos., active current limitation, 1 N/C contact, plug for base element.

CB E1 24DC/2A NC P - Electronic circuit breaker

2800916

https://www.phoenixcontact.com/us/products/2800916



Electronic circuit breaker, 1-pos., active current limitation, 1 N/C contact, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB E1 24DC/3A NC P - Electronic circuit breaker

2800917

https://www.phoenixcontact.com/us/products/2800917



Electronic circuit breaker, 1-pos., active current limitation, 1 N/C contact, plug for base element.

CB E1 24DC/4A NC P - Electronic circuit breaker

2800918

https://www.phoenixcontact.com/us/products/2800918



Electronic circuit breaker, 1-pos., active current limitation, 1 N/C contact, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB E1 24DC/6A NC P - Electronic circuit breaker

2800919

https://www.phoenixcontact.com/us/products/2800919



Electronic circuit breaker, 1-pos., active current limitation, 1 N/C contact, plug for base element.

CB E1 24DC/1A S-C P - Electronic circuit breaker

2800922

https://www.phoenixcontact.com/us/products/2800922



Electronic circuit breaker, 1-pos., active current limitation, status output and control input, plug for base element.

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

CB E1 24DC/2A S-C P - Electronic circuit breaker

2800923

https://www.phoenixcontact.com/us/products/2800923



Electronic circuit breaker, 1-pos., active current limitation, status output and control input, plug for base element.

CB E1 24DC/3A S-C P - Electronic circuit breaker

2800924

https://www.phoenixcontact.com/us/products/2800924



Electronic circuit breaker, 1-pos., active current limitation, status output and control input, plug for base element.

CB E1 24DC/4A S-C P - Electronic circuit breaker

2800925

https://www.phoenixcontact.com/us/products/2800925



Electronic circuit breaker, 1-pos., active current limitation, status output and control input, plug for base element.

CB E1 24DC/6A S-C P - Electronic circuit breaker

2800926

https://www.phoenixcontact.com/us/products/2800926



Electronic circuit breaker, 1-pos., active current limitation, status output and control input, plug for base element.

CB E1 24DC/8A S-C P - Electronic circuit breaker

2800927

https://www.phoenixcontact.com/us/products/2800927



Electronic circuit breaker, 1-pos., active current limitation, status output and control input, plug for base element.

CB E1 24DC/10A S-C P - Electronic circuit breaker

2800928

https://www.phoenixcontact.com/us/products/2800928



Electronic circuit breaker, 1-pos., active current limitation, status output and control input, plug for base element.

Accessories

CB S-BE - Base element

2905067

https://www.phoenixcontact.com/us/products/2905067

PC - Coding star

3040588

https://www.phoenixcontact.com/us/products/3040588



Coding star, 4-section, depth: 6 mm, width: 3 mm, height: 3 mm, color: red

Phoenix Contact 2024 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com