



Radial Metallized Polyester RC Network for Transient Suppression

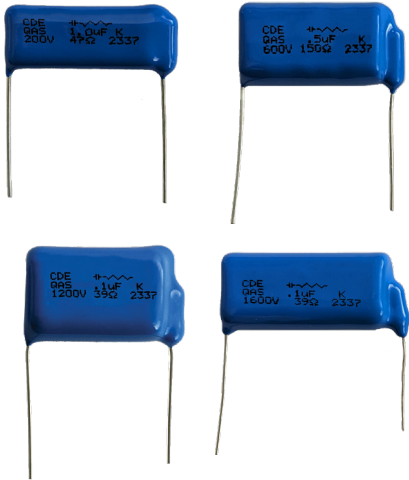

Type QAS will extend the operating life of electronic and electro-mechanical devices by reducing and/or eliminating the electrical arcing, noise, and EMF. These electrical conditions often cause early failures in relays, switch contacts, and solid-state components such as SCRs and TRIACs.

Outline Dimensions



Highlights

- Noise and arc suppression
- RC Snubber Network
- Relay contact protection
- Noise reduction on controllers and drives
- EMI/RFI reduction
- dv/dt suppression
- Coated with flame retardant epoxy

Specifications

Capacitance Range	0.10 μ F, 0.25 μ F, 0.50 μ F, 1.0 μ F
Capacitance Tolerance	\pm 10%
Rated Voltage	200 Vdc/125 Vac, 60 Hz thru 1600 Vdc/660 Vac, 60 Hz
Resistor Tolerance	\pm 10%
Resistor Values	22, 39, 47, 100, 150, 220, 330, 680 ohms
Operating Temperature Range	-55 $^{\circ}$ C to +85 $^{\circ}$ C at full rated voltage
Construction	Metallized polyester in series with an anti-surge resistor
Dielectric Withstand Voltage	1.6 x DC rated voltage @ +25 $^{\circ}$ C
DC Life Test	125% of rated voltage for a period of 500 hours at 85 $^{\circ}$ C with capacitance change \leq 5% and DF \leq original limits
Long Term Stability	The capacitance shall not change more than 2% when stored at ambient temperature and humidity for a period of two years or less.

Regulatory Information

Part Numbering System

QAS	104	K	600	D	022
Type	Capacitance	Capacitance Tolerance	Voltage Code	Case Type	Resistance
	104 = 0.1 μ F	K = \pm 10%	200 = 200 Vdc		022 = 22 Ω
	254 = 0.25 μ F		600 = 600 Vdc		150 = 150 Ω
	504 = 0.5 μ F		1200 = 1200 Vdc		
	105 = 1.0 μ F		1600 = 1600 Vdc		

Radial Metallized Polyester RC Network for Transient Suppression

Ratings

Catalog	Cap	Resistor		L Max		T Max		H Max		S	Ød _{cap}		Ød _{res}		
Part Number	(µF)	Ohms	Watts	Inches	(mm)	Inches	(mm)	Inches	(mm)	Inches	(mm)	Inches	(mm)	Inches	(mm)
200 Vdc / 125Vac															
QAS104K200D150	0.1	150	1/2	1.08	(27.5)	0.46	(11.8)	0.66	(16.7)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS104K200D680	0.1	680	1/2	1.08	(27.5)	0.46	(11.8)	0.66	(16.7)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS504K200D022	0.5	22	1/2	1.08	(27.5)	0.37	(9.5)	0.64	(16.3)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS504K200D047	0.5	47	1/2	1.08	(27.5)	0.37	(9.5)	0.64	(16.3)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS504K200D220	0.5	220	1/2	1.08	(27.5)	0.37	(9.5)	0.64	(16.3)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS105K200D022	1	22	1/2	1.45	(36.8)	0.39	(10.0)	0.67	(17.0)	1.20	(30.5)	0.031	(0.8)	0.025	(0.635)
QAS105K200D047	1	47	1/2	1.45	(36.8)	0.39	(10.0)	0.67	(17.0)	1.20	(30.5)	0.031	(0.8)	0.025	(0.635)
600 Vdc / 250Vac															
QAS104K600D022	0.1	22	1/2	1.08	(27.5)	0.39	(10.0)	0.67	(17.0)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS104K600D047	0.1	47	1/2	1.08	(27.5)	0.39	(10.0)	0.67	(17.0)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS104K600D150	0.1	150	1/2	1.08	(27.5)	0.39	(10.0)	0.67	(17.0)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS104K600D220	0.1	220	1/2	1.08	(27.5)	0.39	(10.0)	0.67	(17.0)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS104K600D330	0.1	330	1/2	1.08	(27.5)	0.39	(10.0)	0.67	(17.0)	0.82	(20.8)	0.031	(0.8)	0.025	(0.635)
QAS254K600D022	0.25	22	1/2	1.45	(36.8)	0.42	(10.6)	0.75	(19.0)	1.20	(30.5)	0.031	(0.8)	0.025	(0.635)
QAS254K600D047	0.25	47	1/2	1.45	(36.8)	0.42	(10.6)	0.75	(19.0)	1.20	(30.5)	0.031	(0.8)	0.025	(0.635)
QAS254K600D150	0.25	150	1/2	1.45	(36.8)	0.42	(10.6)	0.75	(19.0)	1.20	(30.5)	0.031	(0.8)	0.025	(0.635)
QAS504K600D022	0.5	22	1/2	1.45	(36.8)	0.59	(15.0)	0.92	(23.4)	1.20	(30.5)	0.031	(0.8)	0.025	(0.635)
QAS504K600D047	0.5	47	1/2	1.45	(36.8)	0.59	(15.0)	0.92	(23.4)	1.20	(30.5)	0.031	(0.8)	0.025	(0.635)
QAS504K600D150	0.5	150	1/2	1.45	(36.8)	0.59	(15.0)	0.92	(23.4)	1.20	(30.5)	0.031	(0.8)	0.025	(0.635)
1200 Vdc / 480Vac															
QAS104K122D039	0.1	39	2	1.60	(40.6)	0.64	(16.3)	1.04	(26.4)	1.29	(32.7)	0.031	(0.8)	0.031	(0.8)
1600 Vdc / 660Vac															
QAS104K162D039	0.1	39	2	2.18	(55.4)	0.54	(13.7)	1.00	(25.4)	1.80	(45.7)	0.031	(0.8)	0.031	(0.8)

Type QAS, Arc Suppressor/Snubber Network

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.