


RY836AI

High Performance GPS & Glonass / GPS & BeiDou
Parallel mode antenna module with Compass, Gyroscope,
Accelerometer, Pressure Sensor

Datasheet

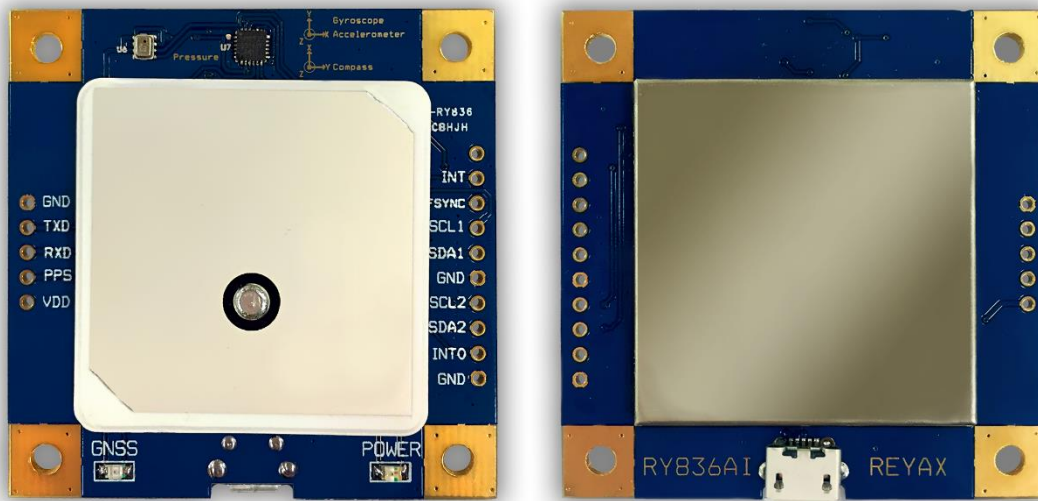


PRODUCT DESCRIPTION

The REYAX RY836AI GNSS receiver module with embedded GPS/Glonass/BeiDou antenna enables high performance navigation in the most stringent applications and solid fix even in harsh GPS/Glonass/BeiDou visibility environments.


FEATURES

- NEO-M8N GNSS(GPS, GLONASS, Galileo, BeiDou, QZSS and SBAS) engine
- Bosch BMP280 Pressure Sensor
- InvenSense MPU-9250 Gyroscope, Accelerometer & Magnetometer Motion Tracking device
- Embedded GPS/Glonass/BeiDou Antenna
- Enhanced GNSS Low Noise Amplifier
- RTC battery backup
- USB 2.0 interface connect to computer easily
- Max. 10Hz Navigation update rate
- Position accuracy 2.0 m CEP
- EMI Shielding Shell
- GNSS & POWER LED Indicator

PART

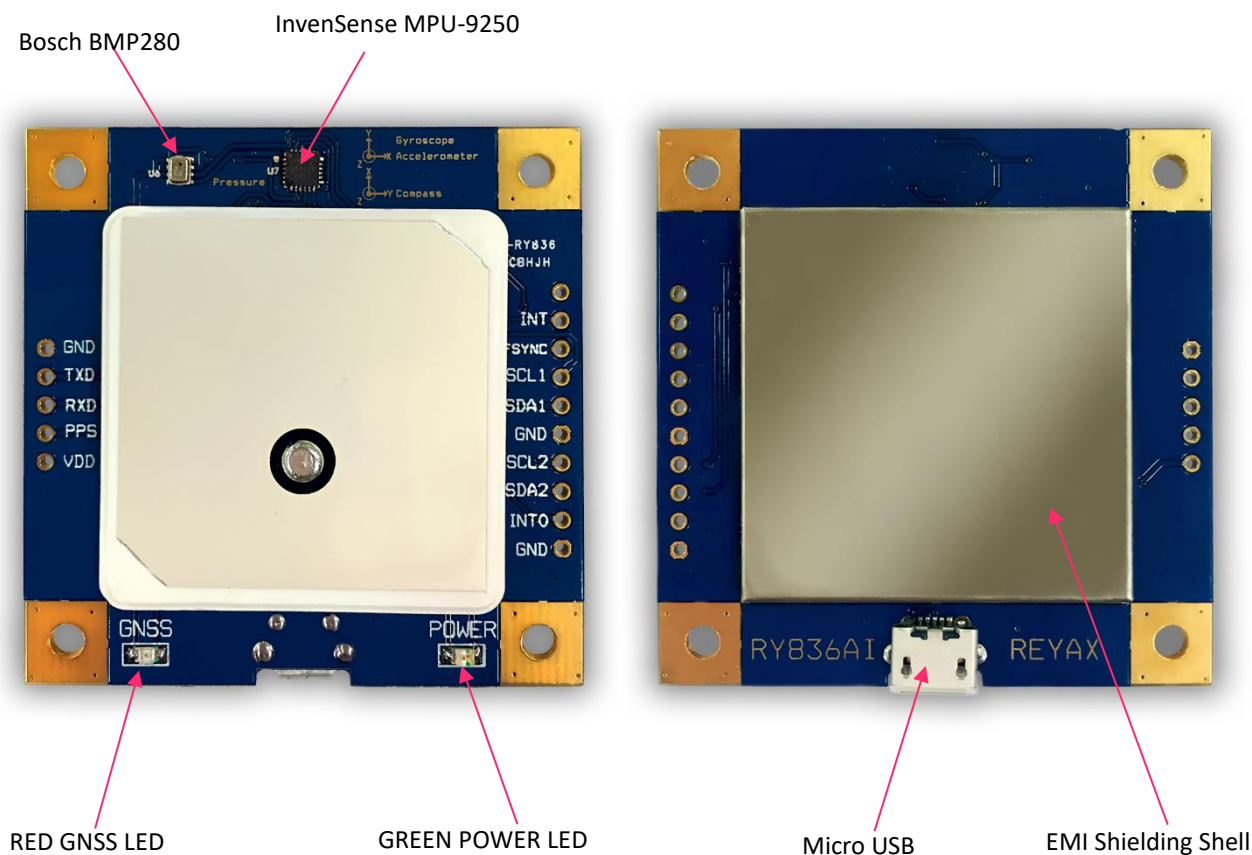


APPLICATION SCHEMATIC

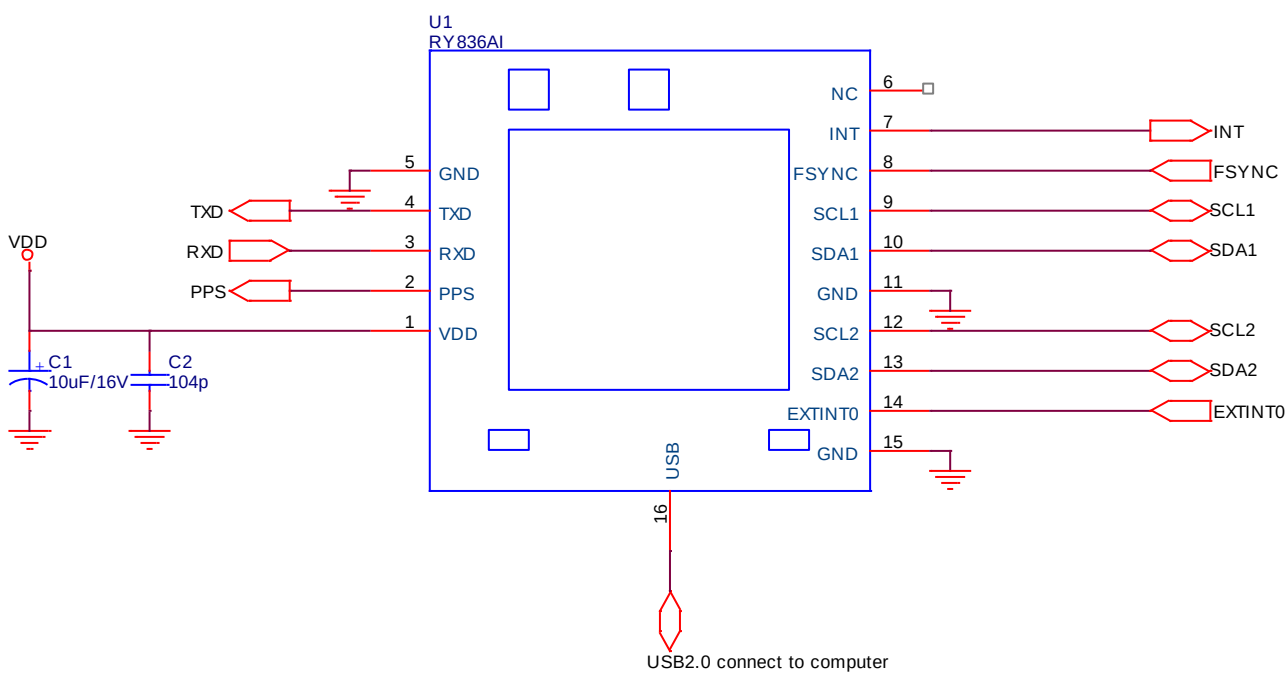

PIN DESCRIPTION

Pin	Name	I/O	Condition
1	VDD	I	Supply voltage
2	PPS	O	NEO-M8N
			Time pulse
3	RXD	I	NEO-M8N
			Serial Port
4	TXD	O	NEO-M8N
			Serial Port
5	GND	-	Ground
6	NC	-	
7	INT	O	InvenSense MPU-9250
			Interrupt digital output (totem pole or open-drain)
8	FSYNC	I	InvenSense MPU-9250
			Frame synchronization digital input. Connect to GND if unused.
9	SCL1	I/O	Bosch BMP280, InvenSense MPU-9250 I2C interface, +3.3V 2.2K Ω pull up.
10	SDA1	I/O	Bosch BMP280, InvenSense MPU-6050 I2C interface, +3.3V 2.2K Ω pull up.
11	GND	-	Ground
12	SCA2	I/O	NEO-M8N
			DDC Data
13	SCL2	I/O	NEO-M8N
			DDC Clock
14	EXTINT0	I	NEO-M8N
			External Interrupt Pin Leave open if not used.
15	GND	-	Ground

BLOCK DIAGRAM

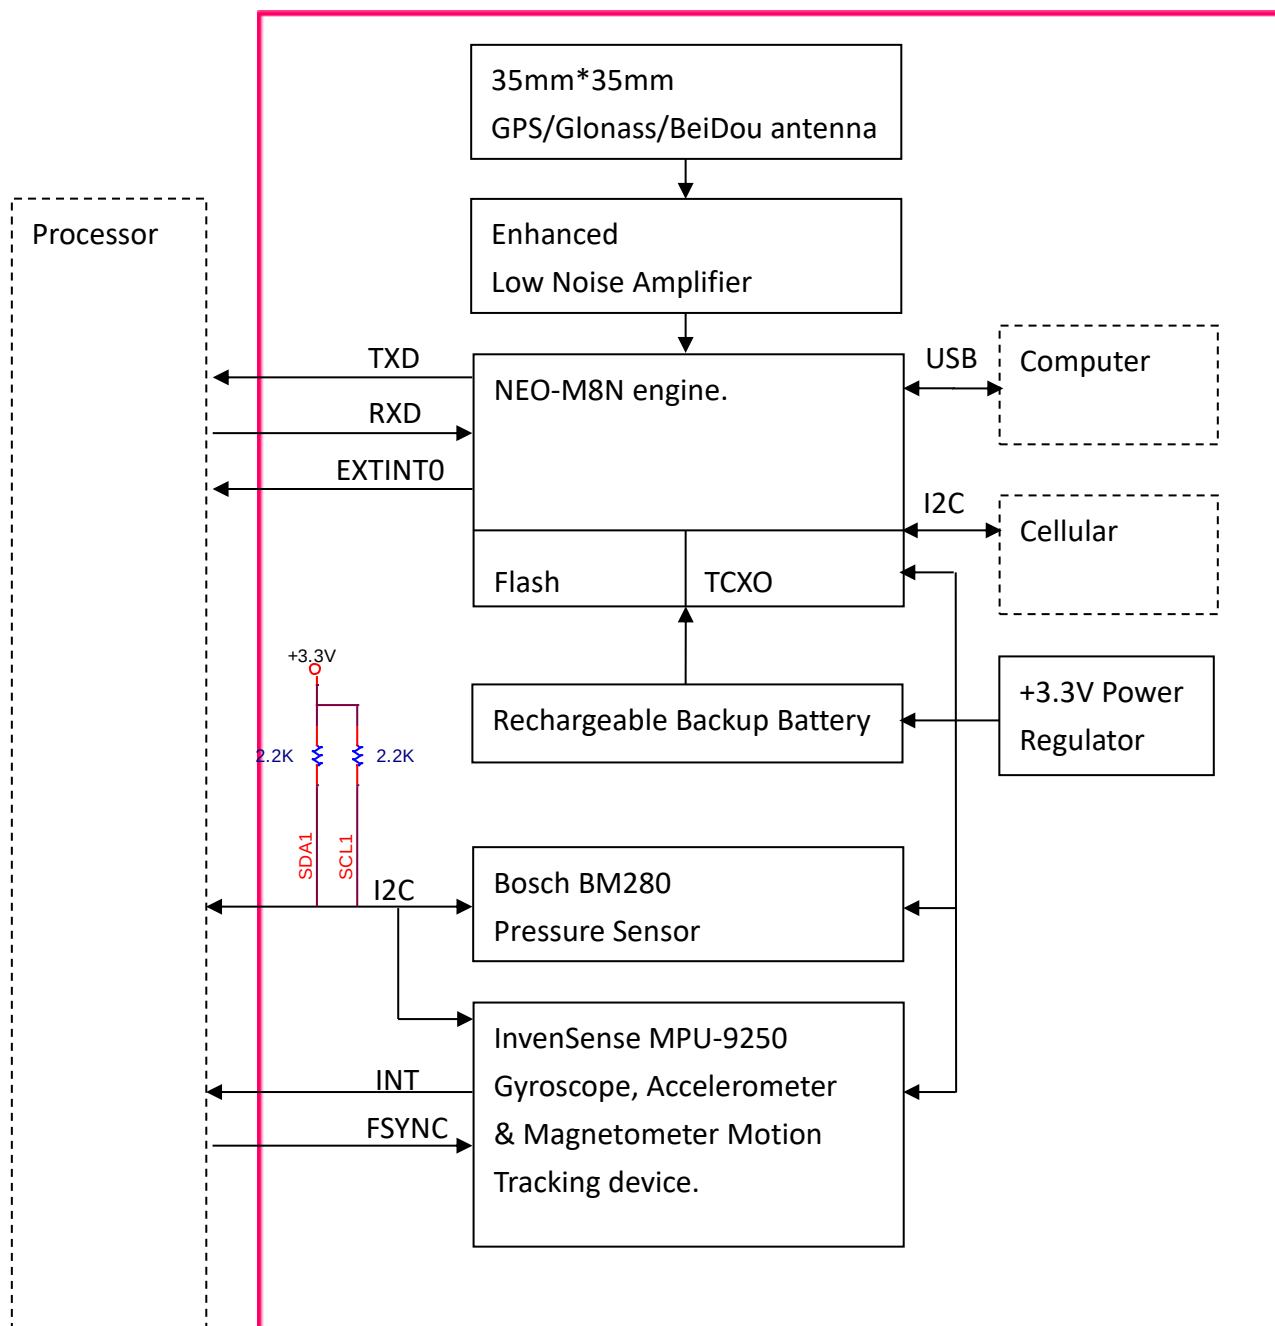


SPECIFICATION

Item	Min.	Typical	Max.	Unit	Condition
Operation Voltage	3.9		5.5	V	VDD
Current		42.32		mA	NEO-M8N 34mA GNSS LNA 4.1mA Bosch BMP280 0.72mA InvenSense MPU-9250 3.5mA
TXD/RXD DIO voltage		3.3		V	
Baud Rate		9600		bps	NMEA, Configurable
USB Interface					V2.0
Logic I/O Voltage		3.3		V	
GNSS Center Frequency		1561.098 1575.42 1602.5625		MHz	BeiDou GPS Glonass
Navigation update rate		1	10	Hz	Configurable
Accuracy		2		M	CEP
Cold starts		26		Sec.	
Aided starts		2		Sec.	
Hot starts		1.5		Sec.	
Tracking Sensitivity		-167		dBm	
Cold starts Sensitivity		-148		dBm	
Hot starts Sensitivity		-156		dBm	
Operating Temperature	-40	25	+85	°C	
Antenna					35mm*35mm Embedded
Dimensions					50mm*50mm*7.6mm
Weight		27		g	

*Other sensors specification, please refer to the original datasheet.

CONFIGURATION HARDWARE TOOLS

Please plug a micro USB cable to the RY836AI.

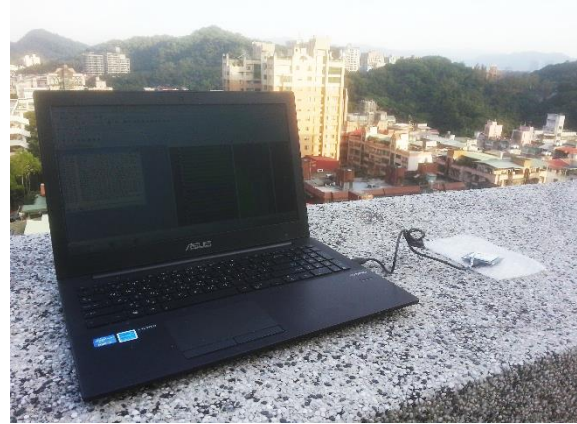


CONFIGURATION SOFTWARE TOOLS

Please download the u-blox u-center <https://www.u-blox.com/en/product/u-center-windows>


and Access Port <http://www.sudt.com>

Please execute the u-center and run the messages-UBX-CFG.


- Set to receive GPS&Glonass (default)

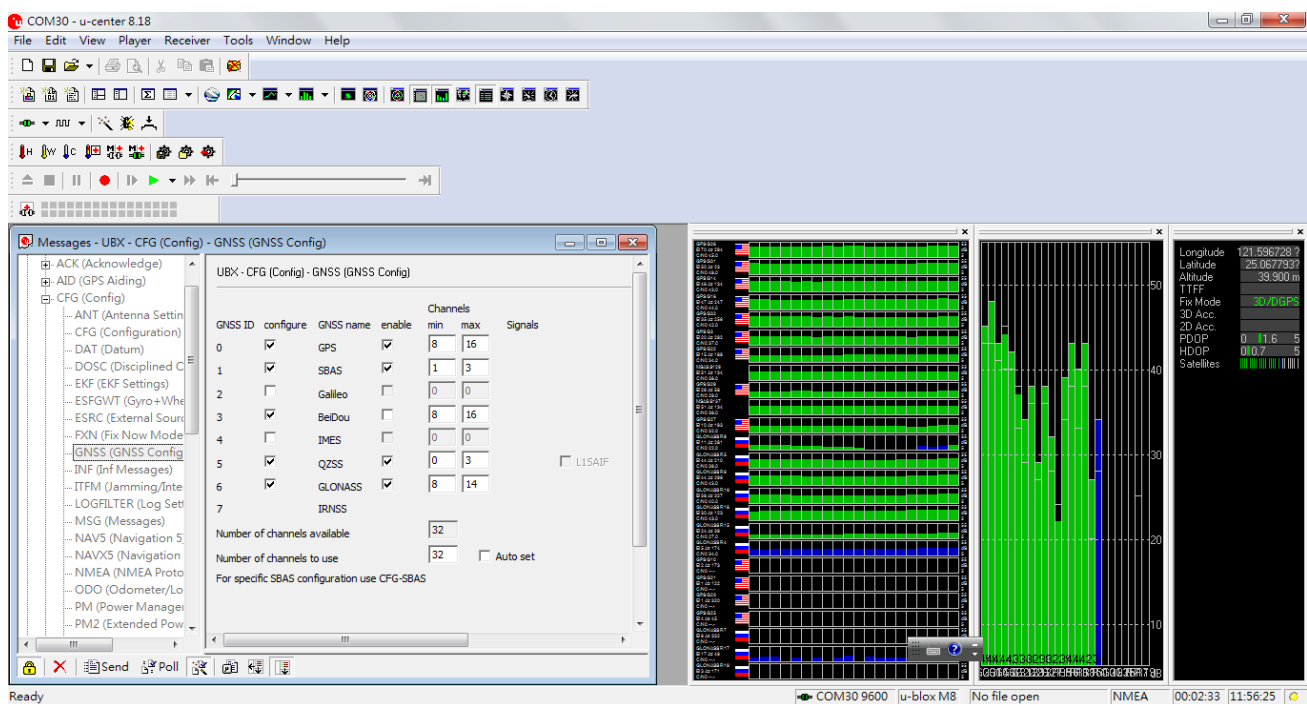


- Set to receive GPS & BeiDou

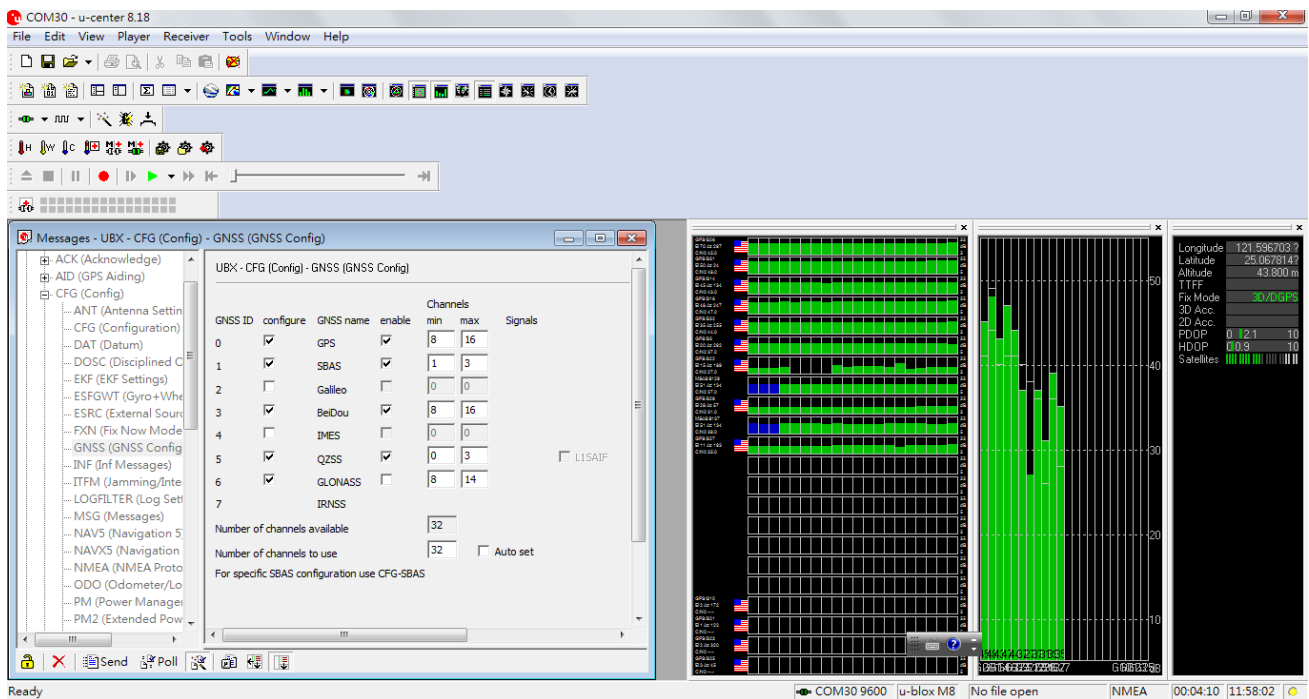


- Enable Message

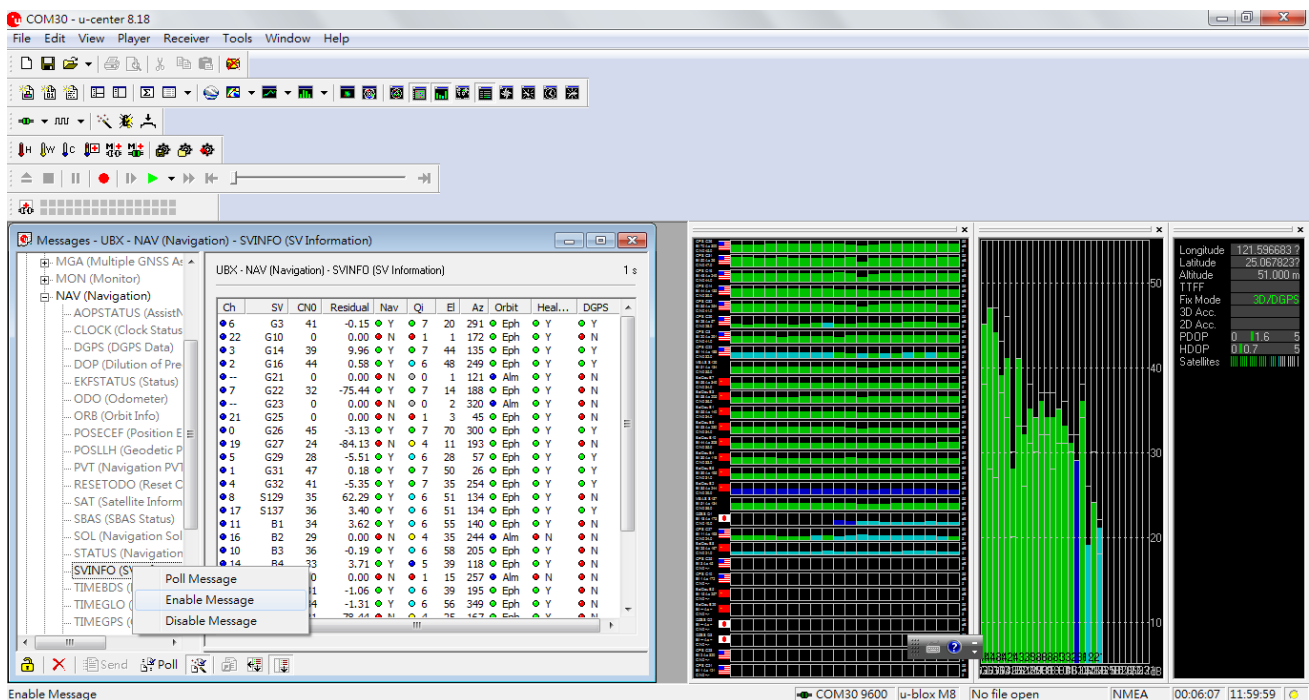


- Set Baud rate (9600 default)

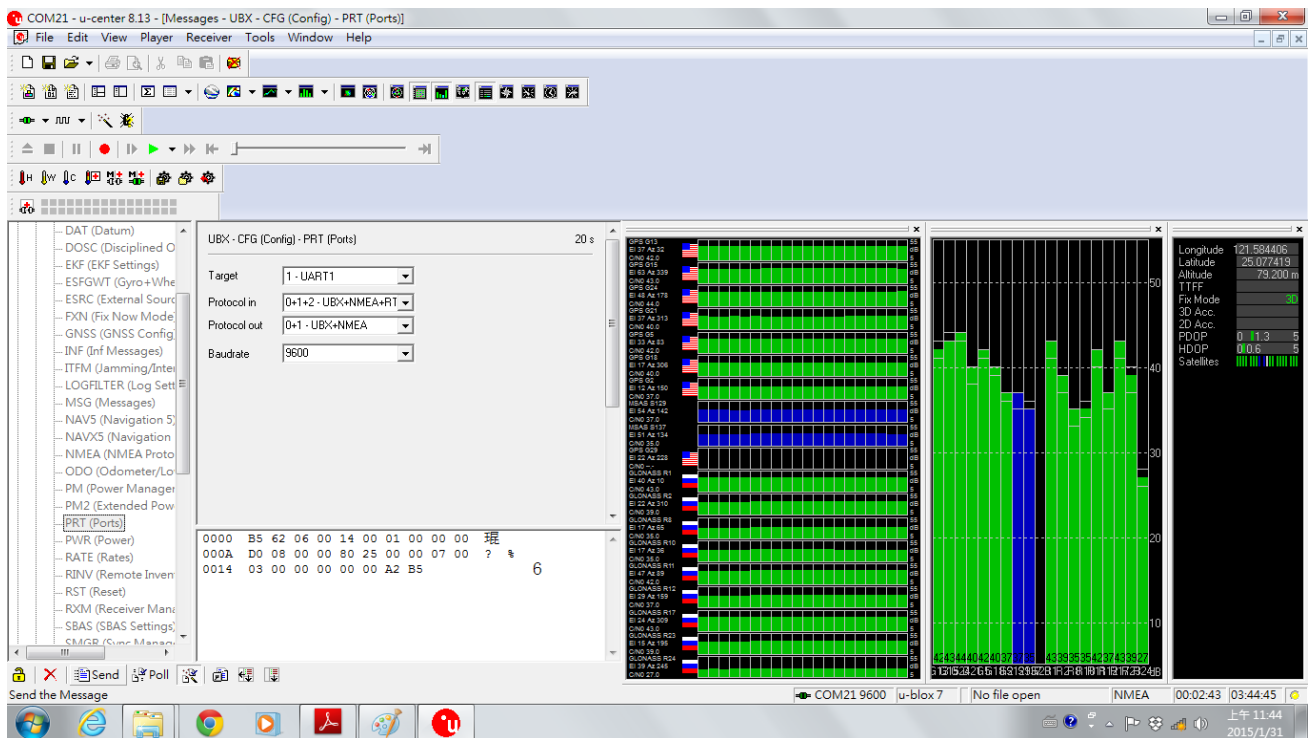



- Set Navigation update rate (1Hz default)

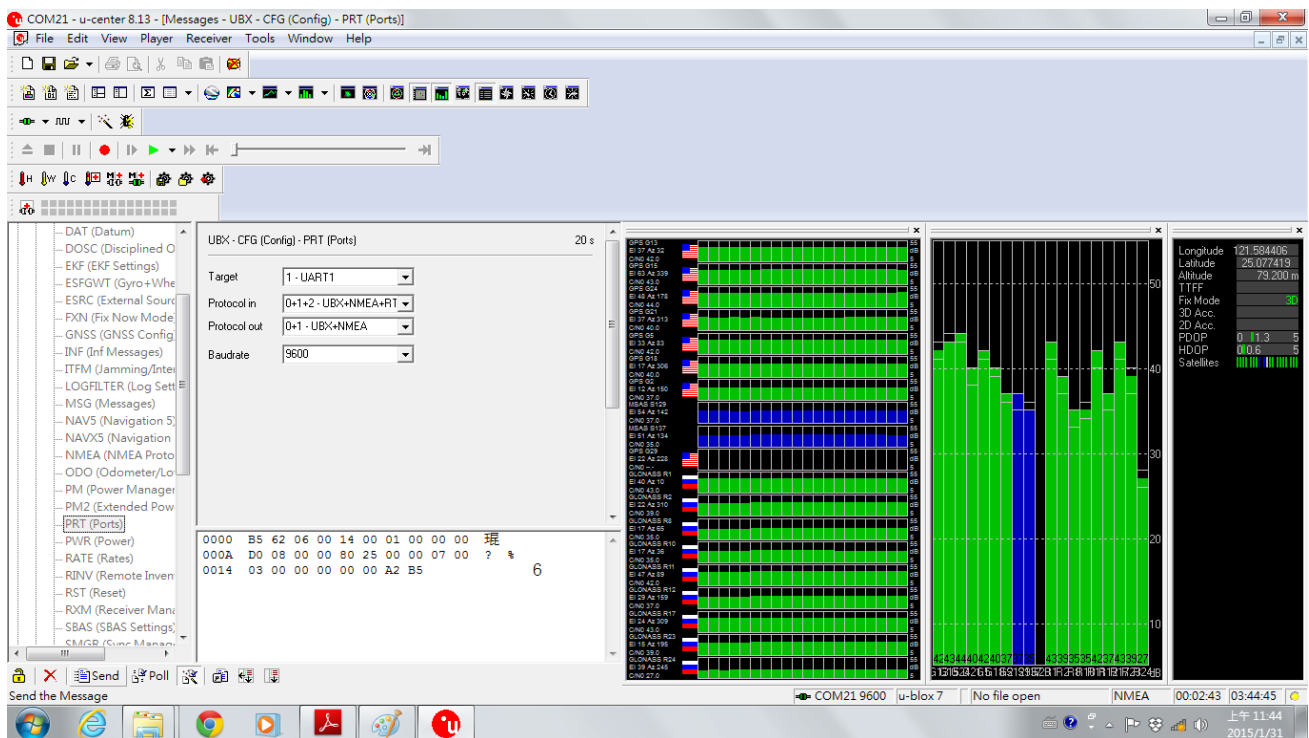


- Save Configuration in flash

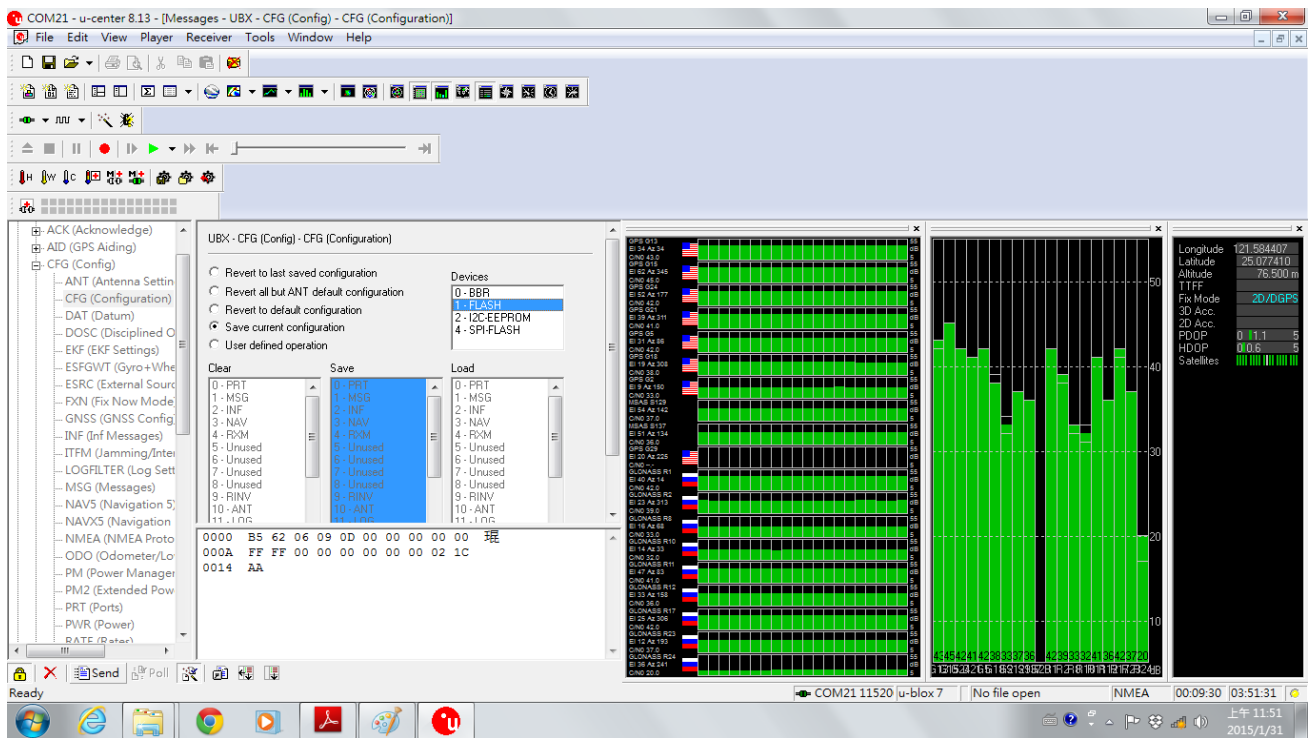

DIMENSIONS

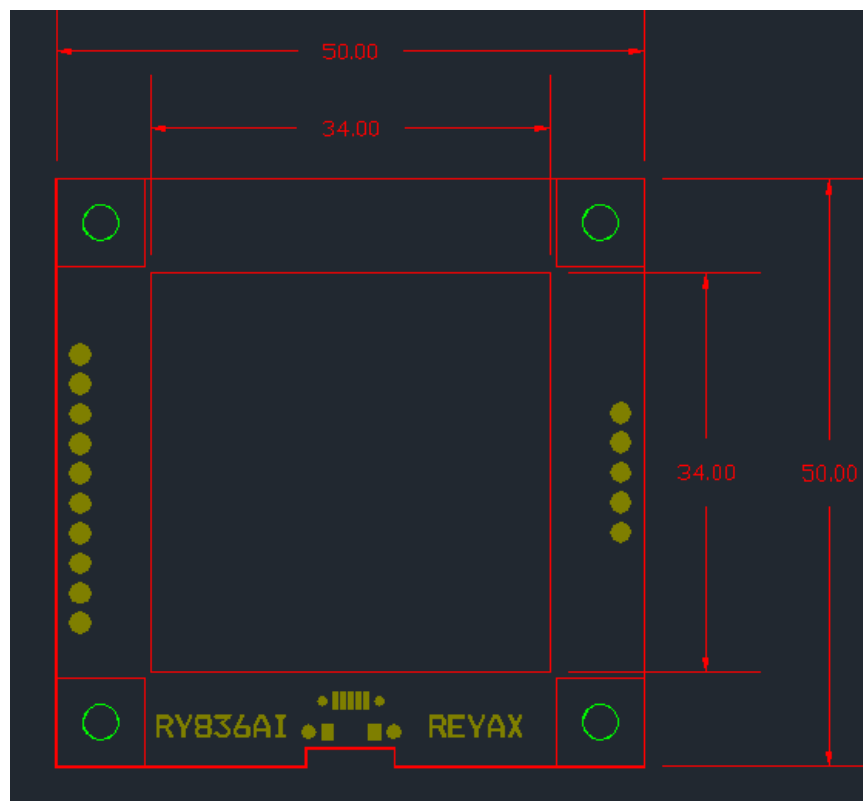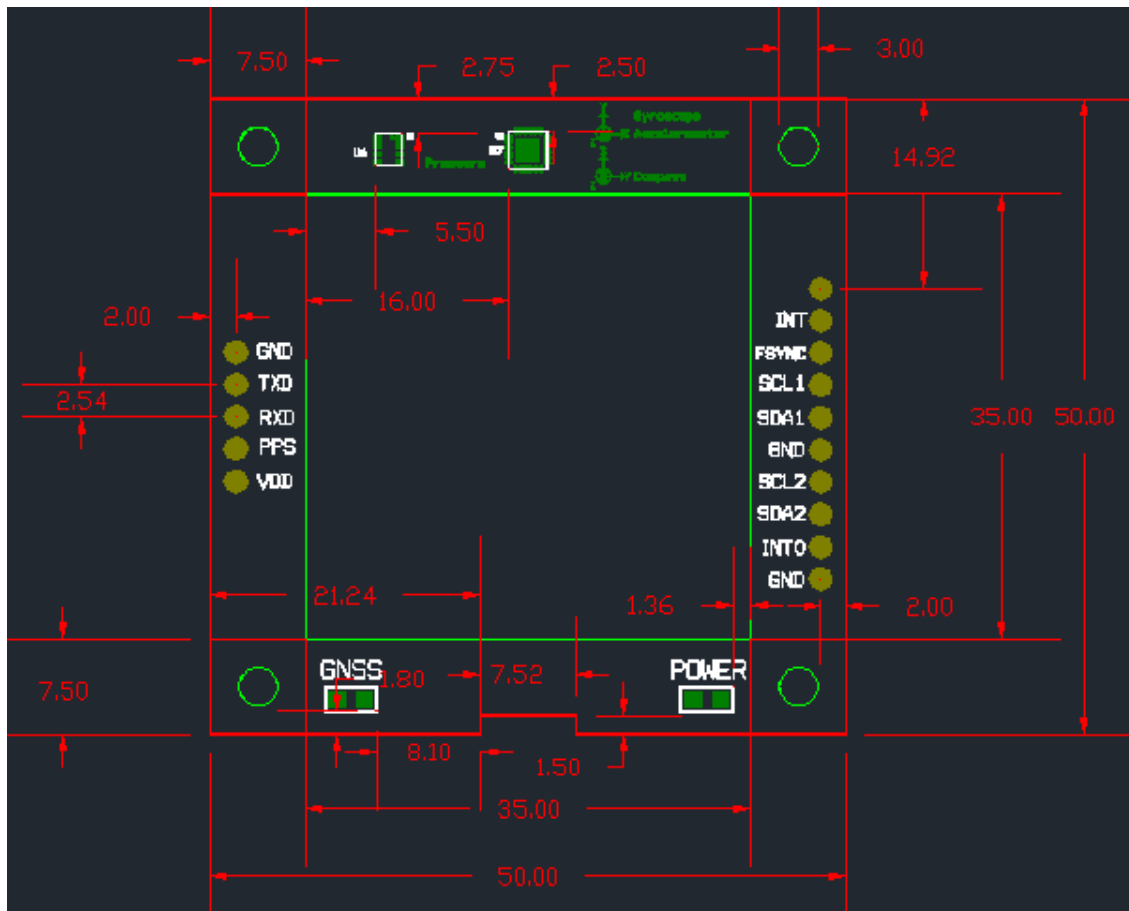

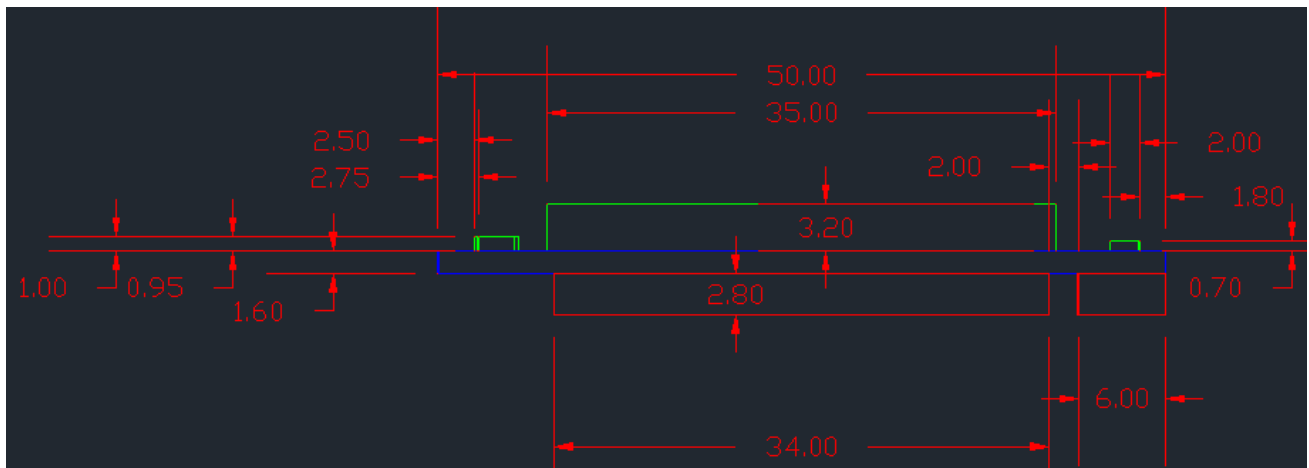


unit: mm

USAGE CONSIDERATIONS

Please fix the USB cable.

If the force direction is unsuitable, it will damage the micro USB connector easily.

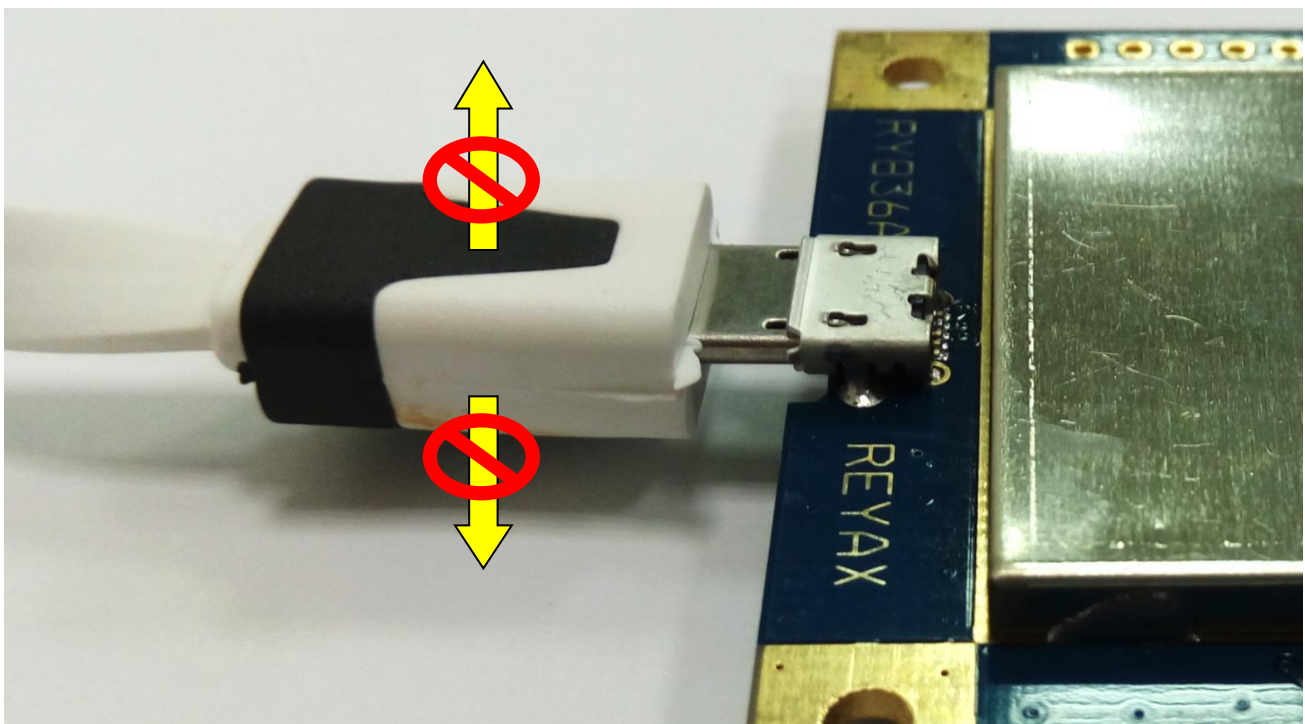

REYAX
TECHNOLOGY CORPORATION, LTD

E-mail: sales@reyax.com

Website: <http://reyax.com>