

## SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length



## RF Cable Assemblies Technical Data Sheet


PE3277-12

**Configuration**

- Connector 1: SHV Plug
- Connector 2: BNC Male
- Cable Type: RG58

**Features**

- Max Frequency 300 MHz
- 65.9% Phase Velocity
- PVC (NC) Jacket

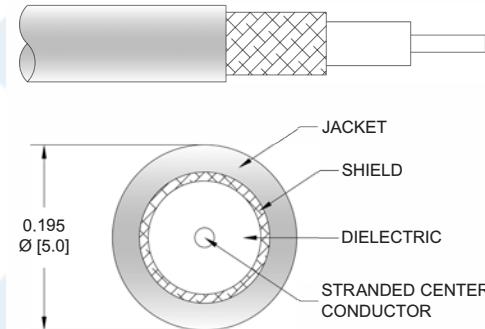**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3277-12 SHV plug to BNC male 12 inch cable using RG58 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SHV to BNC cable assembly has a plug to male gender configuration with 50 ohm flexible RG58 coax. The PE3277-12 SHV plug to BNC male cable assembly operates to 300 MHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length PE3277-12](#)



## SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length

## RF Cable Assemblies Technical Data Sheet

PE3277-12

**Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		300	MHz
VSWR			1.4:1	
Velocity of Propagation		65.9		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]
Operating Voltage (AC)			500	Vrms

**Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	250	300				MHz
Insertion Loss (Typ.)	0.18	0.2				dB

**Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of  $0.1 * \text{SQRT}(F\text{GHz})$  dB per connector.

**Mechanical Specifications**
**Cable Assembly**

Length*	12 in [304.8 mm]
Weight	0.082 lbs [37.19 g]

**Cable**

Cable Type	RG58
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Tin
Dielectric Type	PE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	PVC (NC), Black
Jacket Diameter	0.195 in [4.95 mm]

One Time Minimum Bend Radius	0.98 in [24.89 mm]
Repeated Minimum Bend Radius	1.96 in [49.78 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length PE3277-12](#)



## SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length

### RF Cable Assemblies Technical Data Sheet

**PE3277-12**

#### Connectors

Description	Connector 1	Connector 2
Type	SHV Plug	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 $\mu$ in minimum	30 $\mu$ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 $\mu$ in minimum	100 $\mu$ in minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 $\mu$ in minimum	100 $\mu$ in minimum

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +80 deg C

#### Compliance Certifications (see product page for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length PE3277-12](#)




## SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length

### RF Cable Assemblies Technical Data Sheet

PE3277-12

#### How to Order

Part Number Configuration:

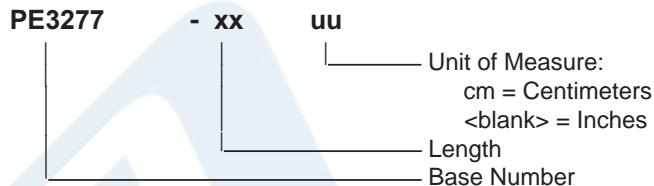

Example: PE3277-12 = 12 inches long cable  
PE3277-100cm = 100 cm long cable

SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length PE3277-12](#)


URL: <https://www.pasternack.com/shv-plug-to-bAc-male-cable-12-iAch-leAgh-usiAg-rg58-pe3277-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3277-12 CAD Drawing

SHV Plug to BNC Male Cable Using RG58 Coax In 12 Inch Length

Standard Lengths	
-12	12"
-24	24"
-36	36"
-48	48"
-60	60"
-XXX Custom Length in Inches	

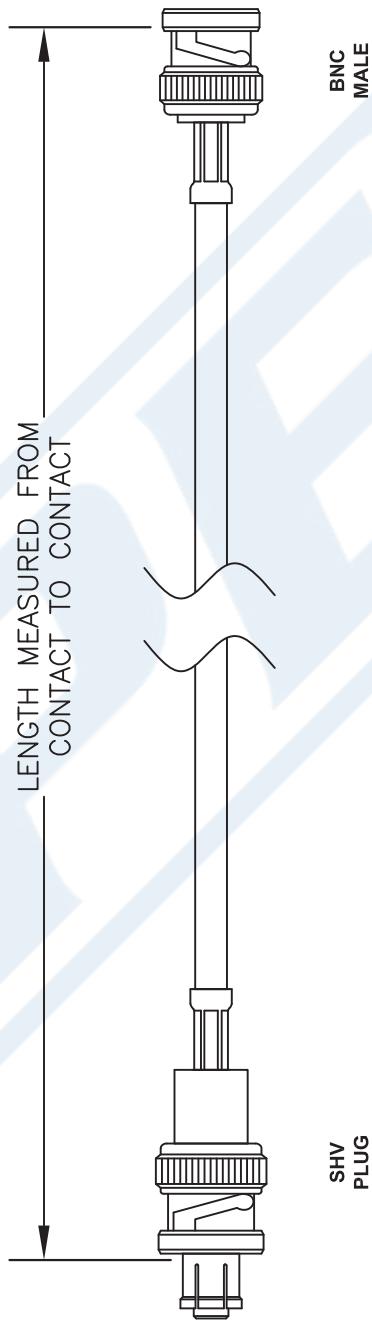

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR 3/8", WHICHEVER IS GREATER.

<b>PE PASTERNACK®</b> Pasternack Enterprises, Inc. P.O. Box 16759   Irvine   CA   92623 Phone: (949) 261-1920   Fax: (949) 261-7451 Website: <a href="http://www.pasternack.com">www.pasternack.com</a>   E-Mail: <a href="mailto:sales@pasternack.com">sales@pasternack.com</a>	DWG TITLE	PE3277-XX	
	REV. -	FSCM NO. 53919	CAD FILE 100407 SCALE N/A SIZE A 127