


AI-2304-TF-LW120-R 23 x 17mm Indicator

3541 Stop Eight Road • Dayton, Ohio 45414


Product Overview

- 23 x 17mm housing, 20-28 VDC self-drive indicator
- 86 dBA minimum output (24 VDC @ 10 cm)
- 400 Hz continuous tone is easily heard by those with hearing loss
- Durable ABS enclosure with integrated mounting tabs
- 120mm 26 AWG UL1007 lead wires



REACH

COMPLIANCE

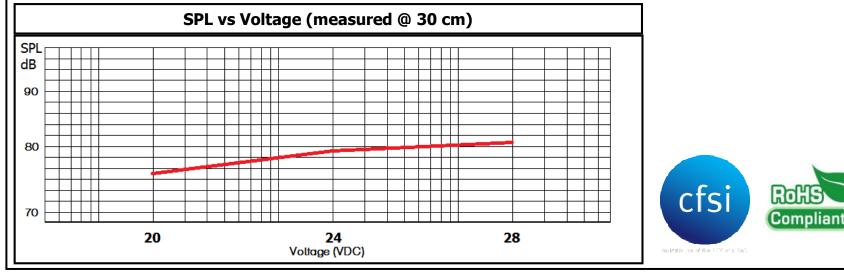



PUI Audio Inc. engages in continuous product improvement. All specifications are subject to change without notice. www.puiaudio.com. Copyright © 2015. Last Revised 12/15.



AI-2304-TF-LW120-R 23 x 17mm Indicator

Mechanical and Environment Testing	
Test Description	Test Condition
High Temperature	70°C (±2°C) with random humidity for 96 hours
Low Temperature	-30°C (±2°C) with random humidity for 96 hours
Humidity	40°C (±2°C) with 90% to 95% relative humidity for 96 hours
Vibration	0.75 mm movement modulated at 10-55 Hz for 3 hours
Drop Test	100 cm free fall onto wood board, 10 cycles
Temperature Cycle Test	-20°C to 70°C, 100 cycles
After tests part shall rest for 2 hours. Parts are then tested for clean, pure tones	



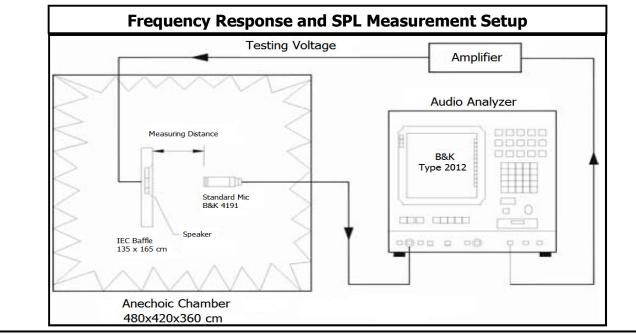

PUI Audio Inc. engages in continuous product improvement. All specifications are subject to change without notice. www.puiaudio.com. Copyright © 2015. Last Revised 12/15.

