

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0640060200](#)
Status: **Active**
Overview: [Application Tooling](#)
Description: Manual Arbor Press, SC Power Connector

Documents:

[RoHS Certificate of Compliance \(PDF\)](#)


General

Product Family	Application Tooling
Series	207125
Function	Insulation Displacement (IDT)
Geographic Area	Global
Level of Automation	Manual
More Detailed Tech Information	applicationtooling@molex.com
Overview	Application Tooling
Product Name	N/A
Tool Type	Arbor Press
UPC	822348127054
Warranty Disclaimer	CAUTION: Molex tooling crimp specifications are valid only when used with Molex terminals and tooling manufactured by Molex and sold by Molex or authorized distributors ("Molex Tooling"). When using tooling other than Molex Tooling with Molex specific connector systems listed in our ATS documents, the Molex tooling qualification does not apply and the responsibility for full qualification of the connector system is that of the customer. Molex accepts no liability for connector performance or tooling support where tooling other than Molex Tooling is used or where Molex Tooling is modified.

Material Info

Reference - Drawing Numbers

Application Tooling Documents [ATS-640060200-001](#)

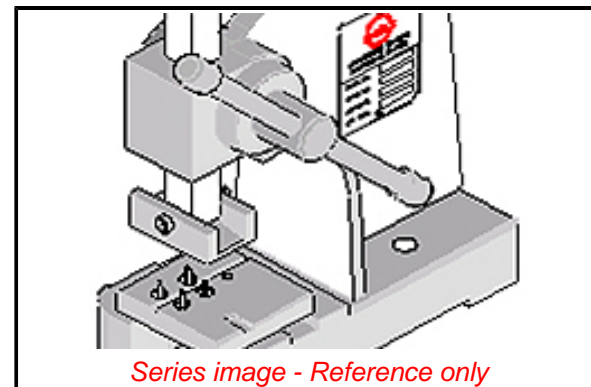

Series image - Reference only

EU ELV

Not Reviewed

EU RoHS

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

Search Parts in this Series

[207125 Series](#)

Application Tooling | **FAQ**
Description | **Product #**

Self-Contained Power Connector for Solid Nonmetallic Sheathed Cable, 12-14 AWG	190451000
Self-Contained Power Connector for Solid Nonmetallic Sheathed Cable, 12-14 AWG	194011000
Self-Contained Tap Splice Connector for Solid Nonmetallic Sheathed Cable, 12-14 AWG	194021000
Self-Contained Power Connector for 2 Circuit Round Cable with Ground, 14 AWG, Insulation Diameter 15.24mm	194030011

Self-Contained Power Connector for Stranded Nonmetallic Sheathed Cable, 12 AWG	<u>194031010</u>
Self-Contained Power Connector for Stranded Nonmetallic Sheathed Cable, 14-16 AWG	<u>194031011</u>
Self-Contained Power Connector for Solid or Stranded Nonmetallic Sheathed Cable, 10 AWG	<u>194031300</u>
Self-Contained Power Connector for 2 Circuit Round Cable with Ground, 14 AWG, Insulation Diameter 8.64-11.18mm	<u>194031310</u>
Self-Contained Power Connector for 2 Circuit Round Cable with Ground, 12 AWG, Insulation Diameter 8.64-11.18mm	<u>194210001</u>
Self-Contained Power Connector for 2 Circuit Round Cable with Ground, 12 AWG, Insulation Diameter 15.24mm	<u>194210002</u>

This document was generated on 07/31/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION