



REVISION				
EC NO.	DATE	REV.	DESCRIPTION	CHANGER
CY11-6493	2011/04/13	G	CHANGE CABLE	ZLLI
CY15-5216	2014/08/26	H	CHANGE CABLE	LUCY

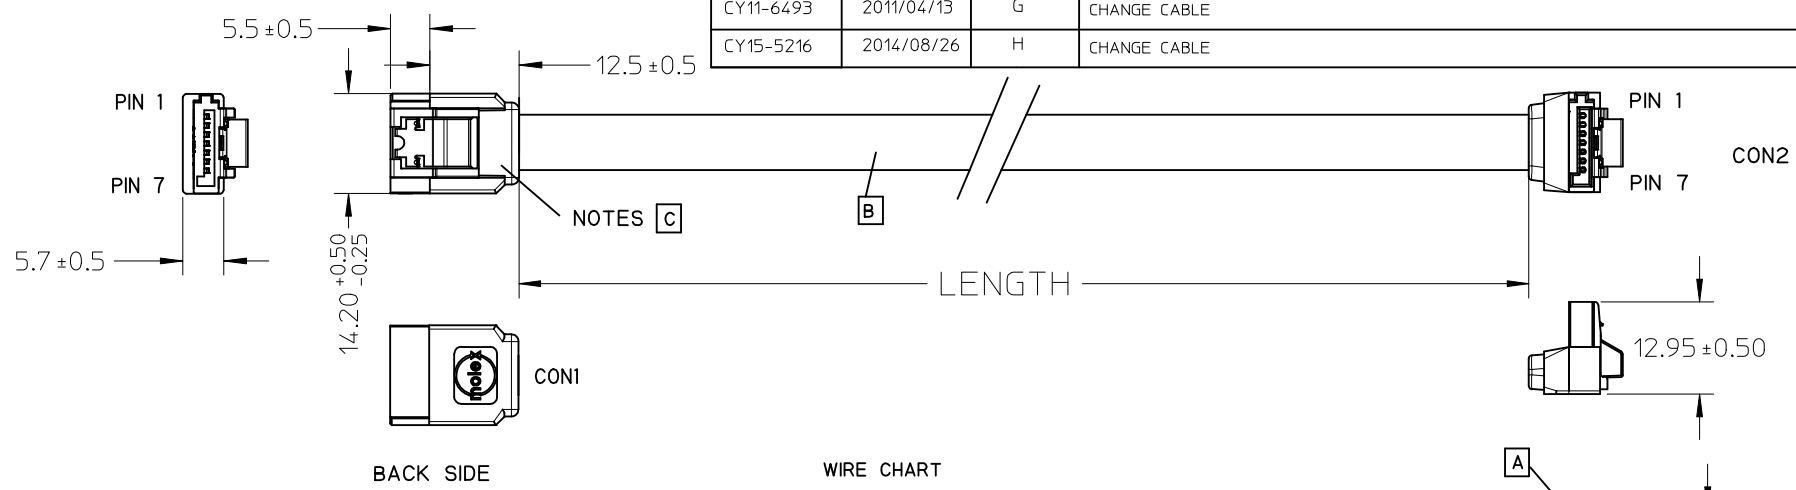

NOTE:

1. OUTER MOLD WITH BLACK PVC RESIN
INNER MOLD WITH PE RESIN
ELECTRICAL PERFORMANCE:
2. DIELECTRONIC STRENGTH:500V DC/0.01S
3. INSULATION RESISTANCE:100M OHMS MIN.
4. CONDUCTIVE RESISTOR: 2 OHMS MAX.
5. THIS PRODUCT MECHANICAL AND ELECTRICAL PERFORMANCE
REFER TO SATA INDUSTRIAL STANDARD.

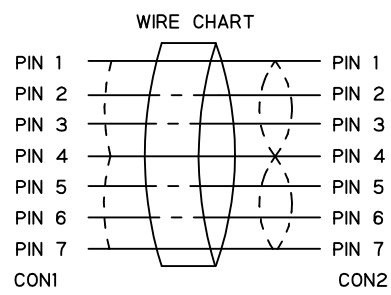

685610017	1000+/-20	40.0+/-0.8	S-ATA LATCHING STRAIGHT TO R/A CABLE. RED
685610016	500+/-10	20.0+/-0.4	S-ATA LATCHING STRAIGHT TO R/A CABLE. RED
MOLEX P/N	LENGTH (mm)	LENGTH (inch)	DESCRIPTION

C	S-ATA STRAIGHT CONN.		1
B	2PX26AWG:SHLD:PVC:RD:2.2X7.6MM:SATA 1.0	SEE TABLE	1
A	S-ATA R/A CONN.		1
ITEM	DESCRIPTION	L	QTY.

ENTER DESCRIPTION		EC NO: CPG2015-1374		DRWN: JXIA004		2014/09/13		CHKD: LUCY		2014/09/13		APPR: FNIE		2014/09/15		DESCRIPTION					
H		REV		QUALITY SYMBOLS		=0		=0		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION			
										mm		INCH		DRAWN BY		DATE		TITLE			
										4 PLACES		± ---		± ---		GX YANG		04/08/10		S-ATA STRAIGHT LATCHING TO R/A LATCHING SIGNAL CBL RED,0.5M,1.0M	
										3 PLACES		± ---		± ---		CHECKED BY		DATE			
										2 PLACES		± ---		± ---		TEDDY		04/08/10			
										1 PLACE		± ---		± ---		APPROVED BY		DATE			
										ANGULAR		± ---°		BORON		04/08/10		MOLEX INCORPORATED			
										DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		685610016/7		DOCUMENT NO.		SD-68561-002		SHEET NO.	
												SIZE		A 4		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				1 OF 1	