EV3432-L-00A

High-Efficiency, SYNC, BOOST Converter with Programmable Current Limit EV Board

DESCRIPTION

EV3432-L-00A Evaluation Board is designed to demonstrate the capability of MP3432. The MP3432 is a 600kHz fixed frequency, wide input range, highly integrated boost converter. It starts from an input voltage as low as 2.7V, and supports up to 30W load power from 1-cell battery.

MP3432 adopts constant-off-time (COT) control topology providing fast transient response. One MODE pin supports mode selection of PSM, FCCM and USM in light load condition. And the integrated low-side and high-side MOSFET simplify the design and save BOM cost.

The MP3432 features with programmable switching peak current limit provides accurate over load protection. And it also features with programmable input UVLO and over temperature protection.

The MP3432 is available in a 13-pin 3mmx4mm QFN package.

Electrical Specification

Parameter	Symbol	Value	Units
Input Voltage	V_{IN}	3-8.4	V
Switching Current Limit	I_{sw_LIMIT}	14	A
Output Voltage	V_{OUT}	9	V
Output Current	I_{OUT}	3.5	A

FEATURES

- 2.7V-to-13V Startup Voltage
- 0.8V-to-13V Operation Voltage
- Up to 16V Output Voltage
- Support 30W Average Power Load and 40W Peak Power Load from 3.3V
- Programmable Switching Peak Current Limit
- Integrated 6.5mΩ & 10mΩ Power MOSFET
- >95% Efficiency for 3.6V VIN to 9V/3A
- Selectable PSM, >23kHz USM, and FCCM Mode in Light Load Condition
- Auto Pass-Through Function in PSM Mode when VIN>VOUT
- 600kHz Fixed Switching Frequency
- Adaptive COT for Fast Transient Response
- External Soft Start and Compensation Pin
- Programmable UVLO and Hysteresis
- 150°C Over Temperature Protection
- Available in 3x4mm QFN-13 Package

APPLICATIONS

- Notebook
- Bluetooth Speaker
- Portable POS System
- Quick Charger Power Bank

All MPS parts are lead-free, halogen free, and adhere to the RoHS directive. For MPS green status, please visit MPS website under Quality Assurance. “MPS” and “The Future of Analog IC Technology” are Registered Trademarks of Monolithic Power Systems, Inc.

EV3432-L-00A EVALUATION BOARD




(L x W x H) 6.35cm x 6.35cm x 0.6cm

Board Number	MPS IC Number
EV3432-L-00A	MP3432GL


Efficiency vs. Load Current

PSM

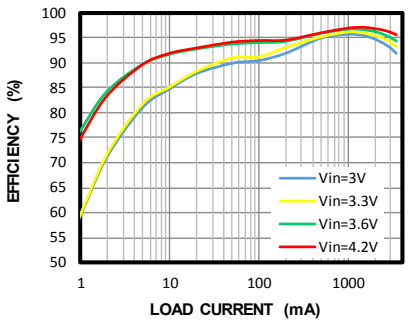

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.

EVALUATION BOARD SCHEMATIC

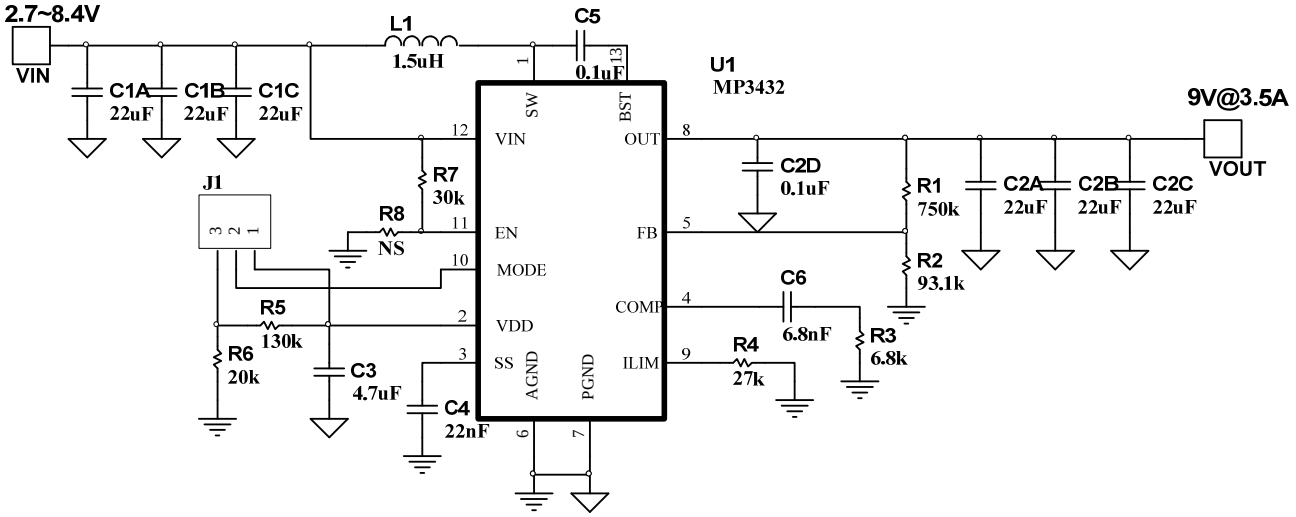

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.

EV3432-L-00A BILL OF MATERIALS


Qty	Ref	Value	Description	Package	Manufacturer	Part Number
6	C1A, C1B, C1C, C2A, C2B, C2C	22μF	Ceramic Cap,25V,X5R	1210	MuRata	GRM32ER61E226KE15L
2	C2D,C5	0.1μF	Ceramic Cap,25V,X7R	0603	MuRata	GRM188R71E104KA01D
1	C3	4.7μF	Ceramic Cap,6.3V,X5R	0603	MuRata	GRM188R71J475KA01D
1	C4	22nF	Ceramic Cap,16V,X7R	0603	MuRata	GRM188R71C223KA01D
1	C6	6.8nF	Ceramic Cap,50V,X7R	0603	MuRata	GRM188R71H682KA01D
1	R1	750k	Film Res,1%	0603	ROYAL	RL0603FR-07750KL
1	R2	93.1k	Film Res,1%	0603	ROYAL	RL0603FR-0793K1L
1	R3	6.8k	Film Res,1%	0603	ROYAL	RL0603FR-076K8L
1	R4	27k	Film Res,1%	0603	ROYAL	RL0603FR-0727KL
1	R5	130k	Film Res,1%	0603	ROYAL	RL0603FR-07130KL
1	R6	20k	Film Res,1%	0603	ROYAL	RL0603FR-0720KL
1	R7	30k	Film Res,1%	0603	ROYAL	RL0603FR-0730KL
0	R8	NC				
1	L1	1.5μH	I_{RMS}=19A, R_{DC}=3.3mΩ	11.5x10mm	Sumida	104CDMCCDS-1R5MC-ND
1	J1	Jumper	Short Jumper, 2.54mm			Jumper
1	U1	MP3432	Boost converter	QFN 3X4mm	MPS	MP3432GL

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.


EVB TEST RESULTS

V_{IN} = 3.3V, V_{OUT}= 9V, L=1.5µH, R_{ILIM}=27kΩ, I_{OUT}= 3.5A, PSM, T_A = 25°C, unless otherwise noted.


Efficiency vs. Load Current
PSM

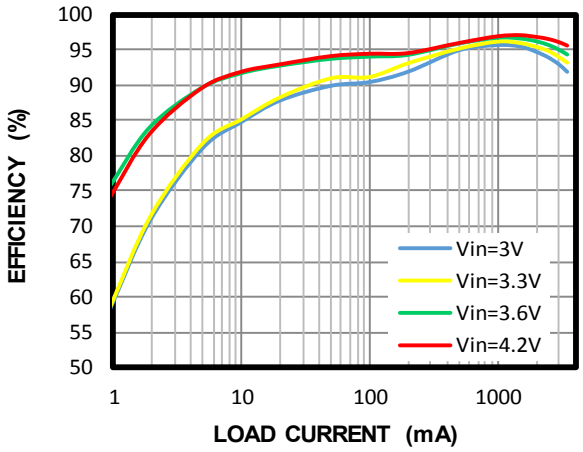


Efficiency vs. Load Current
USM

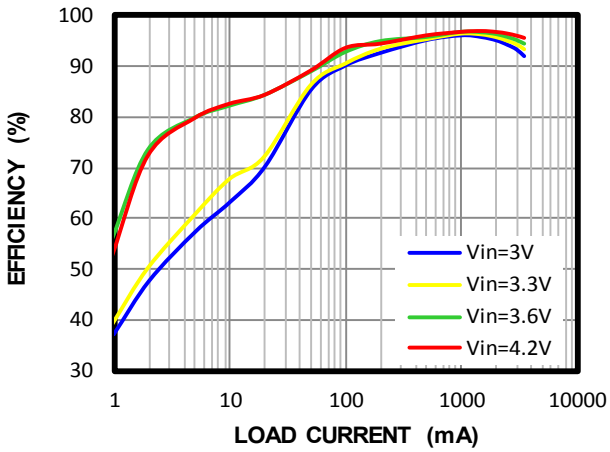


Load Regulation
PSM

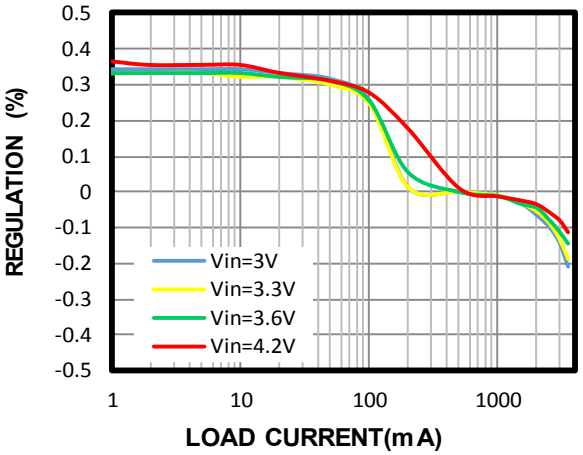


Load Regulation
USM

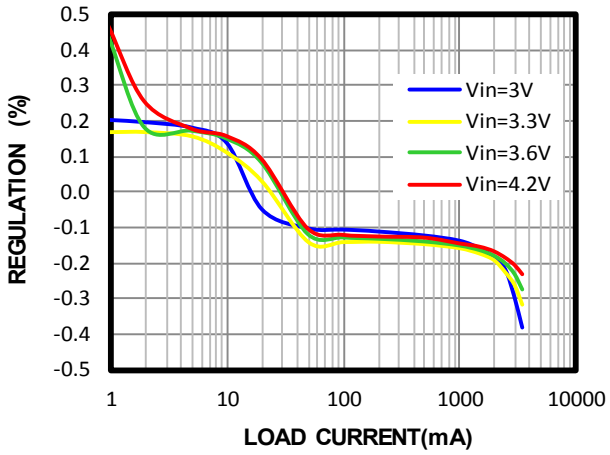

Line Regulation
PSM

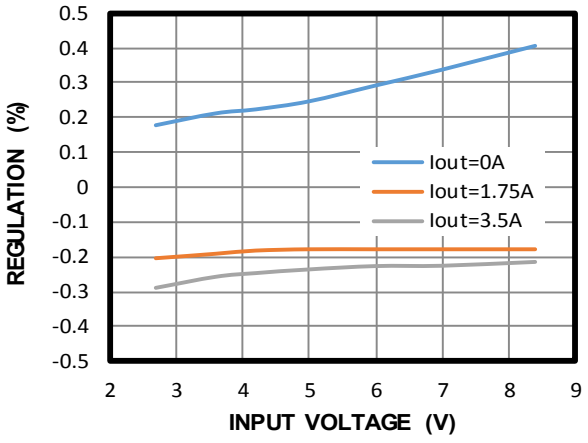

Line Regulation
USM

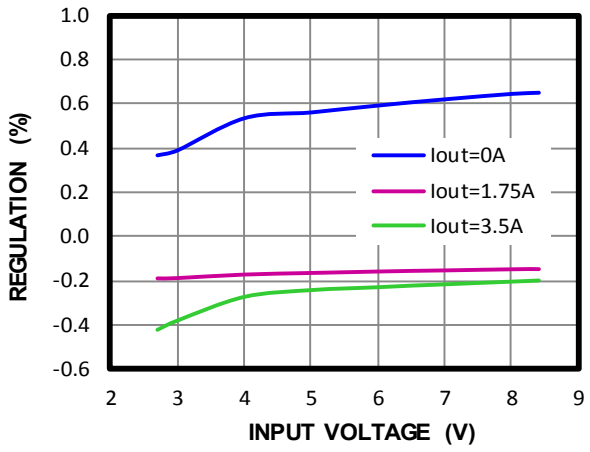


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*


V_{IN} = 3.3V, V_{OUT}= 9V, L=1.5µH, R_{ILIM}=27kΩ, I_{OUT}= 3.5A, PSM, T_A = 25°C, unless otherwise noted.

Body Plot

I_{OUT}=3.5A

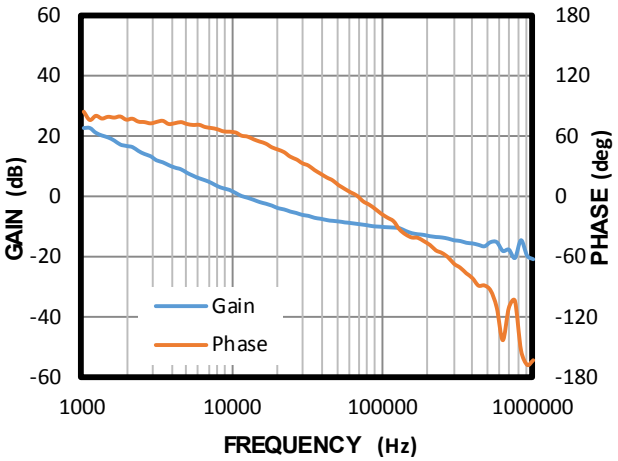

Case Temperature Rising

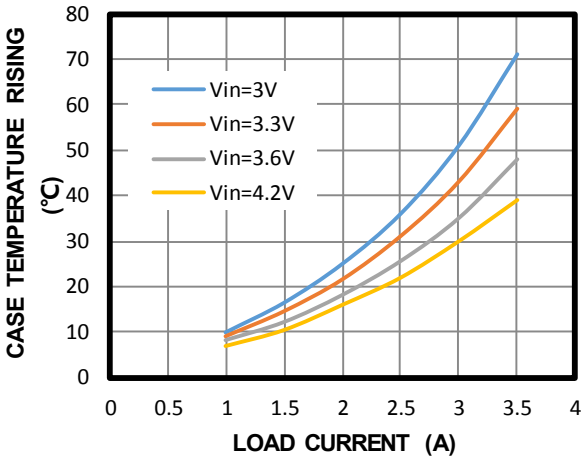


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.


EVB TEST RESULTS *(continued)*

V_{IN} = 3.3V, V_{OUT}= 9V, L=1.5µH, R_{ILIM}=27kΩ, I_{OUT}= 3.5A, PSM, T_A = 25°C, unless otherwise noted.


Steady State
I_{OUT}=0A, USM

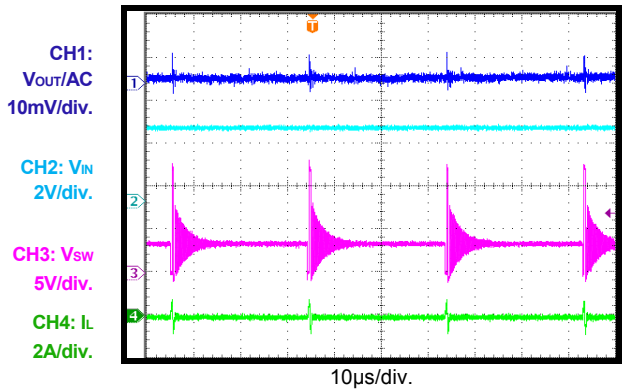


Steady State
I_{OUT}=0A, PSM

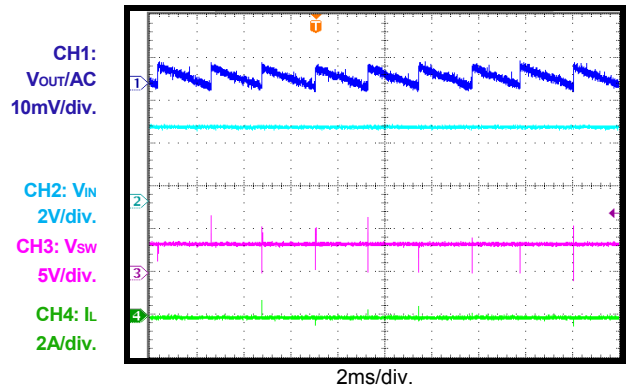


Steady State
I_{OUT}=0A, FCCM

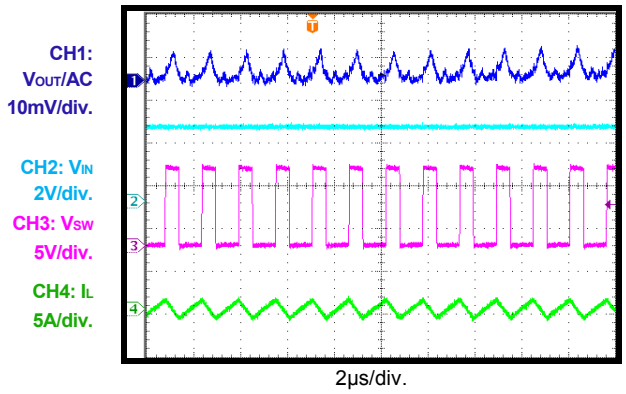


Steady State
I_{OUT}=3.5A

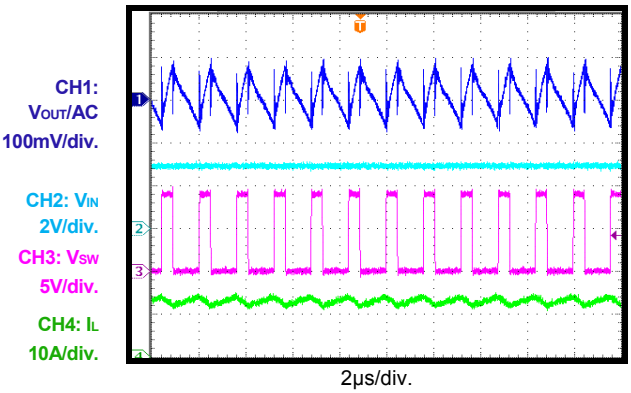

VIN Start-Up
I_{OUT}=0A

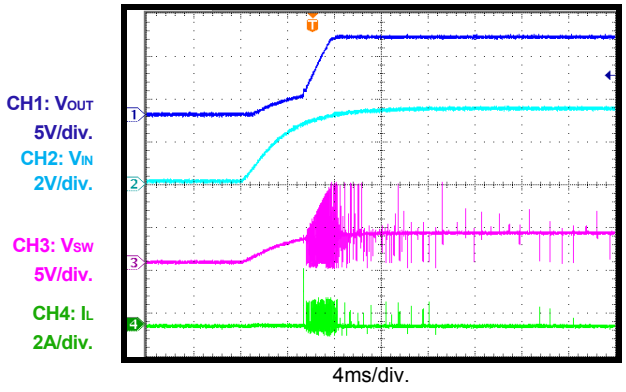

VIN Start-Up
I_{OUT}=3.5A

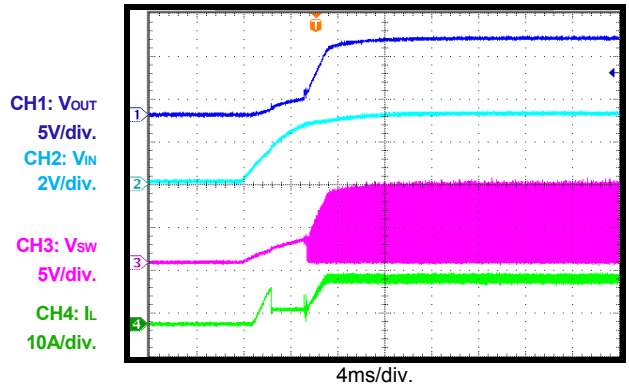


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.


EVB TEST RESULTS *(continued)*

V_{IN} = 3.3V, V_{OUT}= 9V, L=1.5µH, R_{ILIM}=27kΩ, I_{OUT}= 3.5A, PSM, T_A = 25°C, unless otherwise noted.


V_{IN} Shutdown
I_{OUT}=0A

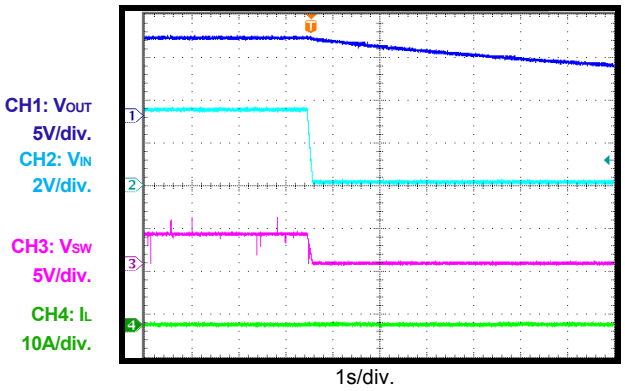


V_{IN} Shutdown
I_{OUT}=3.5A

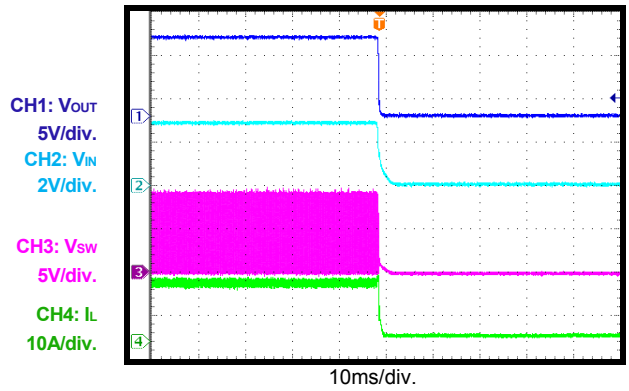


EN Start-Up
I_{OUT}=0A

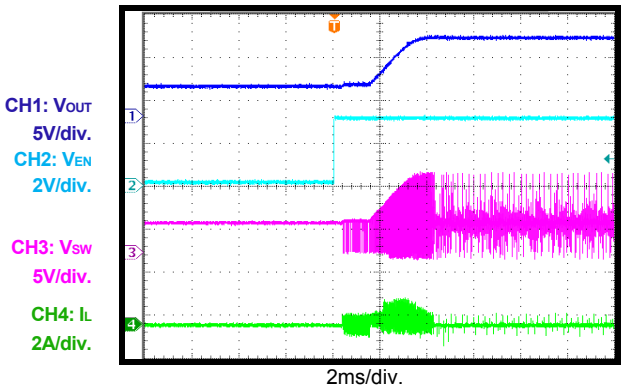


EN Start-Up
I_{OUT}=3.5A

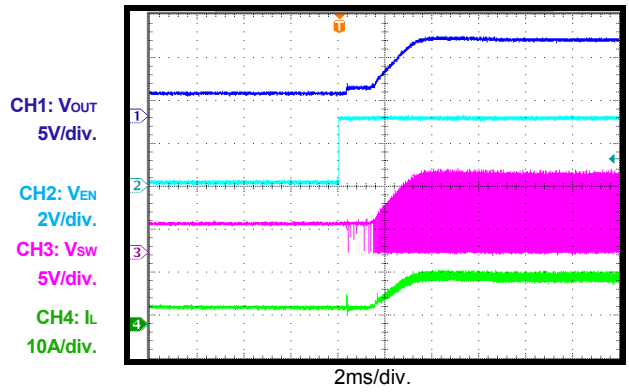

EN Shutdown
I_{OUT}=0A

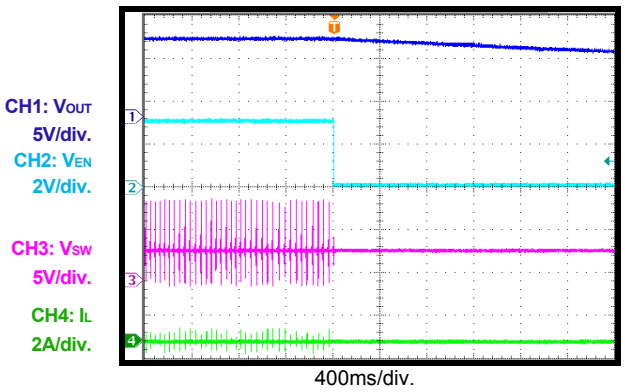

EN Shutdown
I_{OUT}=3.5A

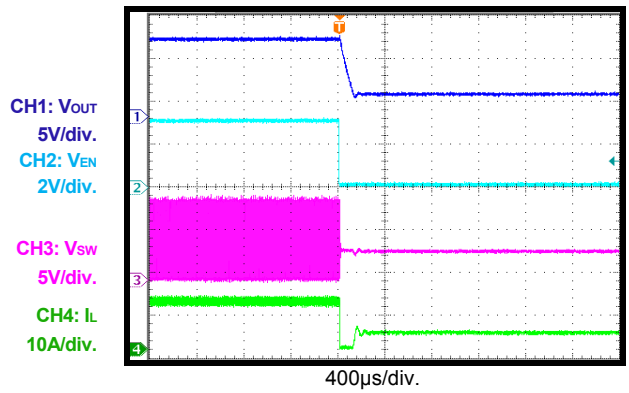


MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.

EVB TEST RESULTS *(continued)*

V_{IN} = 3.3V, V_{OUT}= 9V, L=1.5µH, R_{ILIM}=27kΩ, I_{OUT}= 3.5A, PSM, T_A = 25°C, unless otherwise noted.

Load Transient


I_{OUT}=0-1.75A, I_{RAMP}=25mA/µs, USM

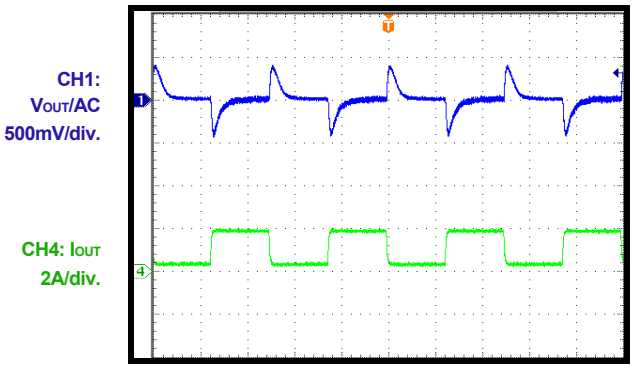

400µs/div.

Load Transient


I_{OUT}=3.5-1.75A, I_{RAMP}=25mA/µs

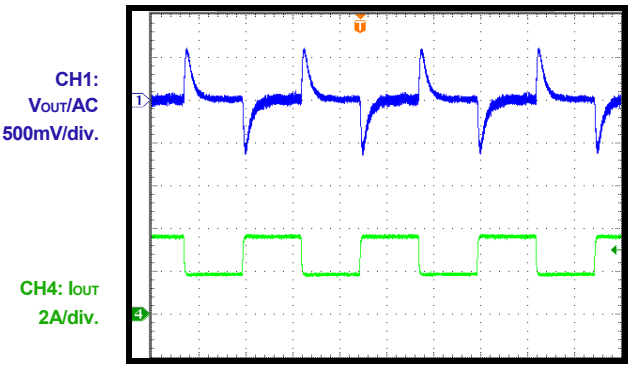

400µs/div.

Load Transient


I_{OUT}=0-1.75A, I_{RAMP}=25mA/µs, PSM

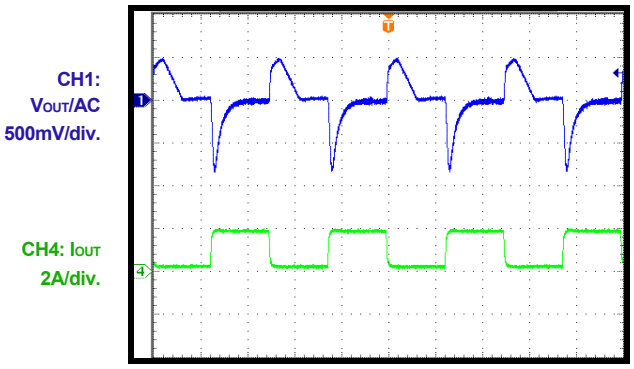

400µs/div.

Load Transient


I_{OUT}=0-1.75A, I_{RAMP}=25mA/µs, FCCM

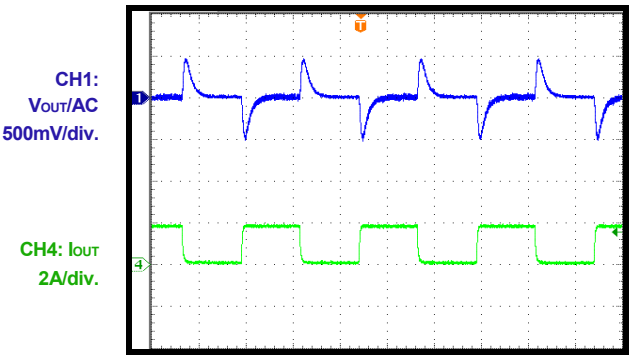

400µs/div.

Over-Current Entry


Increase Output Current Slow, 0A->6A

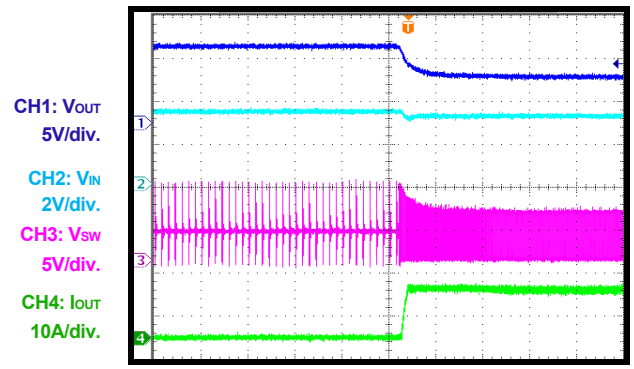

200µs/div.

Over-Current Recovery

Decrease Output Current Slow, 6A->0A

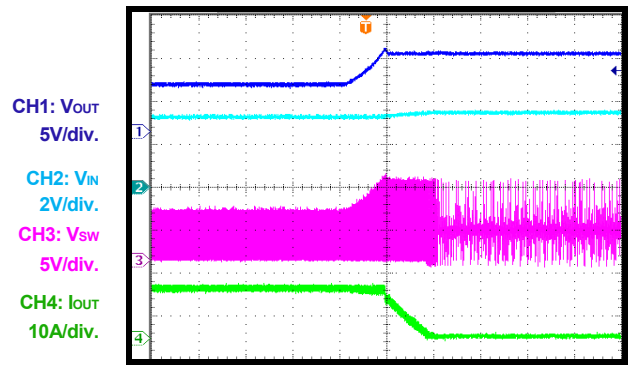

2ms/div.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.

PRINTED CIRCUIT BOARD LAYOUT

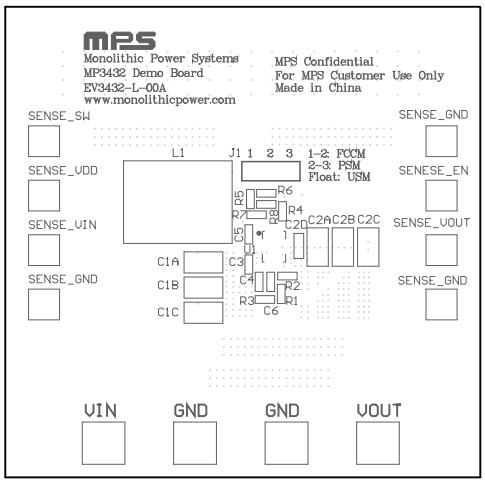


Figure 1—Top Silk Layer

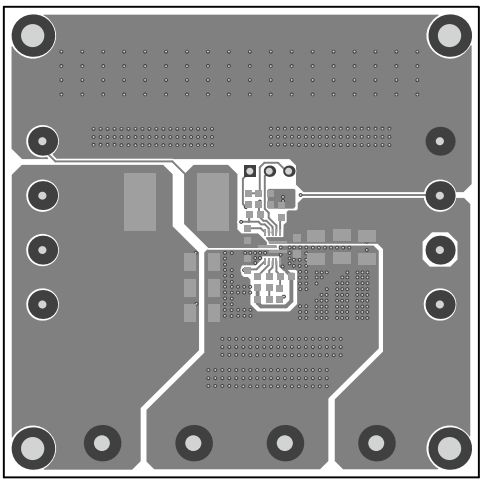


Figure 2—Top Layer

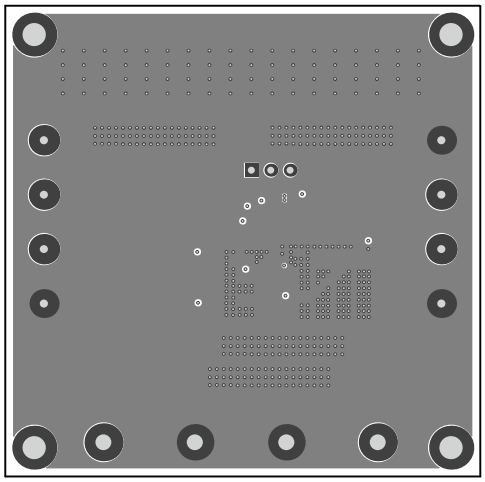


Figure 3—Inner Layer 1

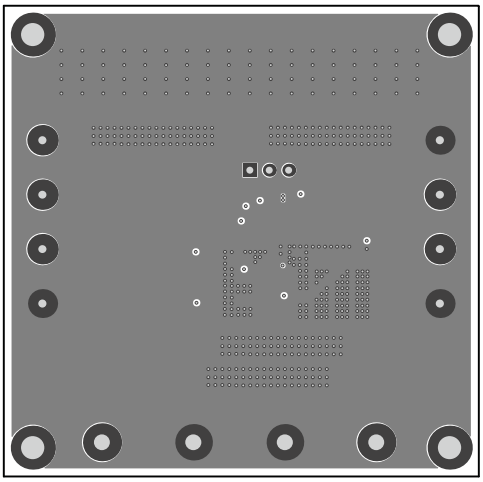


Figure 4—Inner Layer 2

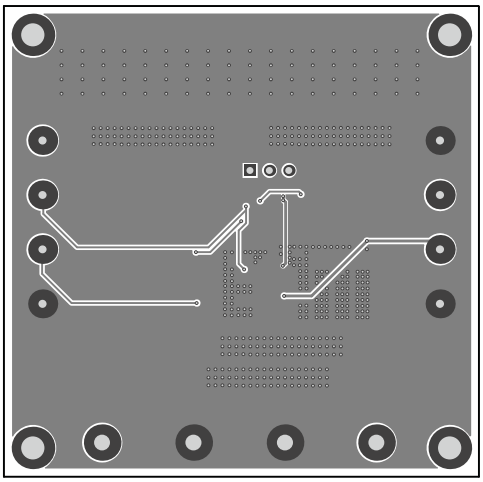


Figure 5—Bottom Layer

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.

QUICK START GUIDE

The output voltage of this board is set to 9V. The board layout accommodates most commonly used components. Following blew steps to quick start EV3432-L-00A.

1. Preset Power Supply to 3V ⩽ VIN ⩽ 8.4V.
2. Turn Power Supply off.
3. Connect Power Supply terminals to:
   a. Positive (+): VIN
   b. Negative (–): GND
4. Connect Load to:
   a. Positive (+): VOUT
   b. Negative (–): GND
5. Turn Power Supply on after making connections.
6. The MP3432 is enabled on the evaluation board once VIN is applied.
7. The output voltage VOUT can be changed by varying R2. Calculate the new value using the formula:

$$V_{OUT} = V_{FB} \times (1 + \frac{R1}{R2})$$

   Where V_{FB} = 1V and R1=750kΩ.
8. If USM and FCCM is needed, following below steps:
   a. Turn Power Supply off.
   b. Change J1 connection. Connect 1 to 2 for FCCM, connect 2 to 3 for PSM, and float 2 for USM.
   c. Turn the power on. IC will work with the mode which is set by step b.
9. If the auto pass-through function is needed, following below steps:
   a. Set J1 to make MP3432 working in PSM.
   b. Increasing input voltage much higher than $V_{OUT-SET}$, MP3432 will enter auto pass-through automatically.

NOTICE: The information in this document is subject to change without notice. Please contact MPS for current specifications. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.

MPS Proprietary Information. Patent Protected. Unauthorized Photocopy and Duplication Prohibited.
© 2019 MPS. All Rights Reserved.