

## **Notification about the transfer of the semiconductor business**

The semiconductor business of Panasonic Corporation was transferred on September 1, 2020 to Nuvoton Technology Corporation (hereinafter referred to as "Nuvoton"). Accordingly, Panasonic Semiconductor Solutions Co., Ltd. became under the umbrella of the Nuvoton Group, with the new name of Nuvoton Technology Corporation Japan (hereinafter referred to as "NTCJ").

In accordance with this transfer, semiconductor products will be handled as NTCJ-made products after September 1, 2020. However, such products will be continuously sold through Panasonic Corporation.

Publisher of this Document is NTCJ.

If you would find description "Panasonic" or "Panasonic semiconductor solutions", please replace it with NTCJ.

※ Except below description page

"Request for your special attention and precautions in using the technical information and semiconductors described in this book"

**Nuvoton Technology Corporation Japan**

# MN101EF63G

## 8-bit Single-chip Microcontroller

### ■ Overview

The MN101E series of 8-bit single-chip microcomputers (the memory expansion version of MN101C series) incorporate multiple types of peripheral functions. This chip series is well suited for in-vehicle body control, in-vehicle AV, camera, VCR, MD, TV, CD, LD, printer, telephone, home automation, pager, air conditioner, PPC, fax machine, music instrument and other applications.

This LSI brings to embedded microcomputer applications flexible, optimized hardware configurations and a simple efficient instruction set. MN101EF63 series has an internal 128 KB of ROM and 10 KB of RAM. Peripheral functions include 5 external interrupts, 34 internal interrupts including NMI, 12 timer counters, 4 types of serial interfaces, CAN controller based on CAN 2.0B, A/D converter, LCD driver, 2 types of watchdog timer, and data automatic function. The system configuration is suitable for in-vehicle body control microcontroller such as in-vehicle body control, heater control, relay BOX, or various motor controls.

With 5 oscillation systems (high-speed (internal frequency: 20 MHz), high-speed (crystal/ceramic frequency: max. 10 MHz) / low-speed (internal frequency: 30 kHz), low-speed (crystal/ceramic frequency: 32.768 kHz) and PLL: frequency multiplier of high frequency) contained on the chip, the system clock can be switched to high-speed frequency input (NORMAL mode), PLL input (PLL mode), or to low-speed frequency input (SLOW mode). The system clock is generated by dividing the oscillation clock or PLL clock. The best operation clock for the system can be selected by switching its frequency ratio by programming. High speed mode has the normal mode which is based on the clock dividing  $f_{pll}$ , ( $f_{pll}$  is generated by original oscillation and PLL), by 2 ( $f_{pll}/2$ ), and the double speed mode which is based on the clock not dividing  $f_{pll}$ .

A machine cycle (minimum instruction execution time) in the normal mode is 200 ns when the original oscillation  $f_{osc}$  is 10 MHz (PLL is not used). A machine cycle in the double speed mode, in which the CPU operates on the same clock as the external clock, is 100 ns when  $f_{osc}$  is 10 MHz. A machine cycle in the PLL mode and in the double speed mode when the internal oscillation  $f_{irc}$  is 20 MHz (PLL is not used) is 50 ns (maximum). The package is 64-pin, TQFP.

### ■ Product Summary

This datasheet describes the following model.

Model	ROM Size	RAM Size	Classification	Package
MN101EF63G	128 KB	10 KB	Flash EEPROM version	TQFP064-P-1010C TQFP064-P-1010D

**■ Features**

- ROM capacity: 128 KB
  
- RAM capacity: 10 KB
  
- Package:  
TQFP064-P-1010C/TQFP064-P-1010D (10 mm × 10 mm / 0.5 mm pitch)
  
- Machine Cycle:  
High-speed mode  
0.05 μs / 20 MHz (2.7 V to 5.5 V)  
0.125 μs / 8 MHz (1.8 V to 5.5 V)  
Low-speed mode  
62.5 μs / 32 kHz (1.8 V to 5.5 V)
  
- Clock Gear Circuit:  
Internal system clock speed is changeable by selecting division ratio of oscillation clock. (Divided by 1, 2, 4, 16, 32, 64, 128)
  
- Oscillation Circuit: 4 types  
High-speed (Internal oscillation: frc), High-speed (crystal/ceramic: fosc),  
Low-speed (Internal oscillation: frcs), Low-speed (crystal/ceramic: fx)  
High-speed internal oscillation 20 MHz / 16 MHz (selectable)  
Low-speed internal oscillation 30 kHz
  
- Clock Multiplication Circuit:  
PLL circuit output clock (fpll) fosc multiplied by 2, 3, 4, 5, 6, 8, 10, 1/2 × frc multiplied by 4, 5 enabled  
\* When clock multiplication circuit is not used, fpll = fosc or fpll = frc  
\* Selectable from high-speed clock for peripheral functions (fppll-div) fppll, fppll divided by 2, 4, 8, 16
  
- Operation Mode  
NORMAL mode (high-speed mode)  
PLL mode  
SLOW mode (low-speed mode)  
HALT mode  
STOP mode  
and operation clock switching
  
- Operating Voltage:  
1.8 V to 5.5 V
  
- Operation ambient temperature:  
−40°C to +85°C (Product guaranteed 105°C is available)

**■ Features (continued)**

- Interrupt: 35 sets

## &lt;Overrun interrupt&gt;

Non-maskable interrupt (NMI)

## &lt;Timer interrupt&gt;

Timer 0 interrupt

Timer 1 interrupt

Timer 2 interrupt

Timer 3 interrupt

Timer 4 interrupt

Timer 6 interrupt

Time-base interrupt

Timer 7 interrupt

Timer 7 compare register 2 match interrupt

Timer 8 interrupt

Timer 8 compare register 2 match interrupt

PWM overflow interrupt

PWM under flow interrupt

Timer 9 compare register 2 match interrupt

24H timer interrupt

Alarm match interrupt

## &lt;Serial interrupt&gt;

CAN interrupt

Serial 0 interrupt

Serial 0 UART reception interrupt

Serial 1 interrupt

Serial 1 UART reception interrupt

Serial 2 interrupt

Serial 2 UART reception interrupt

Serial 4 interrupt

Serial 4 stop condition interrupt

## &lt;A/D interrupt&gt;

A/D conversion interrupt

## &lt;Data automatic transfer interrupt&gt;

ATC1 interrupt

## &lt;Low voltage detection interrupt&gt;

Low voltage detection interrupt

## &lt;External interrupt&gt;

IRQ0 : Edge selection, noise filter connectable

IRQ1 : Edge selection, noise filter connectable

IRQ2 : Edge selection, noise filter connectable, both edge interrupt

IRQ3 : Edge selection, noise filter connectable, both edge interrupt

IRQ4 : Edge selection, noise filter connectable, both edge interrupt, key scan interrupt

## ■ Features (continued)

### • Timer Counter × 12 sets

General-purpose 8-bit timer × 5 sets

General-purpose 16-bit timer × 2 sets

Motor control 16-bit timer × 1 set

8-bit free-run timer × 1 set

Time-base timer × 1 set

Baud rate timer × 1 set

24H timer × 1 set

#### Timer 0 (General-purpose 8-bit timer)

Square wave output (Timer pulse output), added pulse (2bit) type PWM output can be output to large current pin TM0IOB, event count, simple pulse width measurement

Clock source: fpll-div, fpll-div/4, fpll-div/16, fpll-div/32, fpll-div/64, fpll-div/128, fs/2, fs/4, fs/8, fslow, external clock, timer A output

Real-time control: Timer (PWM) output is controlled among the three values: "Fixed to High", "Fixed to Low", or "Hi-Z" at falling edge of external interrupt 0 (IRQ0)

#### Timer 1 (General-purpose 8-bit timer)

Square wave output (Timer pulse output), event count

16-bit cascade connection (connected with timer 0), timer synchronous output

Clock source: fpll-div, fpll-div/4, fpll-div/16, fpll-div/32, fpll-div/64, fpll-div/128, fs/2, fs/4, fs/8, fslow, external clock, timer A output

#### Timer 2 (General-purpose 8-bit timer)

Square wave output (Timer pulse output), added pulse (2bit) type PWM output can be output to large current pin TM2IOB, event count, simple pulse width measurement,

24-bit cascade connection (connected with timer 0, 1), timer synchronous output

Double-buffered compare register (×1)

Clock source: fpll-div, fpll-div/4, fpll-div/16, fpll-div/32, fpll-div/64, fpll-div/128, fs/2, fs/4, fs/8, fslow, external clock, timer A output

Real-time control: Timer (PWM) output is controlled among the three values: "Fixed to High", "Fixed to Low", or "Hi-Z" at falling edge of external interrupt 0 (IRQ0)

#### Timer 3 (General-purpose 8-bit timer)

Square wave output (Timer pulse output), event count

16-bit cascade connection (connected with timer 2), 32-bit cascade connection (connected with timer 0, 1, 2)

Double-buffered compare register (×1)

Clock source: fpll-div, fpll-div/4, fpll-div/16, fpll-div/32, fpll-div/64, fpll-div/128, fs/2, fs/4, fs/8, fslow, external clock, timer A output

#### Timer 4 (General-purpose 8-bit timer)

Square wave output (Timer pulse output), added pulse (2bit) type PWM output, event count, simple pulse width measurement

Clock source: fpll-div, fpll-div/4, fpll-div/16, fpll-div/32, fpll-div/64, fpll-div/128, fs/2, fs/4, fs/8, fslow, external clock, timer A output

#### Timer 6 (8-bit free-run timer, time-base timer)

8-bit free-run timer

Clock source: fpll-div, fpll-div/2<sup>2</sup>, fpll-div/2<sup>3</sup>, fpll-div/2<sup>12</sup>, fpll-div/2<sup>13</sup>, fs, fslow, fslow/2<sup>2</sup>, fslow/2<sup>3</sup>, fslow/2<sup>12</sup>, fslow/2<sup>13</sup>

Time-base timer

Interrupt generation cycle: fpll-div/2<sup>7</sup>, fpll-div/2<sup>8</sup>, fpll-div/2<sup>9</sup>, fpll-div/2<sup>10</sup>, fpll-div/2<sup>13</sup>, fpll-div/2<sup>15</sup>, fslow/2<sup>7</sup>, fslow/2<sup>8</sup>, fslow/2<sup>9</sup>, fslow/2<sup>10</sup>, fslow/2<sup>13</sup>, fslow/2<sup>15</sup>

## ■ Features (continued)

### • Timer Counter (continued)

#### Timer 7 (General-purpose 16-bit timer)

Clock source:	fpll-div, fs, external clock, timer A output, serial 0 transfer clock output, timer 6 compare match cycle divided by 1, 2, 4, 16
Hardware configuration:	Double-buffered compare register (×2) Double-buffered input capture register (×2) Timer interrupt (×2 vector)
Timer function:	Square wave output (Timer pulse output), high-precision PWM output (cycle/duty continuous changeable) can be output to large current pin TM7IOB, timer synchronous output, event count, input capture function (both edges operable)
Real-time control:	Timer (PWM) output is controlled among the three values: "Fixed to High", "Fixed to Low", or "Hi-Z" at falling edge of external interrupt 0 (IRQ0)

#### Timer 8 (General-purpose 16-bit timer)

Clock source:	fpll-div, fs, external clock, timer A output, timer 6 compare match cycle divided by 1, 2, 4, 16
Hardware configuration:	Double-buffered compare register (×2) Double-buffered input capture register (×1) Timer interrupt (×2 vector)
Timer function:	Square wave output (Timer pulse output), high-precision PWM output (cycle/duty continuous changeable) can be output to large current pin TM8IOB, event count, pulse width measurement, input capture function (both edges operable) 32-bit cascade connection (connected with timer 7), 32-bit PWM output, Input capture is available in 32-bit cascade

#### Timer 9 (Motor control 16-bit timer)

Clock source:	fpll-div, fs, external clock, Timer A output divided by 1, 2, 4, 16
Hardware configuration:	Double-buffered compare register (×2) Timer interrupt (×3 vector)
Timer function:	Square wave output (Timer pulse output), switchable to large current output, complementary 3-phase PWM output, Triangle wave and saw tooth wave are supported, dead time insertion available, event count
Pin output control:	PWM output control is possible by external interrupt 0 to 4 (IRQ 0 to 4) ("Hi-z", output data fixed)

#### Timer A (baud rate timer)

Clock output for peripheral functions	
Clock source:	fpll-div divided by 1/1, 2, 4, 8, 16, 32, and fs divided by 2, 4

#### 24H timer

Clock source (Usable frequency):	fpll (4 MHz, 4.19 MHz, 5 MHz, 8 MHz, 8.38 MHz, 10 MHz, 16 MHz, 16.77 MHz, 20 MHz) fx (32.768 kHz), frc (20 MHz, 16 MHz), frcs (30 kHz)
Hardware configuration:	0.5 seconds counter, minute counter, hour counter Alarm compare register (in 0.5 seconds, in minutes, in hours) (×1) Timer interrupt (×2 vector)
Timer function:	Interval function (interrupts every 0.5 seconds, 1 second, 1 minute, 1 hour, 24 hours) Alarm function

### • Watchdog timer

- Overrun detection cycle is selectable from  $fs/2^{16}$ ,  $fs/2^{18}$ ,  $fs/2^{20}$
- Forced to reset inside LSI by hardware when a software processing error is detected twice

## ■ Features (continued)

### • Watchdog timer2

Overrun detection cycle is selectable from  $frcs/2^4$ ,  $frcs/2^5$ ,  $frcs/2^6$ ,  $frcs/2^7$ ,  $frcs/2^8$ ,  $frcs/2^9$ ,  $frcs/2^{10}$ ,  $frcs/2^{11}$ ,  $frcs/2^{12}$ ,  $frcs/2^{13}$ ,  $frcs/2^{14}$ ,  $frcs/2^{15}$

Forced to reset inside LSI by hardware when a software processing error is detected twice

### • Synchronous output function (Timer synchronous output, interrupt synchronous output)

Latch data is output from port 8 at the event timing of synchronous output signal of timer 1, timer 2, timer 7, or external interrupt2 (IRQ2)

### • A/D converter

10 bit × 12 channels

### • Data automatic transfer 1 system

ATC1

Data is automatically transferred in all memory space

External interrupt activation/internal event activation/software activation

Max. 255 byte continuous transfer

Serial continuous transmission and reception is supported

Burst transfer function (Including interrupt emergency stop)

### • CAN Controller

Channels: 1 channel

CAN 2.0B specification basis

Communication method: NRZ (Non-Return to Zero)

Transmission line: Bidirectional 2-wire serial communication

Communication speed: Max. 1 Mbps

Data length: 0 to 8 byte

Message frame: Standard frame and extended frame are supported

Standard frame format ID: 11 bits

Extended frame format ID: 29 bits

Buffer size: 32 messages (32 x 132 bit)

Interrupt 1 set

Interrupt source

Transition from bus off state to error active state, or back transition

Transition from warning error condition (error counter indicates 96 or more) to warning error condition released (error counter indicates less than 96) or back transition

Transmission completion

Transmission/reception error (Ack/Form/Stuff/Bit1/Bit0/CRC errors)

### • Serial Interface: 4 systems

Serial 0 (Full duplex UART / Synchronous serial interface)

Synchronous serial interface

Transfer clock source:  $f_{pll-div/2}$ ,  $f_{pll-div/4}$ ,  $f_{pll-div/16}$ ,  $f_{pll-div/64}$ ,  $f_s/2$ ,  $f_s/4$ ,

Timer 0 to 4, Timer A output divided by 1, 2, 4, 8, 16, External clock

MSB/LSB first selectable, 1 to 8 bits of arbitrary transfer

Continuous transmission, continuous reception, continuous transmission and reception are available.

Full duplex UART (Baud rate timer: selected from timer 0 to 4, or timer A)

Parity check, overrun error/framing error are detected

Transfer bits 7 to 8 are selectable

**■ Features (continued)**

## • Serial Interface:(continued)

Serial 1 (Full duplex UART / Synchronous serial interface)

Synchronous serial interface

Transfer clock source: fpll-div/2, fpll-div/4, fpll-div/16, fpll-div/64, fs/2, fs/4,  
Timer 0 to 4, Timer A output divided by 1, 2, 4, 8, 16, External clock

MSB/LSB first selectable, 1 to 8 bits of arbitrary transfer

Continuous transmission, continuous reception, continuous transmission and reception are available.

Full duplex UART (Baud rate timer: selected from timer 0 to 4, or timer A)

Parity check, overrun error/framing error are detected

Transfer bits 7 to 8 are selectable

Serial 2 (Full duplex UART / Synchronous serial interface)

Synchronous serial interface

Transfer clock source: fpll-div/2, fpll-div/4, fpll-div/16, fpll-div/64, fs/2, fs/4,  
Timer 0 to 4, Timer A output divided by 1, 2, 4, 8, 16, External clock

MSB/LSB first selectable, 1 to 8 bits of arbitrary transfer

Continuous transmission, continuous reception, continuous transmission and reception are available.

Full duplex UART (Baud rate timer: selected from timer 0 to 4, or timer A)

Parity check, overrun error/framing error are detected

Transfer bits 7 to 8 are selectable

Serial 4 (Multi master IIC / Synchronous serial interface)

Synchronous serial interface

Transfer clock source: fpll-div/2, fpll-div/4, fpll-div/8, fpll-div/32, fs/2, fs/4,  
Timer 0 to 4, Timer A output divided by 1, 2, 4, 8, 16, External clock

MSB/LSB first selectable, 1 to 8 bits of arbitrary transfer

Continuous transmission, continuous reception, continuous transmission and reception are available.

Multi master IIC

7, 10-bit slave address is settable

General call communication mode is supported

- Auto reset circuit
- Low voltage detection circuit
- Clock monitoring function
- LED driver: 6 sets



## ■ Features (continued)

### • LCD driver

#### LCD driver pins

Segment output: Max. 32 pins (SEG0-31)

SEG0-31 can be switched to I/O port in pins.

(Note) At reset, SEG0-31 are input ports.

Common output pins: 4 pins

COM0-3 can be switched to I/O port in pins.

#### Display mode selection

Static

1/2 duty, 1/2 bias

1/3 duty, 1/3 bias

1/4 duty, 1/3 bias

#### LCD driver clock

When source clock is main clock (fpll)

1/2<sup>18</sup>, 1/2<sup>17</sup>, 1/2<sup>16</sup>, 1/2<sup>15</sup>, 1/2<sup>14</sup>, 1/2<sup>13</sup>, 1/2<sup>12</sup>, 1/2<sup>11</sup>

When source clock is sub clock (fslow)

1/2<sup>9</sup>, 1/2<sup>8</sup>, 1/2<sup>7</sup>, 1/2<sup>6</sup>

Timer 0 to 4, Timer A output

#### LCD power

LCD power is separated from V<sub>DD5</sub> (can be used when V<sub>LC1</sub> ≤ V<sub>DD5</sub>)

Supply voltage can be selected externally.


(External supply voltage is supplied from VLC1, VLC2, and VLC3 pins, or can be used by dividing the voltage added to VLC1 pin by internal resistor.)

### • Ports

I/O ports	54 pins
LCD segment	32 pins
LCD common	4 pins
CAN	4 pins
Serial	15 pins
Timer I/O	21 pins
A/D input	12 pins
External interrupt	5 pins
LCD power	3 pins
LED (large current) driver	6 pins
High-speed oscillation	2 pins
Low-speed oscillation	2 pins
Special pins	10 pins
Operating mode input pins	3 pins
Reset input pins	1 pin
Analog reference voltage input pin	1 pin
Power pins	4 pins

■ Pin Description

- TQFP064-P-1010C / TQFP064-P-1010D

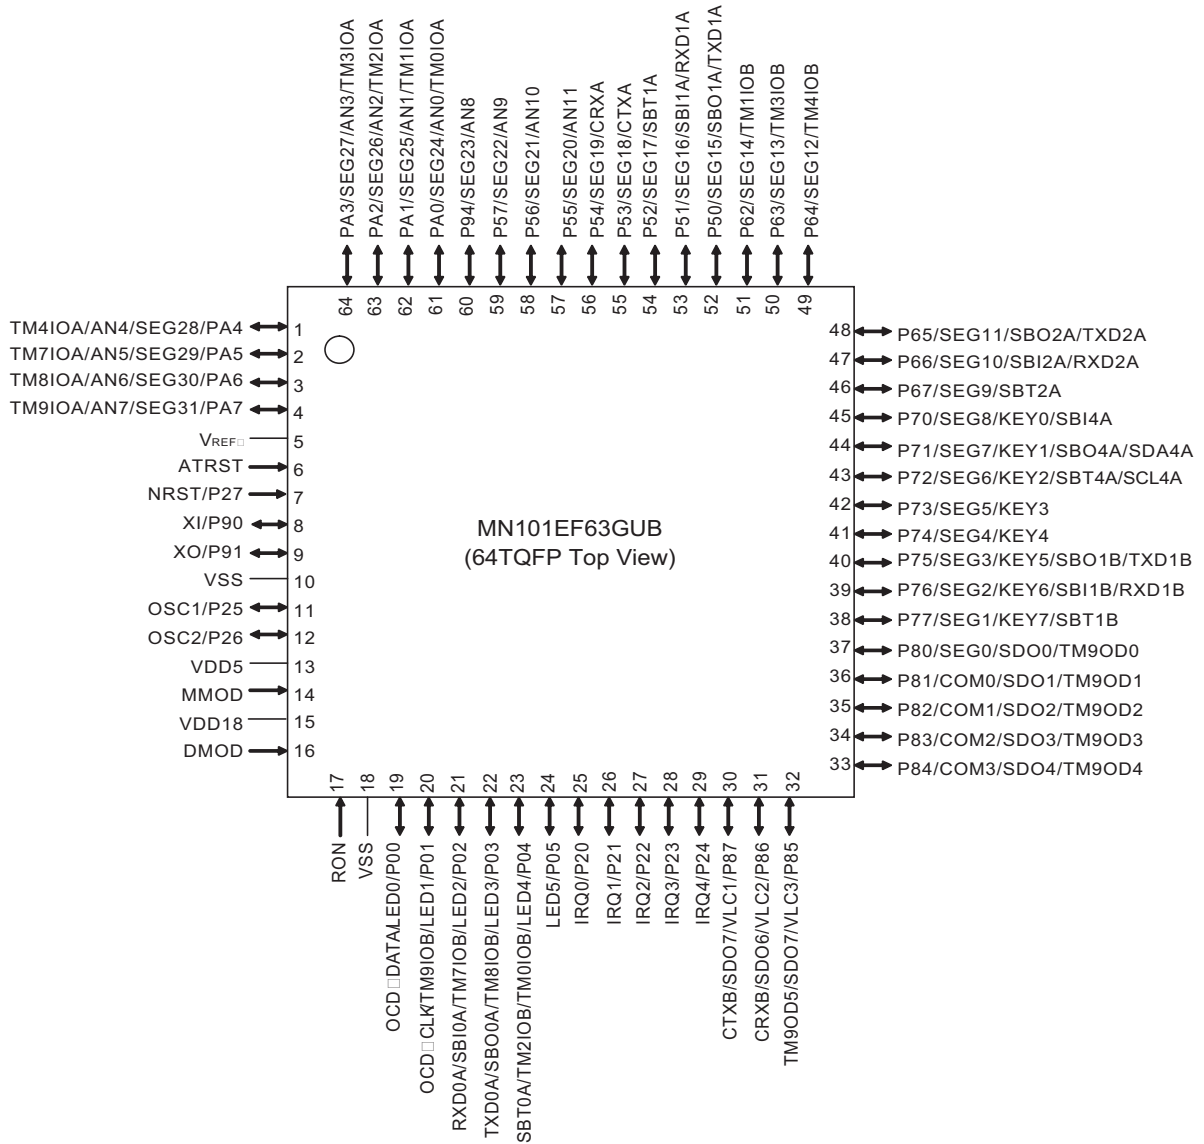

## Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products. No license is granted in and to any intellectual property right or other right owned by Panasonic Corporation, Nuvoton Technology Corporation Japan or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information de-scribed in this book.
- (3) The products described in this book are intended to be used for general applications (such as office equipment, communications equipment, measuring instruments and household appliances), or for specific applications as expressly stated in this book.  
Please consult with our sales staff in advance for information on the following applications, moreover please exchange documents separately on terms of use etc.: Special applications (such as for in-vehicle equipment, airplanes, aerospace, automotive equipment, traffic signaling equipment, combustion equipment, medical equipment and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.  
Unless exchanging documents on terms of use etc. in advance, it is to be understood that our company shall not be held responsible for any damage incurred as a result of or in connection with your using the products described in this book for any special application.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. We do not guarantee quality for disassembled products or the product re-mounted after removing from the mounting board.  
When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) When reselling products described in this book to other companies without our permission and receiving any claim of request from the resale destination, please understand that customers will bear the burden.
- (8) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of our company.