

**Ratings**

Voltage: 300 V  
 Temperature: -40 ~ 80 °C  
 Flammability: FT2

**Conductor**

Conductor count: 3  
 Gauge: 24 AWG 0.2 mm<sup>2</sup>  
 Material: bare copper strands  
 Strand size: Ø 0.1 mm x 26  
 Max resistance at 20 °C: 87.6 Ω /km

**Insulator**

Material: TPE 85A  
 Color: white, black, red  
 Diameter: Ø 1.1 ±0.10 mm  
 Nominal thickness: 0.24 mm  
 Minimum resistance @ 20 °C: 100 MΩ /km

**Shield**

Type: braided  
 Material: bare copper strands  
 Stranding: 16/5/Ø0.10 mm, 65% minimum coverage

**Drain**

Material: bare copper strands  
 Stranding: Ø 0.1 x 26

**Outer jacket**



Material: TPU (Polyether Polyurethane) 80A  
 Color: black  
 Diameter: Ø 4.5 ±0.20 mm  
 Nominal thickness: 0.80 mm

**Wire marking:** E339579 UL AWM STYLE 20280 24 AWG 80°C  
 300V --- cUL AWM I/II A 80 °C 300V FT2 TENSILITY

**Tests**

Spark test: 3.0 kV  
 Insulation tensile strength: 0.562 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113 ±2 °C for 7 days:  
 Minimum jacket tensile strength 70 % original  
 Minimum insulation tensile strength 75 % original  
 Minimum jacket elongation 65 % original  
 Minimum insulation elongation 75 % original  
 Heat shock: 121 ±1 °C /1 hour, no observed degradation  
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %  
 Cold bend: -10 ±2 °C /1 hour, no observed cracking  
 Dielectric test: 2000 Vac for 1 minute without breakdown

**Use:** Internal wiring or external interconnection of electronic equipment.

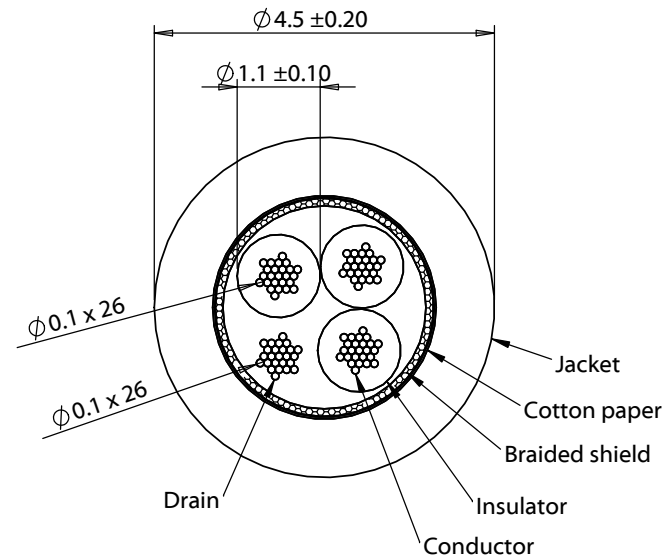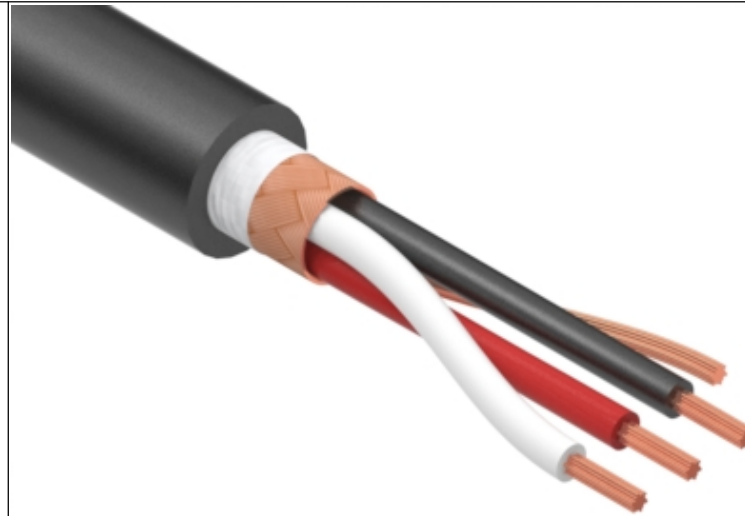

Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	3/27/2018	Initial release	Verified:	RoHS and REACH compliant Phthalate and halogen free	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function: no open, no short circuit, no intermittent	Size: Part number: A 30-00913
				Description: Wire, 3C BC, 24 AWG, UL20280, 300V, 80C, 4.5 mm braided shield, FT2, TPU	Scale: 10:1  Sheet 1 of 1

5

4

3

2

1