

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 2
 Gauge: 22 AWG 0.34 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 17$
 Resistance at 20 °C: 94.2 Ω /km max


Insulation

Material: PVC
 Color: red, black
 Diameter: 3.6 ± 0.20 mm
 Nominal thickness: 0.51 mm
 Resistance at 20 °C: 10 M Ω /km min

Wire marking: E339579 UL AWM STYLE 2468 22 AWG 80°C 300V VW-1 --- cUL AWM I A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking

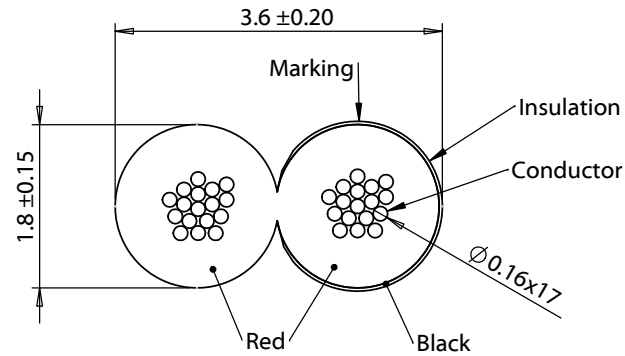

Revision:	Date:	Description:	Prepared:	Notes: RoHS and REACH compliant	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>		
A	7/21/2014	Initial release	Verified:			Function test: no open, no short circuit, no intermittent	
A1	10/14/2014	Updated jacket construction	Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 2C TS, 22 AWG, UL2468, 300V, 80°C, 3.6 mm, VW-1, PVC, red and black	Size: A	Part number: 30-00417	
A2	9/8/2015	Updated jacket tolerance			Scale: 12:1		Sheet 1 of 1
A3	9/7/2018	Increased operating temperature range					

5

4

3

2

1