

- DIP-16 Package
- Unregulated device
- I/O isolation 3000 VACrms rated for 300 Vrms working voltage
- Medical safety to UL 60601-1 and IEC/EN 60601-1 3rd edition, 2 x MOOP
- Industrial safety to IEC/EN/UL 60950-1
- Operating temp. range -25°C to $+80^{\circ}\text{C}$
- 3-years product warranty



ES 60601-1 IEC 60601-1
UL 62368-1 IEC 62368-1

The THI 2M series is a new range of ultra-compact 2W DC/DC-converters providing a high I/O-isolation voltage of 3000 VAC. With a reinforced I/O-isolation system this product is an economical solution for many applications in instrumentation, industrial controls, medical equipment and everywhere where supplementary- or reinforced insulation is required to meet requested safety standards. Full SMD-design with exclusive use of ceramic capacitors ensure a very high reliability and a long product lifetime.

| Models | | | | | | |
|-------------|----------------------------------|----------|------------------|----------|------------------|-----------------|
| Order Code | Input Voltage Range | Output 1 | | Output 2 | | Efficiency typ. |
| | | Vnom | I _{max} | Vnom | I _{max} | |
| THI 2-0511M | 4.5 - 5.5 VDC (5 VDC nom.) | 5 VDC | 400 mA | | | 66 % |
| THI 2-0512M | | 12 VDC | 165 mA | | | 66 % |
| THI 2-0513M | | 15 VDC | 133 mA | | | 66 % |
| THI 2-0522M | | +12 VDC | 83 mA | -12 VDC | 83 mA | 72 % |
| THI 2-0523M | | +15 VDC | 66 mA | -15 VDC | 66 mA | 73 % |
| THI 2-1211M | 10.8 - 13.2 VDC (12 VDC nom.) | 5 VDC | 400 mA | | | 66 % |
| THI 2-1212M | | 12 VDC | 165 mA | | | 66 % |
| THI 2-1213M | | 15 VDC | 133 mA | | | 66 % |
| THI 2-1222M | | +12 VDC | 83 mA | -12 VDC | 83 mA | 74 % |
| THI 2-1223M | | +15 VDC | 66 mA | -15 VDC | 66 mA | 75 % |
| THI 2-2411M | 21.6 - 26.4 VDC (24 VDC nom.) | 5 VDC | 400 mA | | | 66 % |
| THI 2-2412M | | 12 VDC | 165 mA | | | 66 % |
| THI 2-2413M | | 15 VDC | 133 mA | | | 66 % |
| THI 2-2422M | | +12 VDC | 83 mA | -12 VDC | 83 mA | 74 % |
| THI 2-2423M | | +15 VDC | 66 mA | -15 VDC | 66 mA | 75 % |

Input Specifications

| | | |
|------------------------|----------------|--|
| Input Current | - At no load | 5 Vin models: 60 mA typ. 12 Vin models: 30 mA typ. 24 Vin models: 15 mA typ. |
| | - At full load | 5 Vin models: 580 mA typ. 12 Vin models: 240 mA typ. 24 Vin models: 120 mA typ. |
| Surge Voltage | | 5 Vin models: 9 VDC max. (1 s max.) 12 Vin models: 18 VDC max. (1 s max.) 24 Vin models: 30 VDC max. (1 s max.) |
| Recommended Input Fuse | | 5 Vin models: 1'000 mA (slow blow) 12 Vin models: 500 mA (slow blow) 24 Vin models: 200 mA (slow blow) (The need of an external fuse has to be assessed in the final application.) |
| Input Filter | | Internal Capacitor |

Output Specifications

| | | |
|--------------------------|--------------------------------------|--|
| Voltage Set Accuracy | | ±4% max. |
| Regulation | - Input Variation (Vmin - Vmax) | single output models: 1.5% max. dual output models: 1.5% max. |
| | - Load Variation (20 - 100%) | single output models: 12% max. (5 Vout model) 10% max. (other models) dual output models: 10% max. (Output 1) 10% max. (Output 2) (12% max. for ±5 Vout model) |
| | - Voltage Balance (symmetrical load) | dual output models: 1% max. |
| | Ripple and Noise | - 20 MHz Bandwidth |
| Capacitive Load | - single output | 5 Vout models: 330 µF max. 12 Vout models: 330 µF max. 15 Vout models: 330 µF max. |
| | - dual output | 12 / -12 Vout models: 100 / 100 µF max. 15 / -15 Vout models: 100 / 100 µF max. |
| Minimum Load | | 2 % of Iout max. |
| Temperature Coefficient | | ±0.02 %/K max. |
| Short Circuit Protection | | Limited 0.5 s max., Automatic recovery |

Safety Specifications

| | | |
|-----------------------|-----------------------------|---|
| Safety Standards | - IT / Multimedia Equipment | CSA-C22.2, No 60950-1 EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 UL 62368-1 |
| | - Medical Equipment | EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 CSA-C22.2, No 60601-1 2 x MOOP (Means Of Operator Protection) MOPP (Means Of Patient Protection) www.tracopower.com/overview/thi2m |
| | - Certification Documents | |
| Pollution Degree | | PD 2 |
| Over Voltage Category | | OVC II |

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


| | | |
|---------------------------|--|---|
| Relative Humidity | | 95% max. (non condensing) |
| Temperature Ranges | - Operating Temperature - Case Temperature - Storage Temperature | -25°C to +80°C +90°C max. -50°C to +125°C |
| Power Derating | - High Temperature | 2.5 %/K above 60°C |
| Cooling System | | Natural convection (20 LFM) |
| Altitude During Operation | | 5'000 m max. |
| Switching Frequency | | 50 - 100 kHz 80 kHz typ. |
| Insulation System | | Reinforced Insulation |
| Working Voltage (rated) | | 300 VAC |
| Isolation Test Voltage | - Input to Output, 60 s - Input to Output, 1 s | 3'000 VAC (acc. to 60601-1) 4'800 VAC (acc. to 60950-1) 6'000 VAC |
| Isolation Resistance | - Input to Output, 500 VDC | 10'000 MΩ min. |
| Isolation Capacitance | - Input to Output, 100 kHz, 1 V | 15 pF typ. 20 pF max. |
| Leakage Current | - Touch Current | 2 μA max. |
| Reliability | - Calculated MTBF | 2'000'000 h (MIL-HDBK-217F, ground benign) |
| Housing Material | | Non-conductive Plastic (UL94 V-0 rated) |
| Potting Material | | Silicone (UL 94 V-0 rated) |
| Pin Material | | Phosphor Bronze (C5100) |
| Pin Foundation Plating | | Nickel (2.5 μm min.) |
| Pin Surface Plating | | Gold (75 - 125 nm), glossy |
| Soldering Profile | | Wave Soldering 265°C / 10 s max. |
| Connection Type | | THD (Through-Hole Device) |
| Weight | | 5.1 g |
| Thermal Impedance | | 22.5 K/W |
| Environmental Compliance | - REACH Declaration - RoHS Declaration | www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.) |

Supporting Documents

| | |
|--|--|
| Overview Link (for additional Documents) | www.tracopower.com/overview/thi2m |
|--|--|

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

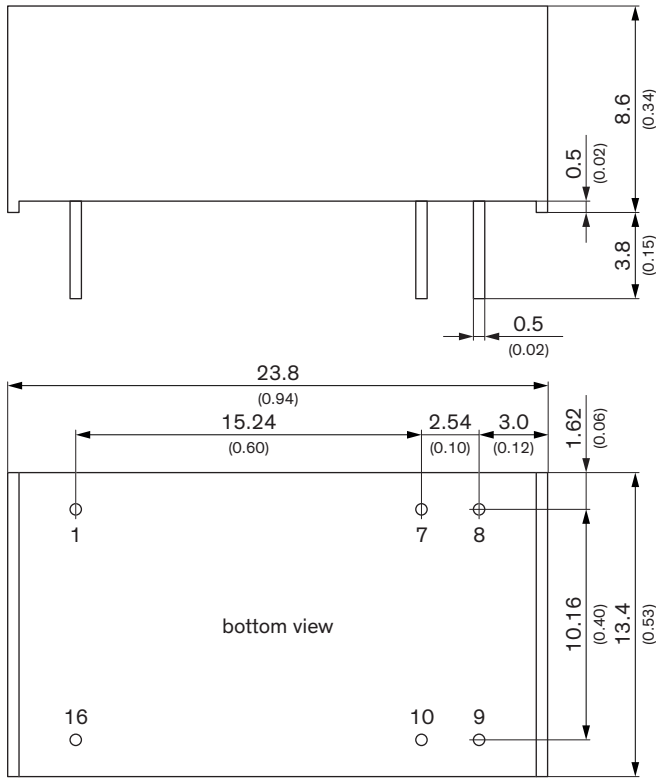

Dimensions in mm (inch)
 Tolerances: x.x ±0.25 (±0.01)
 Tolerances: x.xx ±0.125 (±0.005)
 Pin diameter ±0.05 (±0.002)

| Pinout | | |
|--------|------------|------------|
| Pin | Single | Dual |
| 1 | -Vin (GND) | -Vin (GND) |
| 7 | NC | NC |
| 8 | NC | Common |
| 9 | +Vout | +Vout |
| 10 | -Vout | -Vout |
| 16 | +Vin (Vcc) | +Vin (Vcc) |

NC: Not connected