**ROHS COMPLIANT** 

## PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	REL. NRN 40359	03/17/16	STW
Α	DCN 46776	10/10	STW

## **MATERIAL:**

BODY, CAP, SLEEVE &

**COUPLING NUT:** STAINLESS STEEL PER AMS-5640,

ALLOY UNS \$30300. TYPE 1

BERYLLIUM COPPER PER ASTM B196. LOCK RING:

ALLOY No. UNS C17300, TD04

SLEEVE (CHIP) & CONTACT: BRASS PER ASTM B16, ALLOY UNS No. C36000

**BELLOWS SPRING:** ELECTRO DEPOSITED NICKEL: GOLD PLATED

**INSULATOR:** ULTEM 1000 PER ASTM D5205

**GASKET:** SILICONE RUBBER PER A-A-59588,

CLASS 2B. GRADE 50/60

ALUMINUM NITRIDE SUBSTRATE WITH **RESISTOR ELEMENT:** 

TANTALUM NITRIDE RESISTOR: GOLD PLATED

**TERMINATIONS** 

**FINISH:** 

BODY, CAP.

**COUPLING NUT &** 

SLEEVE (BODY): PASSIVATED PER AMS-2700, TYPE II.

**CONTACT:** 

GOLD PER ASTM B488, TYPE I, CODE C, CLASS .5, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.52, SLEEVE (CHIP):

OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00010" MIN

**PERFORMANCE:** 

**IMPEDANCE:** 50 OHMS

FREQ. RANGE: DC TO 50.0 GHz

VSWR: 1.30:1 DC TO 50.0 GHz

**OPERATING TEMP.:** -65°C TO +125°C


1 WATT (POWER INPUT DERATED LINEARLY AVG. POWER:

FROM 25°C TO 10% OF AVERAGE AT 125°C)

100 WATTS (PEAK POWER FOR A DUTY CYCLE **PEAK POWER:** OF 5X10-4 MAXIMUM PULSE DURATION OF 5 MICROSECONDS

**ENGAGEMENT/** 

**DISENGAGEMENT:** 2 IN-LBS -.313 7.94 HEX ---

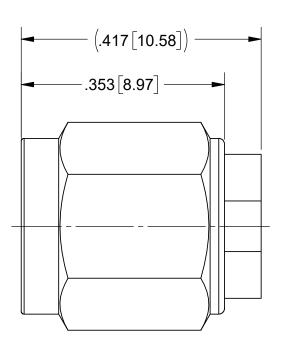

|--|

SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES:	UNI ESS OTHERWISE SPECIFIED	SV Microwave Inc

	MATERIAL:	SEE NOTES		
	FINISH:	SEE NOTES		
<b>S</b> )	SURFACE ARI	<sup>EA:</sup> N/A		
	PROPRIETARY			
	IS THE SOLE PE ANY REPRODU WITHOUT THE	ION CONTAINED IN THIS DRAW ROPERTY OF SV MICROWAVE, CTION IN PART OR AS A WHOL WRITTEN PERMISSION OF E, INC IS PROHIBITED.		

B					
FRACTIONAL: $\pm 1/64$ ANGULAR: $X^{\circ}$ $\pm 1^{\circ}0'$					
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005					
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994					
THIRD AND EDDO IECTION					

INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	6) DIA WIT 7) RE
THIRD ANGLE PROJECTION	DF
<u> </u>	CI

CIVILLOG OTTILITAVIOL OF LOFFIL	_
ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]     ALL DIMENSIONS ARE AFTER PLATING.     BREAK CORNERS & EDGES .005 R. MAX.	
4) CHAM. 1ST & LAST THREADS.	
5) SURFACE ROUGHNESS 63 <sub>6</sub> MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC	
WITHIN .005 T.I.R.	
7) REMOVE ALL BURRS	

DRAWN:	BNK 05/26/15
CHECKED:	STW 05/26/15
APPROVED:	STW 05/26/15

SV Microwave, Inc	C
-------------------	---

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

2.4mm, 50 OHM PLUG **TERMINATION DC TO 50 GHz** 

/15	SIZE <b>B</b>	95077	DWG. NO.	SF8016-	6404
/15	S	CALE: 6:1			SHEET 1 C

OF 1