

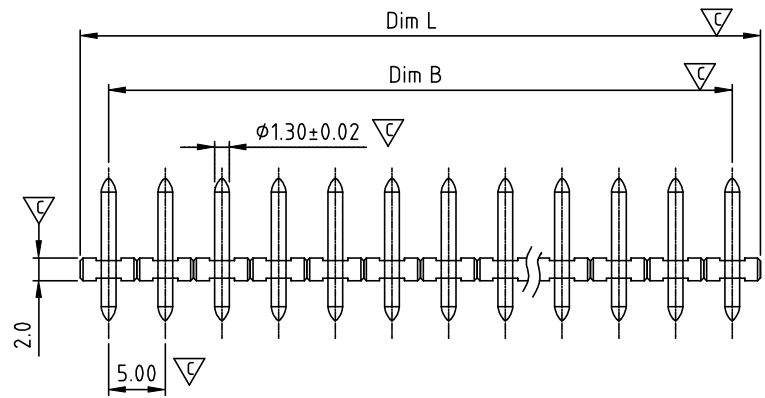


SIGN	DATE	DESCRIPTION	APPROVER
△	08/23-14	update the drawing	APPROVER
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

Material:

- Item ① Terminal(housing): Thermoplastic (UL94V-0)
  - Item ② Contact pin: Brass , Tin plated
- Electrical: UL / VDE / TUV
- Voltage rating: 300V / 300V / 300V
  - Current rating: 15A / 12A/ 15A
  - Withstanding Voltage: 1.6KV / 2.5KV / 2.5KV
  - Operating temperature: -40°C to +115°C(PA66) ( -40°C to +130°C(PA46))
  - Soldering temperature(PA66): 260°C±5°C/5 Sec
  - Reflow Soldering temperature(PA46): 260°C/10 Sec Max
  - Safety Approval:
  - Critical dimension:



**OP xx 0 0 x x xxxx G**


POLES ————

02 pole  
 ...  
 24 pole

0 Tin plated 200u"  
 1 Gold plating 10u"  
 2 Gold flash

G RoHS compliant (lead<4%)  
 In copper Alloy  
 0000: Standard  
 000W: F0154 Box △  
 Any special item by customer request.  
 please contact sales department.

0 PA 66  
 1 PA46

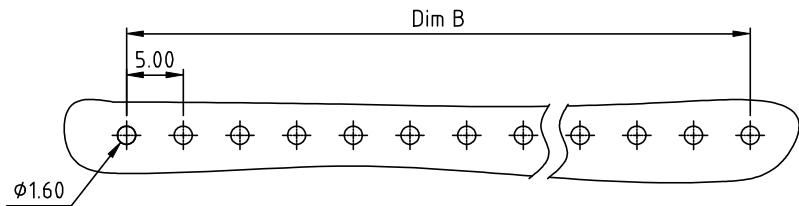

P.C.B. LAYOUT

N = Number of poles  
 Dim L=Nx5.0  
 Dim B=(N-1)x5.0 ↔

	Dim L	Dim B
2-5p	±0.10	±0.10
6-9p	±0.15	±0.15
10-13p	±0.20	±0.20
14-17p	±0.25	±0.25
18-21p	±0.30	±0.30
22-24p	±0.40	±0.40

<b>ANYTEK</b>				<b>CUSTOMER COPY</b>			
ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRDO PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD							
TITLE		OP 5.0 Series 12.5mm					
PART NO.		OPxx00xxxxxxG			DWG NO.		80P0085
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance	
		Evan	Evan			UNIT: mm	X. ±0.50
		08/23`14	08/23`14			SCALE: NONE	X.X ±0.30
						SHEET: 01/01	X.XX ±0.10
					REV: C	X° ±1°	