

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1700820216

Status:


Active

Overview:

EdgeLine High-Speed Connectors

Description:

EdgeLine CoPlanar+ Connector, 15 Gbps, 0.80mm Pitch, 2.36mm PCB Thickness, 216 Circuits

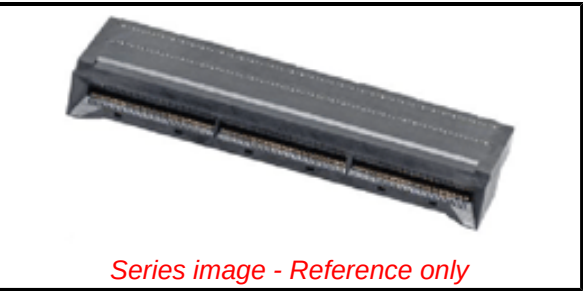

Series image - Reference only

Documents:	
3D Model	Application Specification AS-170305-0002-001 (PDF)
Drawing (PDF)	Packaging Specification PK-170082-0001-001 (PDF)
3D Model (PDF)	Symbol Footprint Data SYM-170082-0216-001 (PDF)
Product Specification PS-170305-0001-001 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-170305-0001-001 (PDF)	

Application tooling part link	
Application Tooling Part Link	62100-0600
Application Tooling Part Link	62202-2803
General	
Product Family	Edge Card Connectors
Series	170082
Component Type	Edgecard to PCB
Data Rate	12.5-20.0 Gbps
Edge Card Thickness	2.36mm
Electrical Model	Yes
High Power Bay (30.0A or more)	No
Orientation	Coplanar
Overview	EdgeLine High-Speed Connectors
Product Name	EdgeLine
Standard Based	General
UPC	884982519978
Physical	
(p)ower-(s)ignal Configuration	216s - 0p
Circuit Size Range	201-294 Circuits
Circuits (Loaded)	216
Circuits (maximum)	216
Color - Resin	Black
Durability (mating cycles max)	200
Entry Angle	N/A
Keying to Mating Part	N/A
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	36.603/g
PCB Locator	No
PCB Thickness - Recommended	2.79mm
Packaging Type	Tray
Pitch - Mating Interface	2.35mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin
Electrical	

EU ELV	
Not Relevant	
EU RoHS	
Not Reviewed	
REACH SVHC	
Not Contained Per	
-ED/88/2018 (15	
January 2019)	
Halogen-Free	
Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
170082 Series

Current - Maximum per Contact
Voltage - Maximum

0.5A
250V AC (RMS)/DC

Solder Process Data

Lead-freeProcess Capability

N/A

Material Info

Reference - Drawing Numbers

Application Specification
Electrical Model Document
Packaging Specification
Product Specification
S-Parameter Model
Sales Drawing
Symbol/Footprint Data

AS-170305-0001-001, AS-170305-0002-001
EE-170082-0001-001
PK-170082-0001-001
PS-170305-0001-001
SP-170082-0001-001
SD-170082-0216-001
SYM-170082-0216-001

This document was generated on 01/11/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION