

Reduction


6xxxx/OM

Reduction	Brass CuZn39Pb3, nickel-plated
O-ring	Nitrile rubber NBR
External thread	Pg as per DIN 40430
Internal thread	Pg as per DIN 40430



Properties

	reduction of threaded or clearance holes to smaller thread sizes
Temperature range	-40 °C +100 °C
Protection grade	max.IP68 dependent on the combination with other components

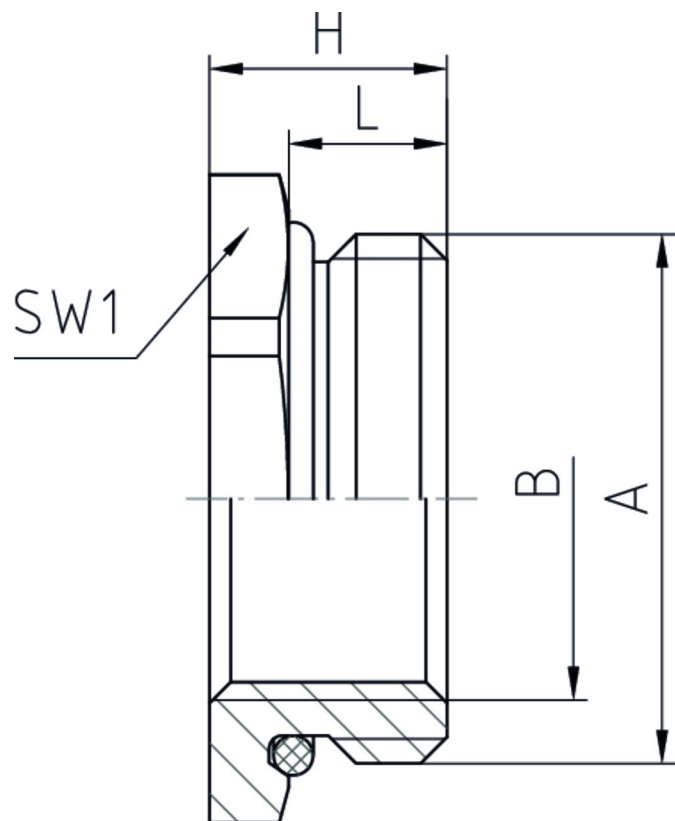

Features

A	B	L	SW1	H	VPE	Part No.
Pg 9	Pg 7	6	18	8,5	100	60907/OM
Pg 11	Pg 7	6	20	8,5	100	61107/OM
Pg 11	Pg 9	6	20	8,5	100	61109/OM
Pg 13,5	Pg 7	6,5	24	9,5	100	61307/OM
Pg 13,5	Pg 9	6,5	24	9,5	100	61309/OM
Pg 13,5	Pg 11	6,5	24	9,5	100	61311/OM
Pg 16	Pg 7	6,5	24	9,5	100	61607/OM
Pg 16	Pg 9	6,5	24	9,5	100	61609/OM

A	B	L	SW1	H	 VPE	Part No.
Pg 16	Pg 11	6,5	24	9,5	100	61611/OM
Pg 16	Pg 13,5	6,5	24	9,5	100	61613/OM
Pg 21	Pg 11	7	32	10	100	62111/OM
Pg 21	Pg 13,5	7	32	10	100	62113/OM
Pg 21	Pg 16	7	32	10	100	62116/OM
Pg 29	Pg 16	8	41	11,5	50	62916/OM
Pg 29	Pg 21	8	41	11,5	50	62921/OM
Pg 36	Pg 21	9	50	12,5	25	63621/OM
Pg 36	Pg 29	9	50	12,5	25	63629/OM
Pg 42	Pg 36	10	60	14	25	64236/OM