04/04/07

REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		A版發行	03/20/07
B		修改圖形與實物相符	04/04/07
C	ES.00704.095	取消 LOGO 標示	04/14/07



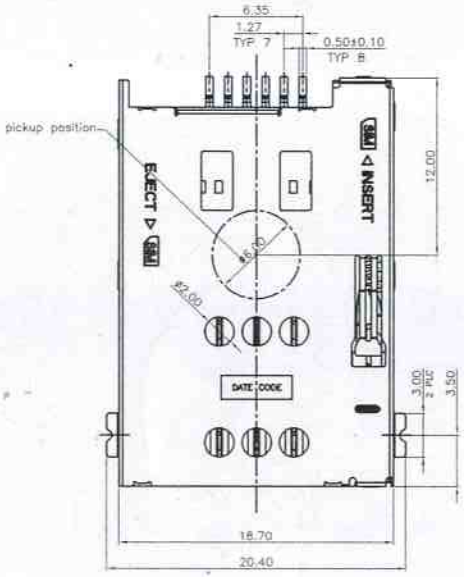

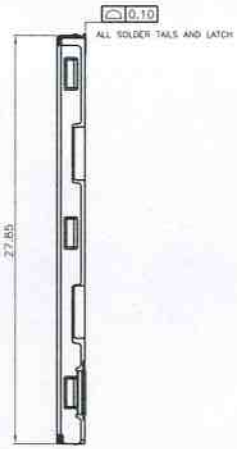

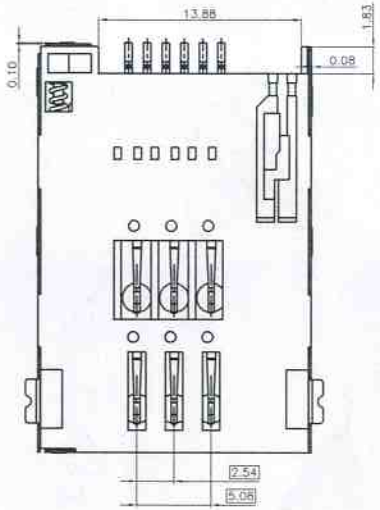

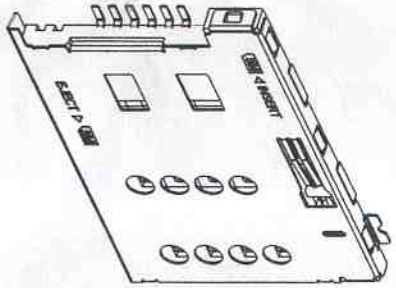

NOTES:

1.SPECIFICATIONS
INSULATION RESISTANCE: 500M min.AT DC 500V DC
WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
CONTACT RESISTANCE: 100MΩmax. AT 10MA/20mV max
CURRENT RATING: 0.5A
VOLTAGE RATING: 5.0 vrms
OPERATING TEMP.RANGE:−55 °C+85 °C
MATING CYCLES: 5000 INSERTIONS

2.MATERIAL:
INSULATOR: H−TEMPERATURE PLASTIC,UL 94V−0,
COLOR"BLACK
TERMINAL: COPPER ALLOY,T=0.15mm
SWITCH: COPPER ALLOY,T=0.10mm
SHELL: STAINLESS STELL,T=0.15mm

3.FINISH:
TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL.
SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER LATCH

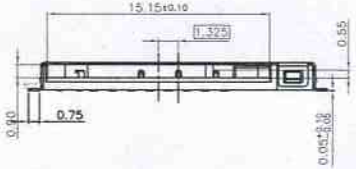

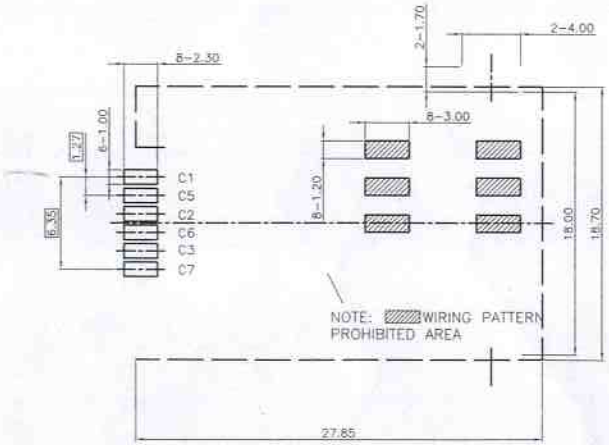

RECOMMENDED PCB LAYOUT

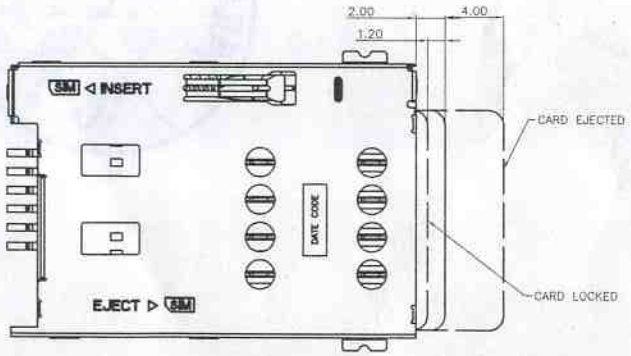

GENERAL	TOLERANCE	FILE.NO.	101−00269	PART.NO.	101−00269−xx	DRAWN	COCO	MATERIAL		SCALE	N/A
X.±0.50	x.°± 5°	REV.	°C	TITLE	SIM CARD READER 6PIN (PUSH/PUSH)W/O SWITCH	CHECKED	楊 秀娟	DATE	04/14/2007	UNIT	MM
.X±0.38	.x°± 2°	SIZE		SHEET	1/1	APPROVED	陳俊欲	SM	Shouh Min Industry (ShenZhen)CO.,LTD		
.XX±0.25	.xx± 1°	A4									