


CONNECTOR P/N	TYPE OF FIT	K (KEY), in/mm	ØD (µm)	Ød (µm)	CABLE DIAMETER (mm)
106055-2400	TIGHT	.0785/1.99	125.5	1.0	3
106056-2400	STANDARD	.083/2.11	125		
106055-4400	TIGHT	.0785/1.99	125	1.0	3
106056-4400	STANDARD	.083/2.11	125		
106055-5400	TIGHT	.0785/1.99	126	1.0	3
106056-5400	STANDARD	.083/2.11	126		
106055-5600	TIGHT	.0785/1.99	126	1.0	2.4

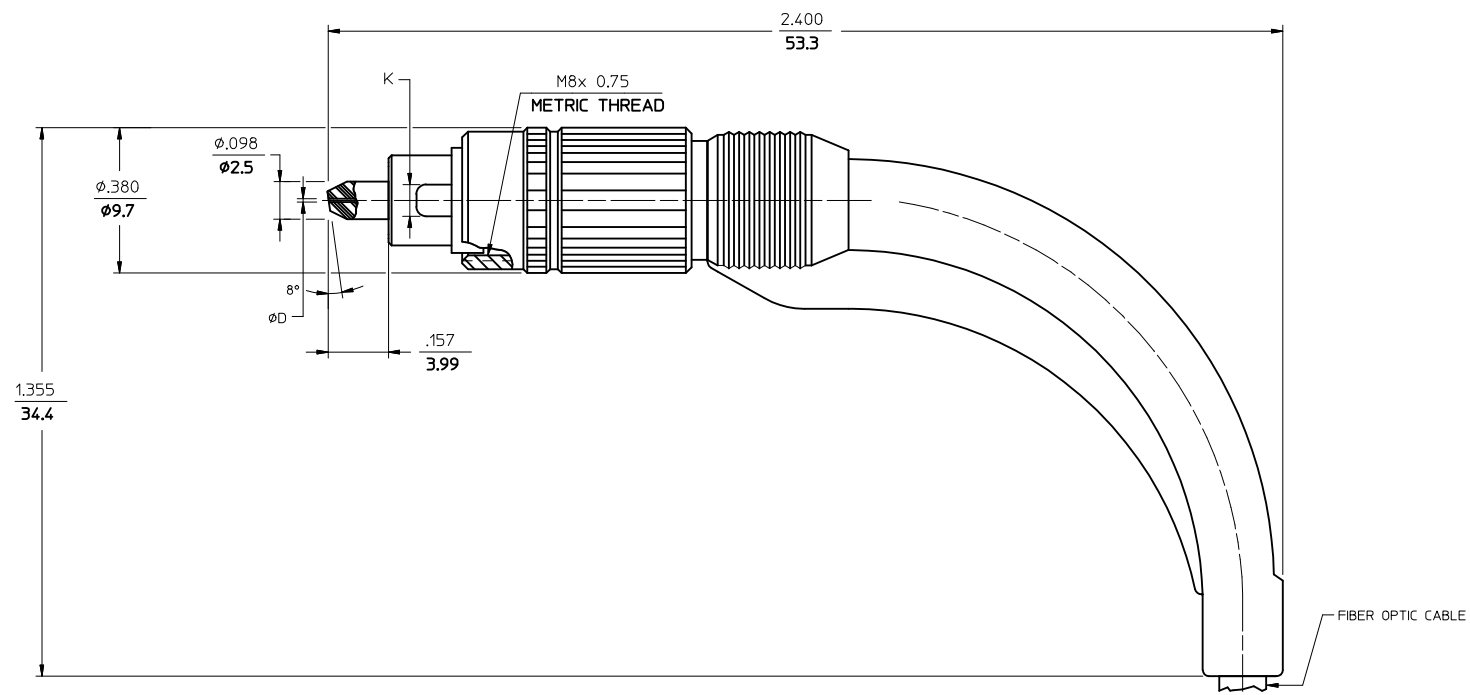

NOTE:  
1. DUST CAP INCLUDED, BUT NOT SHOWN.

ENTER DESCRIPTION EC NO: MF2012-0610 DRWN: MGHAYERE 2012/06/06 CHKD: LGJMIN APPR: LGJMIN 2012/06/08	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	▼=0 ▽=0	mm INCH	IN/MM	4:1	INCH		
		4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- 0 PLACE ± ±	DRAWN BY DATE KP 2006/05/24 CHECKED BY DATE	TITLE FCII APC CONNECTOR WITH 90D BOOT			
		ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	APPROVED BY DATE ILG 2006/05/24 MATERIAL NO. SEE TABLE	DOCUMENT NO. SD-10605Y-YY00		SHEET NO. 1 OF 1	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							