
This document was generated on 02/04/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0010897241
Status: Active
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Breakaway Header, Dual Row, Vertical, High Temperature, 24 Circuits, Tin (Sn) Plating, 2.72mm PC Tail Length

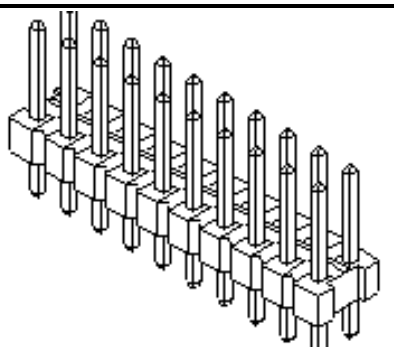

Series image - Reference only

Documents:

- 3D Model
- Drawing (PDF)
- 3D Model (PDF)
- Product Specification PS-70280-001 (PDF)
- Packaging Specification PK-70873-0353-001 (PDF)
- RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	70280
Application	Board-to-Board, Signal, Wire-to-Board
Overview	C-Grid Connector Products
Product Name	C-Grid
UPC	800753977716

Physical

Breakaway	Yes
Circuits (Loaded)	24
Circuits (maximum)	24
Color - Resin	Black
Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.883/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	2.79mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	2.54mm
Plating min - Mating	3.810µm
Plating min - Termination	3.810µm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

EU ELV
Not Relevant

EU RoHS | **China RoHS**
Compliant

REACH SVHC
Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free Status
Low-Halogen

For more information, please visit Contact US

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
70280 Series

Electrical	
Current - Maximum per Contact	3.0A
Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	245
Material Info	
Engineering Number	A-70280-0012
Reference - Drawing Numbers	
Packaging Specification	PK-70873-0353-001
Product Specification	PS-70280-001
Sales Drawing	SDA-70280-0001-4000-001

This document was generated on 02/04/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION