0097-0983

DWG NO:

CHECKED: DATE:
LP 07/19/99
APPROVED: DATE:
PVH 07/19/99 TO DPH 353 MIN ANGULAR **TECHNOLOGIES**  $\pm 3^{\circ}$ USING A 500 GRAM LOAD THIRD ANGLE PROJECTION AFTER: CARD GUIDE CLIP-ON REF. DWG. NO. SH: BRIGHT TIN PER MIL-T-10727 .0002" ± .0001" INCH | SCALE: DWG. NO. 0097-0983 [ MM ] 15:1 04 SHEET I OF I CAD MAINTAINED DRAWING. MANUAL CHANGES UNAUTHORIZED.


DECIMAL 2 PL'S  $\pm$  .01


DECIMAL 3 PL'S  $\pm$  .005


NOTE: CIRCLED DIMENSIONS ARE CRITICAL TO FUNCTION IN PROCESS INSPECTION IS REQUIRED FOR THESE


AND FIT. DIMENSIONS.	MATERIAL: .006 ±.0002 x .?? ±.00? ALLOY 25 BECU 1/4H (TD01)
	HEAT TREAT: TO DPH 353 MIN USING A 500 GRAM LOAD
	THICKNESS AFTER:


. 0 | 4 —

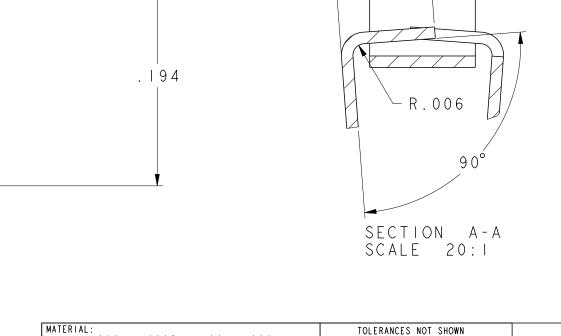

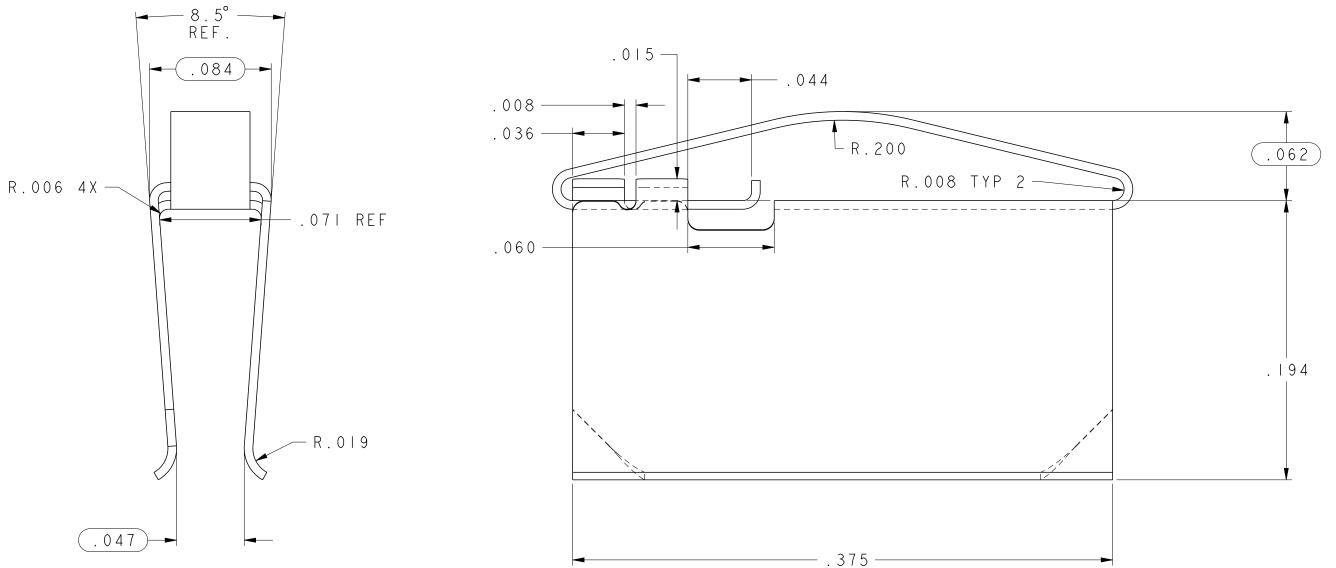

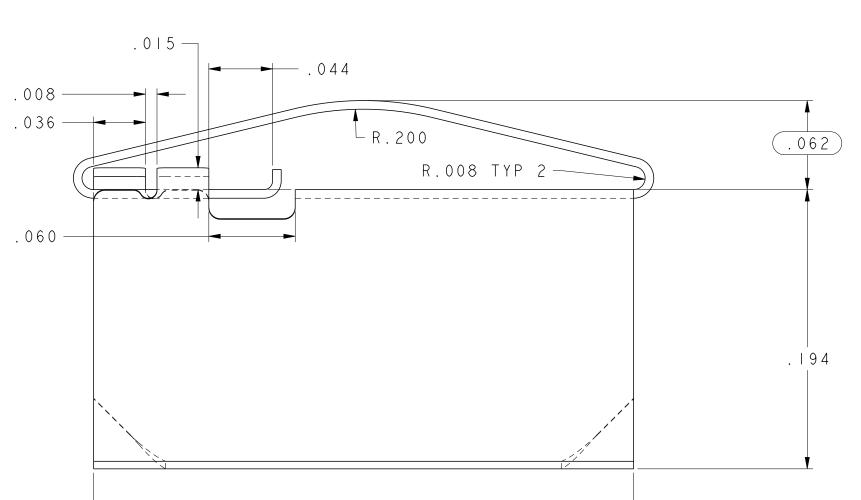

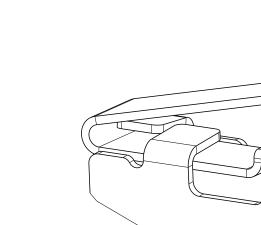





SCALE 15:1

. 05 —

SCALE 6:1

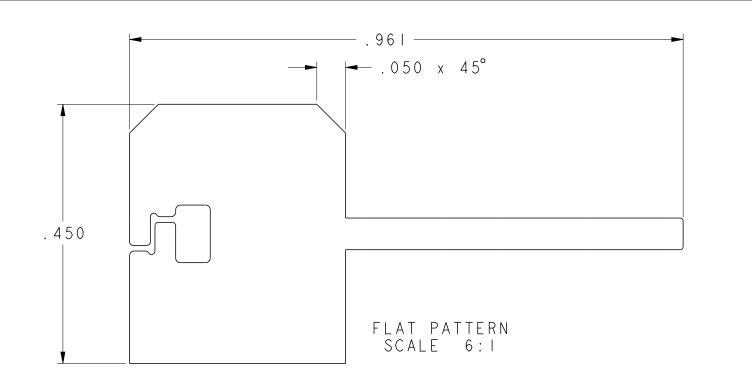

. 055

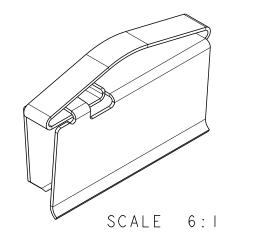

DWG NO:	
0097-0983	
REVISIONS	
MOVED "D" LANCES	
DOWN	02
ECO-E2719 UPDATED DRAWI PER WHS DRAWING.	NG
FAK 02-05-02 EWS 02-05-02	03

	0001 0000	
	REVISIONS	
ED	"D" LANCES	

ECO# AZIII352 DG 4-01-11 .084 WAS .080, .048 WAS .050, .450 WAS .447,INSPECTION NOTE 0 4

0.3

DRAWN BY: DATE: PVH 06/22/99

Laird

REVISIONS				
MOVED DOWN	_	LANCES		