




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| | | | | |
|------|---------------|------------|------------|----------------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| B | LEN17A0178-80 | 2017/09/15 | Mars Huang | Change Strain Relief |
| | | | | |

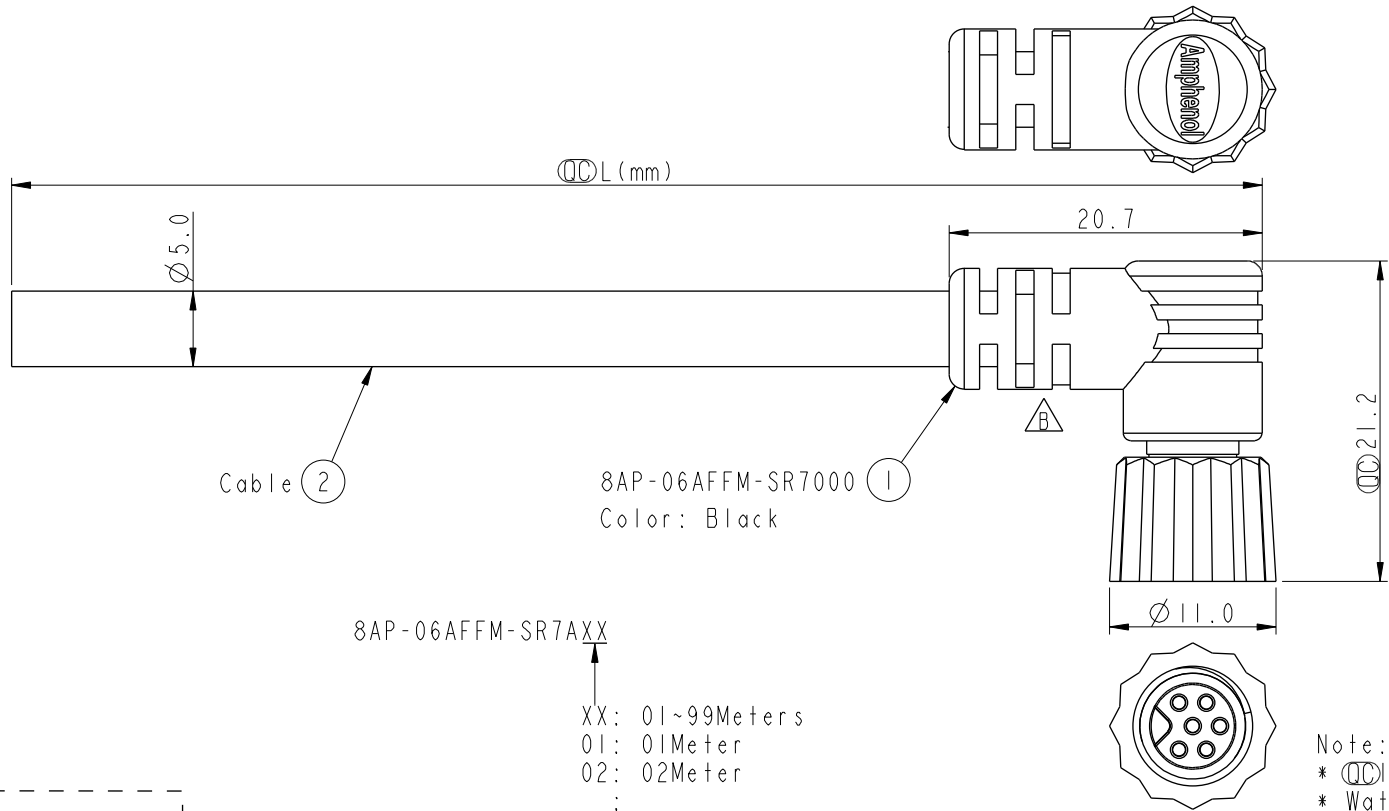

- Note:
- * \varnothing Important Dimension.
 - * Waterproof Rate: IP67.
 - * Connector: PU, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Nylon+GF, Black.
 - * O-Ring: Viton, Green.
 - * Cable: UL2464 24AWG*6C+Al/Mylar, PVC Jacket, UV Resistant, OD=5.0, Black.
 - * Cable Length Tolerance: 01M: ±40mm
02~05M: ±60mm
06~10M: ±100mm
11~30M: ±200mm
31~99M: ±500mm

8AP-06AFFM-SR7AXX
 XX: 01~99Meters
 01: 01Meter
 02: 02Meter
 ...
 99: 99Meters
 Cable Length(L): 01~99Meters



| | |
|-------|------------|
| 6 | Green 綠 |
| 5 | Yellow 黃 |
| 4 | Orange 橘 |
| 3 | Red 紅 |
| 2 | Brown 棕 |
| 1 | Black 黑 |
| Conn. | Wire Color |

Pin Out

| | | | | | | | | | |
|---------------------------------|--------------------------------------|----------------|-------------------------------|--|---------------------------------|------------------------|-----------------------------|---------------------------|--------------------|
| UNIT:mm TOLERANCE ±0.5 mm | TITLE M8 6Pin Cable F Conn. F Pin | | Amphenol LTW 安費諾亮泰企業股份有限公司 | | ITEM NO | DRAWN BY Mars Huang | DATE 2017/09/15 | | |
| | SCALE 2:1 | SIZE A4 | | | SHEET 1 | OF 1 | DWG NO 8AP-06AFFM-SR7AXX | CHECKED BY Victor Hung | DATE 2017/09/15 |
| | REV. B | WC-REV. A.4 | | | \varnothing : Inspection item | | CUSTOMER ALTW | APPROVED BY Kevin Hu | DATE 2017/09/15 |