


	<u>1</u>	
Part Number:	DRAWN	0/7/2017
TE122402 1	CJ	9/7/2017
IE122403-1	CHECKED	9/7/2017
	P.D.	3/7/2017
Description: Electro-Mechanical Indicator	APPROVED	0/7/2017
Liecti o-Mechanicai Indicatoi	C.E.	9/7/2017

This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com


Top View

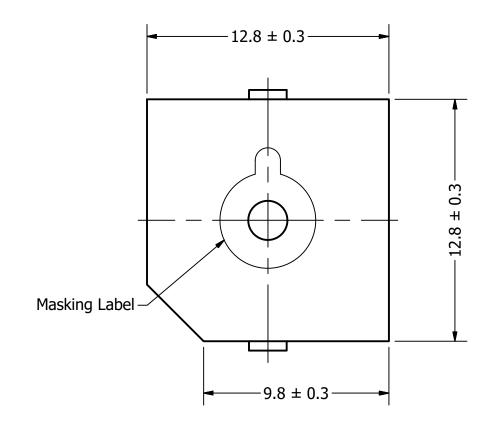


2

Housing Material

Side View

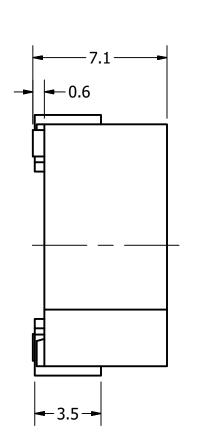

Bottom View

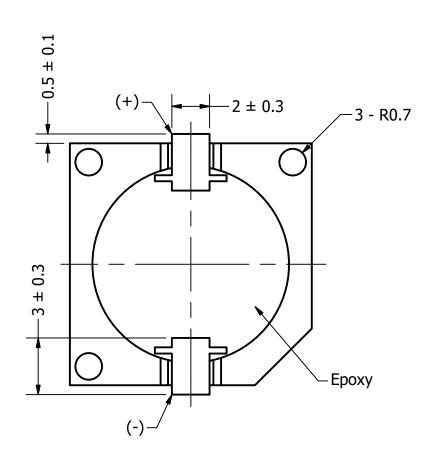

4) Subject to change or redrawn without notice

Items	Specifications	Conditions				
Min. Sound Pressure Level	75	dB (@ 10cm)				
Tone	Single		REVISION HISTORY			
Resonant Frequency	$2,400 \pm 400$	Hz	REV	DESCRIPTION	DATE	APPROVED
Rated Voltage	3	V		Released from Engineering	10/21/2013	J.S.
Voltage Range	2 ~ 5	V		Updated template, corrected height, added polarity	10/21/2015	J.S.
Max. Rated Current	30	mA	1	markings	9/7/2017	C.E.
Storage Temperature	-40 ~ +85	°C	NOTES			
Operating Temperature	-30 ~ +70	°C	1) All dimensions are in mm unless otherwise noted			
Connection Method	Surface Mount Pads		2) All tolerances are ± 0.5 mm unless otherwise noted			
Mount Type	Surface Mount		3) All parts meet RoHS			

3 4 2