

MIRA-WW

~60° wide beam

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 32.4 mm
Height	14.7 mm
Fastening	glue
ROHS compliant	yes ⓘ


MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
MIRA-WW	Single lens	PC	clear	



ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C12502_MIRA-WW » Box size: 480 x 280 x 300 mm	840	120	60	7.3

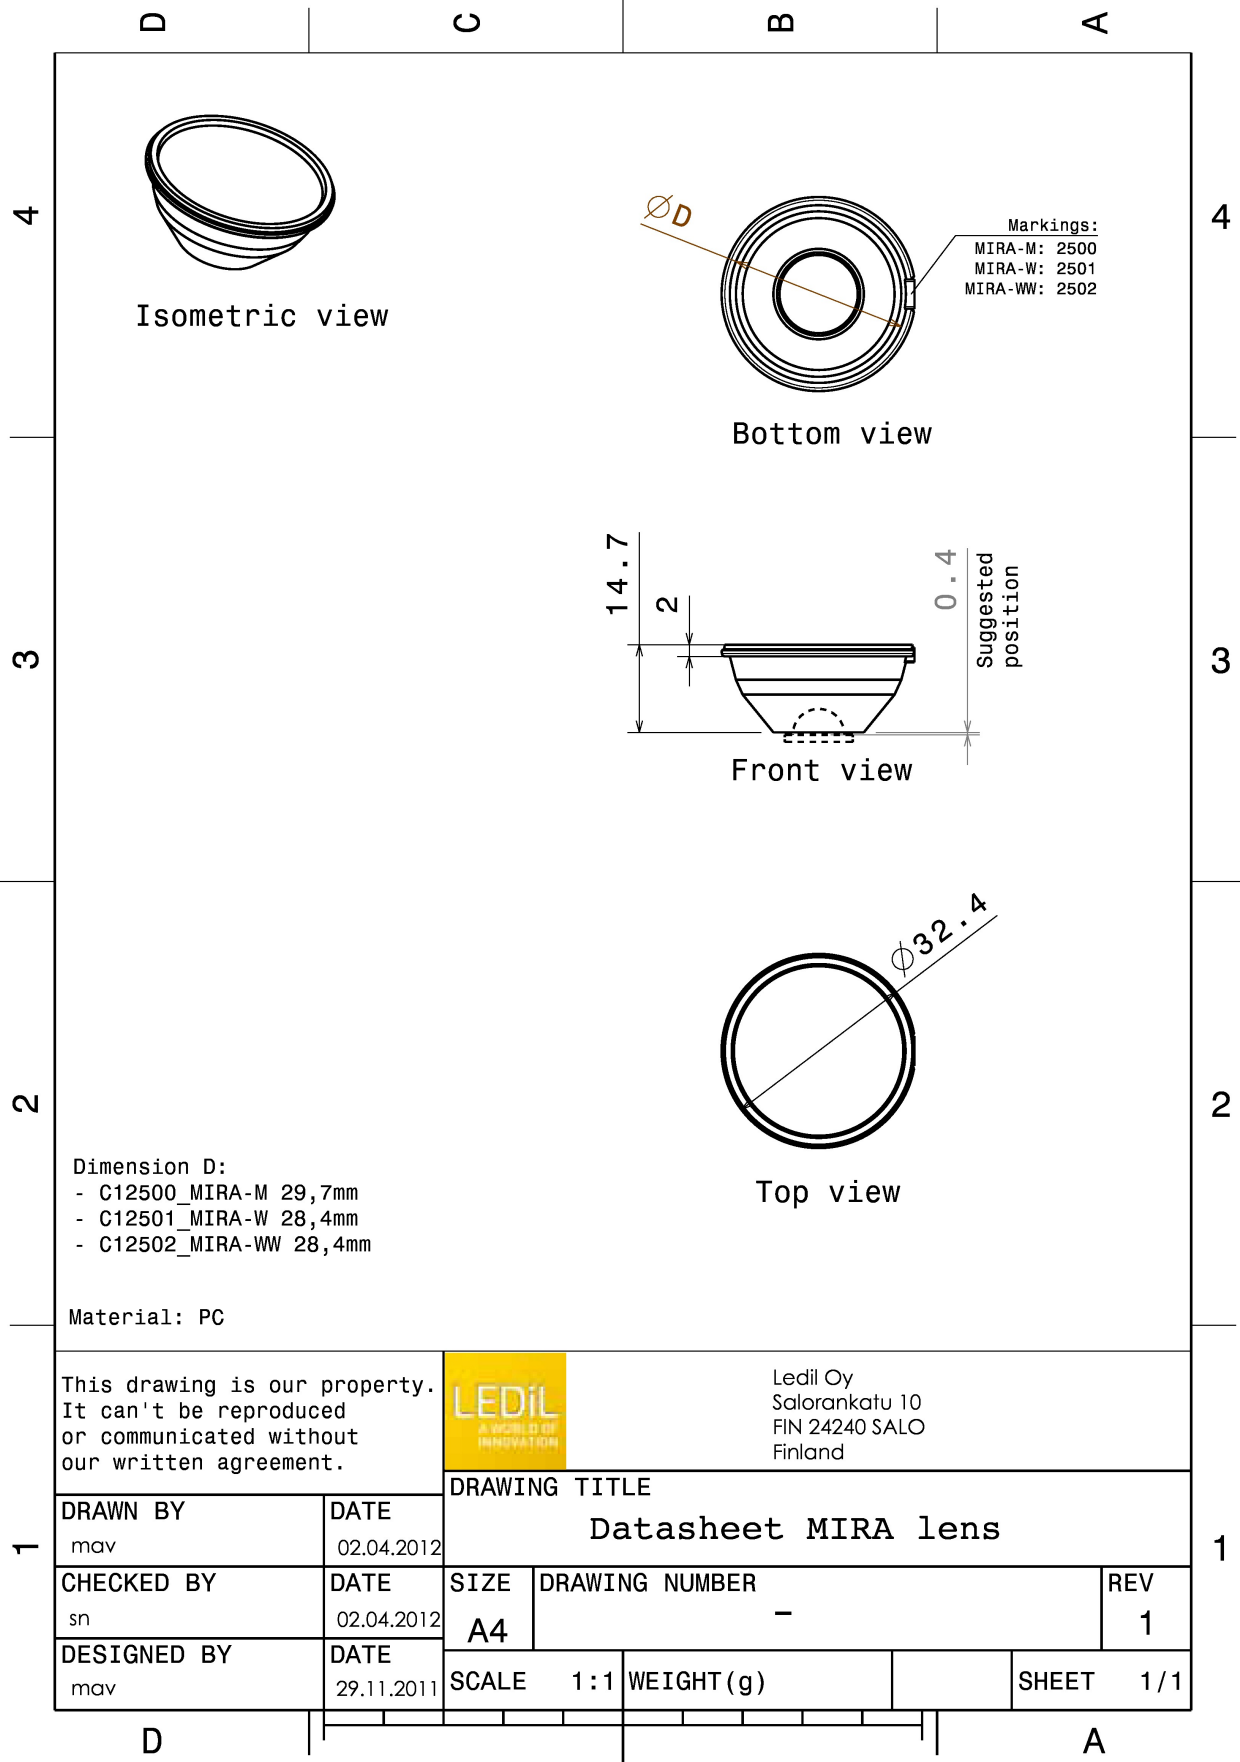

See also our general installation guide: www.ledil.com/installation_guide

PHOTOMETRIC DATA (MEASURED):

bridgelux.

LED	BXRA ES Star
FWHM / FWTM	54.0° / 88.0°
Efficiency	83 %
LEDs/each optic	1
Light colour	White
Required components:	




bridgelux.

LED	V10 Gen6
FWHM / FWTM	56.0° / 92.0°
Efficiency	78 %
Peak intensity	0.9 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	





CREE → LED

LED	CXA/B 15xx
FWHM / FWTM	53.0° / 87.0°
Efficiency	84 %
Peak intensity	1.1 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

CREE → LED



LED	MHD-E/G
FWHM / FWTM	61.0° / 97.0°
Efficiency	81 %
Peak intensity	0.7 cd/lm
LEDs/each optic	1
Light colour	White
Required components:	

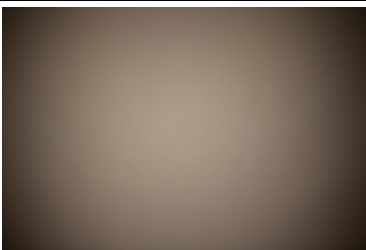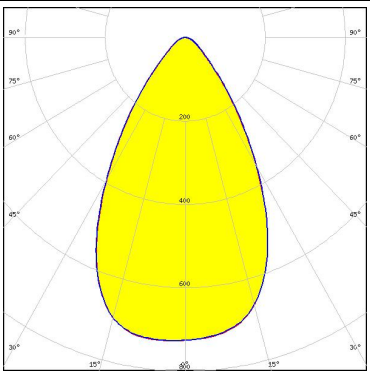PHOTOMETRIC DATA (MEASURED):


CREE LED

LED MT-G
 FWHM / FWTM 58.0° / 92.0°
 Efficiency 81 %
 Peak intensity 0.9 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

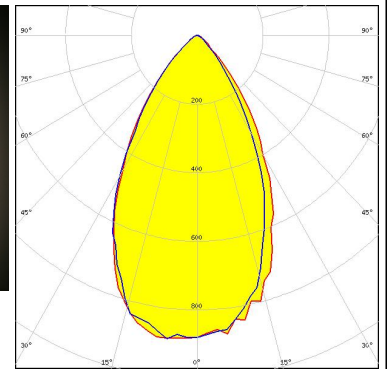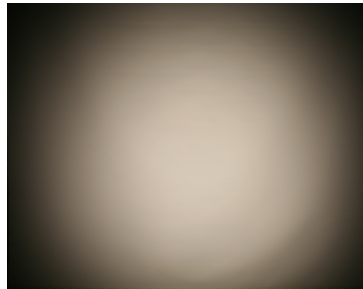


CREE LED

LED XHP70
 FWHM / FWTM 61.0° / 94.0°
 Efficiency 82 %
 Peak intensity 0.8 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

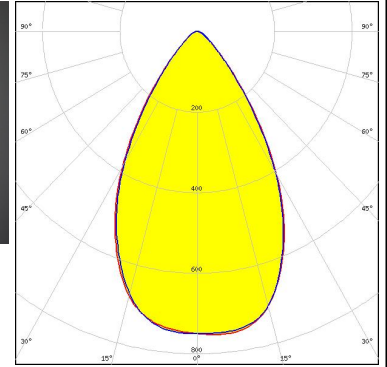



LUMILEDS

LED LUXEON M/MX
 FWHM / FWTM 57.0° / 90.0°
 Efficiency 82 %
 LEDs/each optic 1
 Light colour White
 Required components:


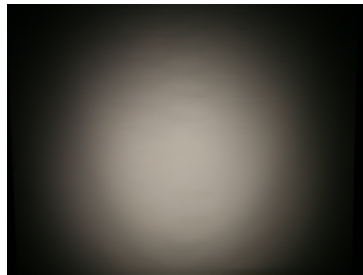

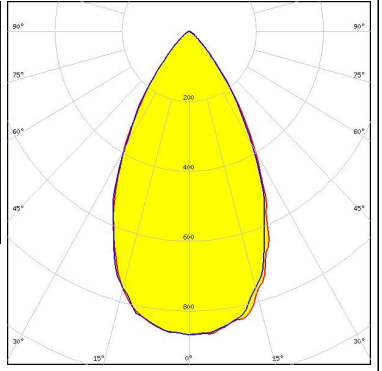
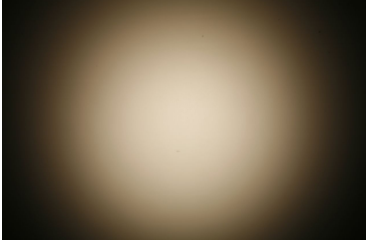
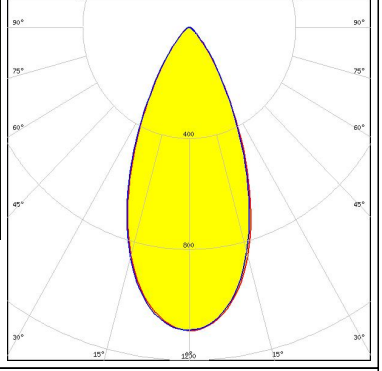
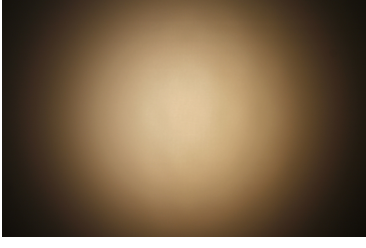



LUMILEDS

LED LUXEON MZ
 FWHM / FWTM 49.0° / 82.0°
 Efficiency 81 %
 Peak intensity 1.2 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

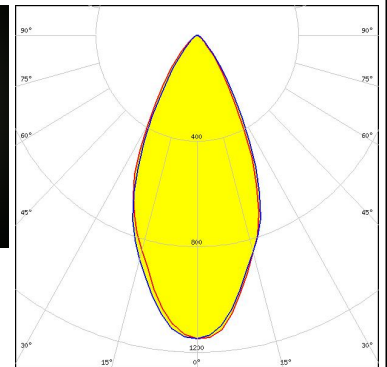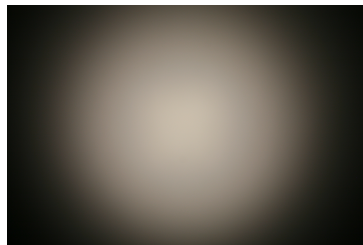


PHOTOMETRIC DATA (MEASURED):
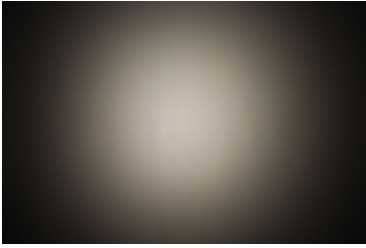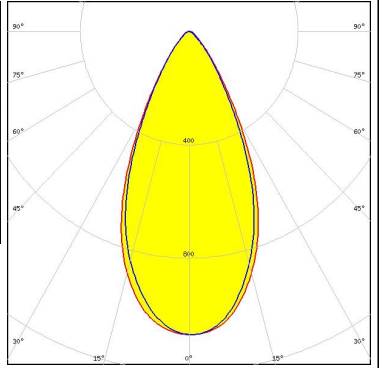
<p>NICHIA</p> <p>LED NFMW48xA FWHM / FWTM 50.0° / 83.0° Efficiency 82 % Peak intensity 1.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NSCxL036A FWHM / FWTM 57.0° / 89.0° Efficiency 79 % Peak intensity 0.9 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>NICHIA</p> <p>LED NSMx286M FWHM / FWTM 47.0° / 80.0° Efficiency 76 % Peak intensity 1.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		
<p>OSRAM <small>Opto Semiconductors</small></p> <p>LED Duris S10 FWHM / FWTM 54.0° / 84.0° Efficiency 86 % Peak intensity 1.1 cd/lm LEDs/each optic 1 Light colour White Required components:</p>		

PHOTOMETRIC DATA (SIMULATED):




LED VERO10
FWHM / FWTM 51.2° / 84.8°
Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

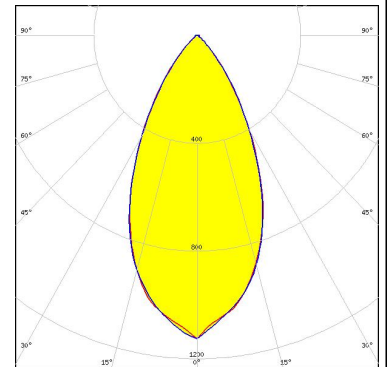


LED LUXEON 5258
FWHM / FWTM 54.0° / 76.0°
Efficiency 92 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:




LED LUXEON 7070
FWHM / FWTM 69.0° / 94.0°
Efficiency 88 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

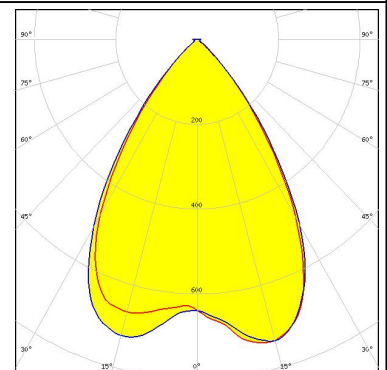

LED OSCONIQ P 7070
FWHM / FWTM 67.0° / 102.0°
Efficiency 92 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:



Detector Image: Illuminance
 24.0.2019
 Scenario: 10_000_Surface_1
 1121 1000 000 v 0 000 000 v 1121000000, P1x420 100 v 100 m, Total Iccs = 878000
 Max. Illuminance: 0.11210000 Lumens/m²
 Total Power: 1.0 00000000 Lumens
 C12502_MIRA-WW_000125_P010.dwg
 Configuration: 1 of 1

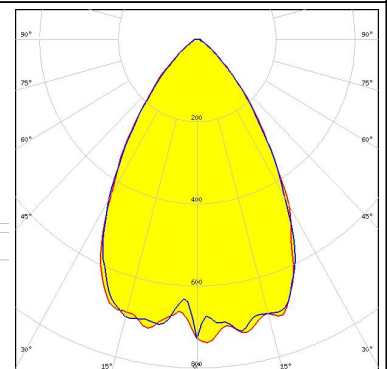

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)