www.lemo.com

EGG.1R.803.GLM81

SUMMARY

Wires

Low voltage	**3**
Coax	**8**



Image is for illustrative purpose only

Series	1R
Termination type	Female crimp
IP rating	50
AWG wire size	0.00 - 0.00
Cable Ø	2.00 - 9.20 mm
Status	active
Matching parts	FGG.1R.803.GLC8192

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model	EGG*: Fixed receptacle, key (G) or key (A)
Keying	3 keys (alpha=50,beta=30, plug: male contacts, receptacle: female contacts)
Housing Material	Crastin® PBT (Polybutylene terephthalate), gray
Weight	22.34 g

Performance

Configuration	1R.803 : 8 Coax (50 Ohm), 3 Low V.
Insulator	L: PEEK (UL 94 / V-0/1.5)
Rated Current	3.0 Amps

Specifications


Impedance: 50
Test Voltage (kV rms): 1.5


Others

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

DRAWINGS



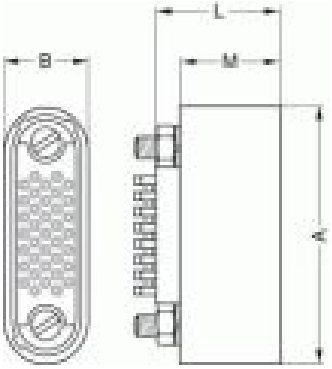



Dimensions

	A	B	C	E	G	L
mm.	24.5	10.5	34.5	3.2	2.2	31.5
in.	0,96	0,41	1,36	0,13	0,09	1,24

RECOMMENDED BY LEMO

Tools

Crimp Tool:	DPC.91.701.V
Crimp Tool 2:	DPE.99.003.1K
Crimp settings:	AWG/Selector = 20-22-24/6-5-5
Positionner:	DCE.91.090.BVM
Extractor:	DCF.91.090.2LT
Extractor 2:	DCF.91.270.1LT
Replacement contact:	EGG.0B.660.ZZM

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.