www.lemo.com

FCZ.T7.675.CTA01S

SUMMARY

Wires

Triax	1



Image is for illustrative purpose only

Series	T7
Termination type	Male solder
IP rating	68
AWG wire size	0.00 - 0.00
Cable Ø	0.00 - 0.00 mm
Status	active

Download

Request a quote

Catalog

TECHNICAL DETAILS

Mechanics

Shell Style/Model	FCZ*: Fixed plug, crimp, nut fixing
Keying	Circular, male
Housing Material	Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces
Weight	104.22 g

Performance

Configuration

Insulator

Rated Current

Specifications

Contact Type: Solder


Others

Endurance (Shell): 5000 mating cycles
Temp (min / max): -55°C / +250°C
Humidity (max): <=95% [at 60 deg C /140 F]
Vibration: 15 g [10 Hz - 20000 Hz]

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Shock Resistance: 100 g [6 ms]
Salt Spray Corrosion: >1000 hr

DRAWINGS

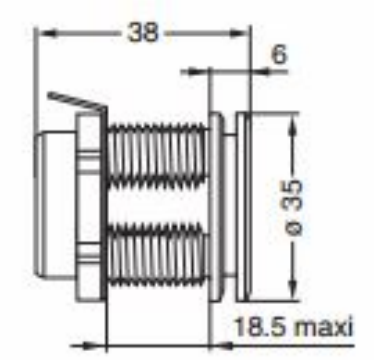



Dimensions

	A	E	L	M	e
mm.	35	18.5	38	6	M28x1.0
in.	1,38	0,73	1,50	0,24	

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.