


NOTES: UNLESS OTHERWISE SPECIFIED

1. CONSTRUCTION


- "N" CONNECTOR BODY & FITTINGS: NICKEL PLATED BRASS
- "N" CONNECTOR PIN: GOLD PLATED BRASS.
- "N" CONNECTOR DIELECTRIC: PTFE
- HOUSING: MOLDED NYLON. AVAILABLE IN BLK.
- CENTER CONDUCTOR: 20AWG POLYETHYLENE INSULATION.  
TINNED COPPER STRANDING.
- BANANA PLUG: NICKEL PLATED BRASS.
- BANANA PLUG CONTACT: NICKEL PLATED BeCu OR PHOSPHOR BRONZE
- HARDWARE: STAINLESS STEEL SCREW.

2. PERFORMANCE:

- "N" CONNECTOR ONLY:
  - IMPEDENCE: 50 OHMS
  - FREQUENCY RANGE: 0-11 GHz
  - VSWR: 1.3 MAX. @ GHz
  - INSERTION LOSS: .06 dB MAX. X f(GHz)
  - WORKING VOLTAGE: 1k V RMS @ SEA LEVEL
  - TEMPERATURE RANGE: -65°C TO 85°C
  - INSULATION RESISTANCE: 5k M OHMS MIN.
- ADAPTER HOUSING:
  - IS NOT RF SHIELDED AND HAS NO FREQUENCY RATING

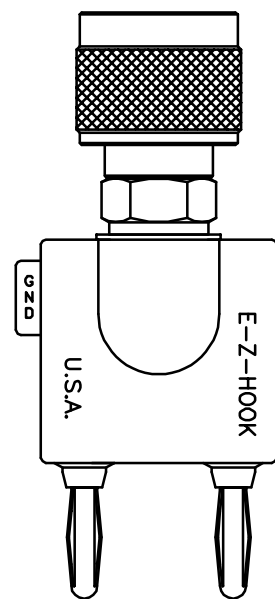

ACTUAL SIZE

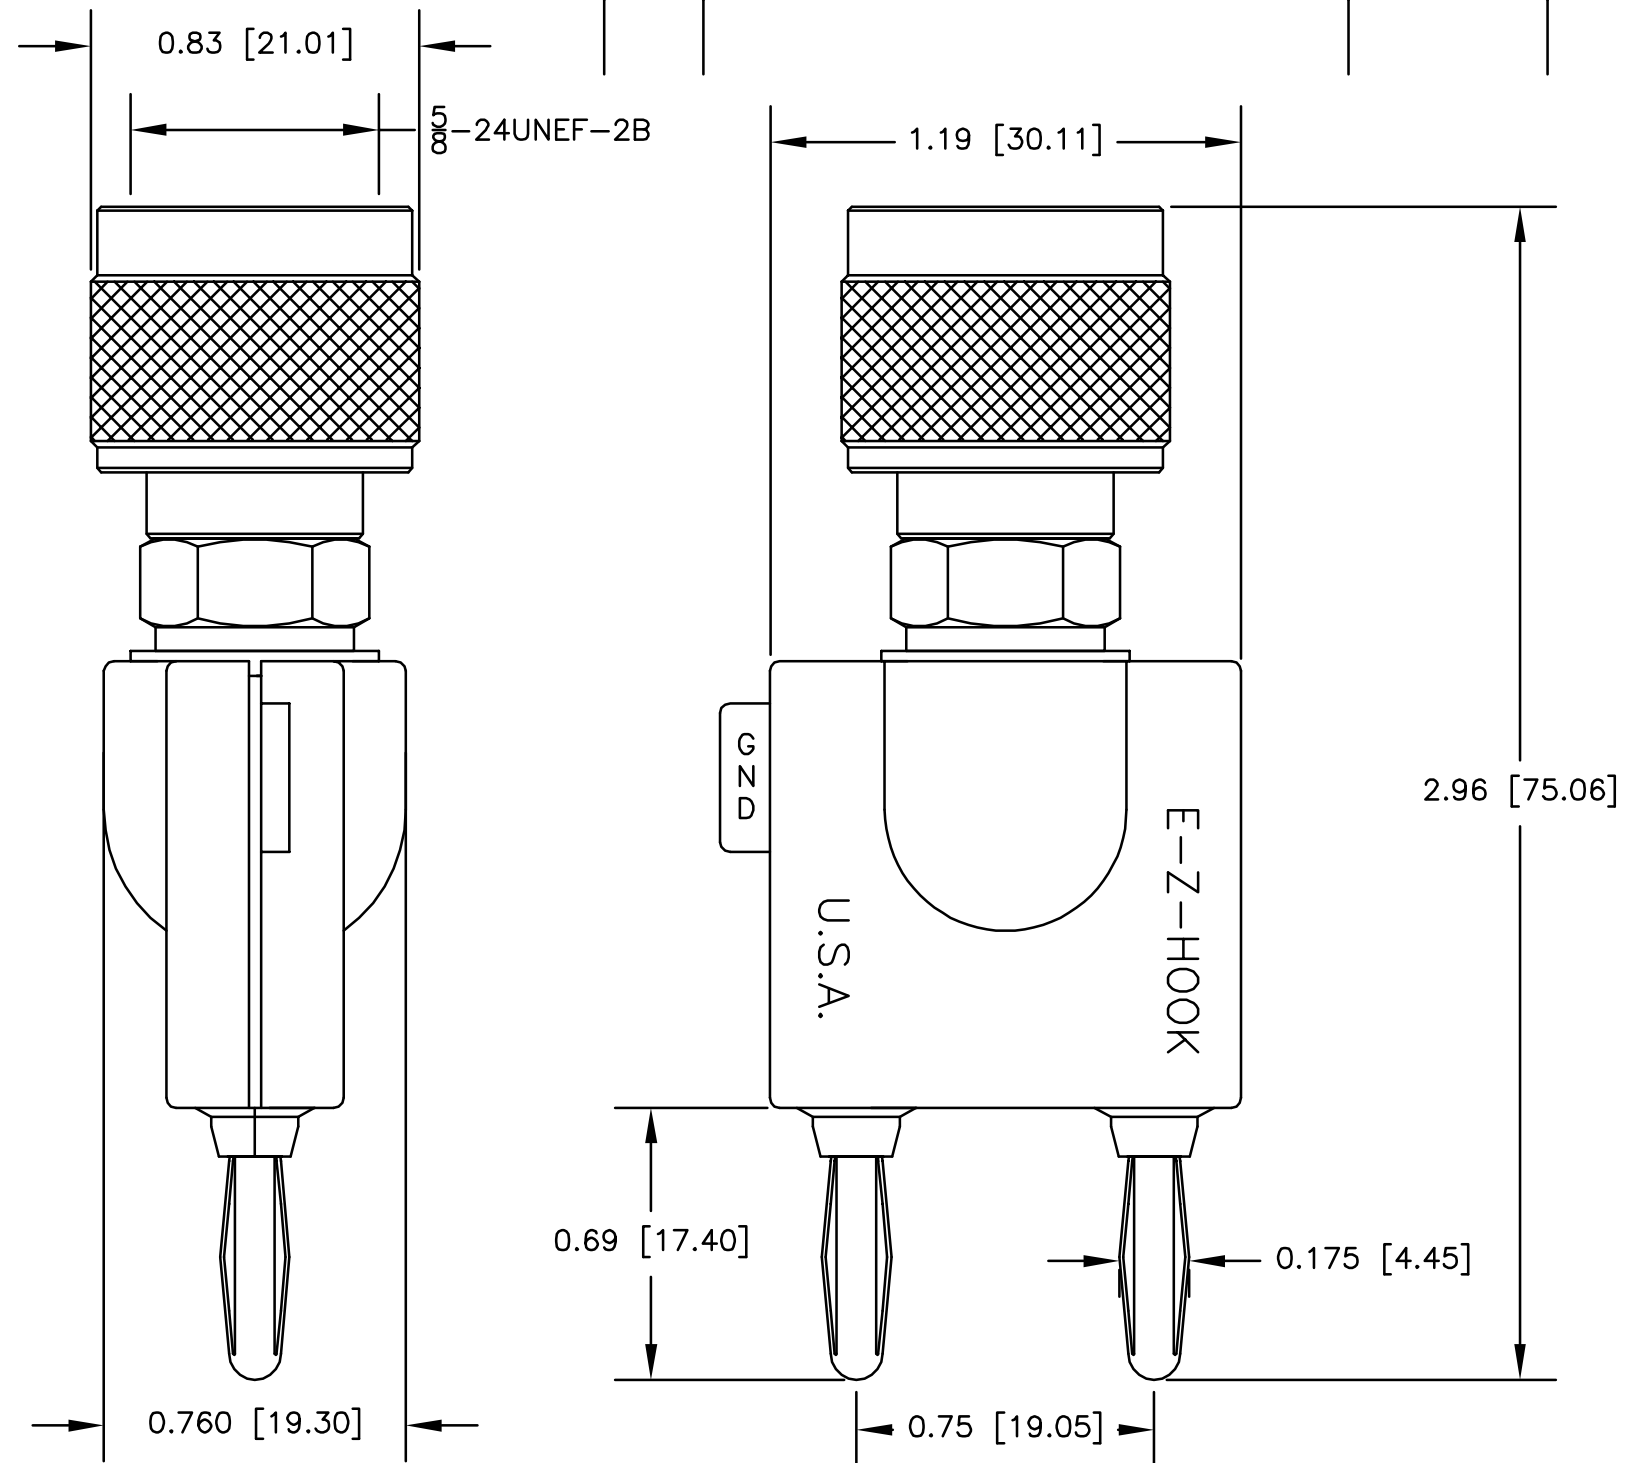

LTR	DESCRIPTION	DATE	APPROVEI

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± N/A .XX ± N/A ± N/A .XXX ± N/A		CONTRACT NO.		<b>E-Z-HOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
MATERIAL SEE NOTE		APPROVALS	DATE		
FINISH SEE NOTE		DRAWN R.L.	5/17	DESCRIPTION TYPE "N" MALE CONNECTOR TO DBL BAN PLUG ADAPTER	
NEXT ASSY		USED ON	APPROVED BY		
APPLICATION		DO NOT SCALE DRAWING		SIZE	CODE IDENT NO.
				B	08505
				DRAWING NO.	REV
				9415	
				SCALE	
				2:1	
				SHEET 1 OF 1	