


# OA109EC




AC Fan, 115V/230V Universal Input  
120x38mm (4.7" x 1.5")

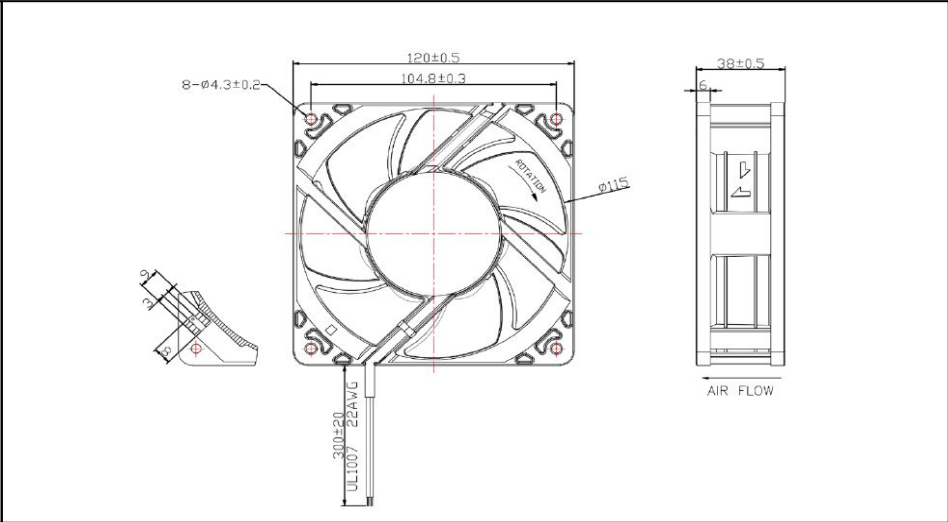

Frame	PBT UL94V0- Plastic
Impeller	PBT UL94V0- Plastic
Connection	2x Lead wires (300mm) or Terminals
Motor	EC motor, Electronically Protected
Bearing System	Dual Ball Bearings
Dielectric Strength	1 sec at 1800 VAC, 50/60Hz
Insulation Resistance	>10M ohm between leadwire and frame (500VDC)

<u>Operating Temperature</u> -20°C ~ +70°C
<u>Storage Temperature</u> -20°C ~ +75°C
<u>Life Expectancy</u> 60,000 hours (L10 at 40°C)
Weight: 0.64 lbs
m2

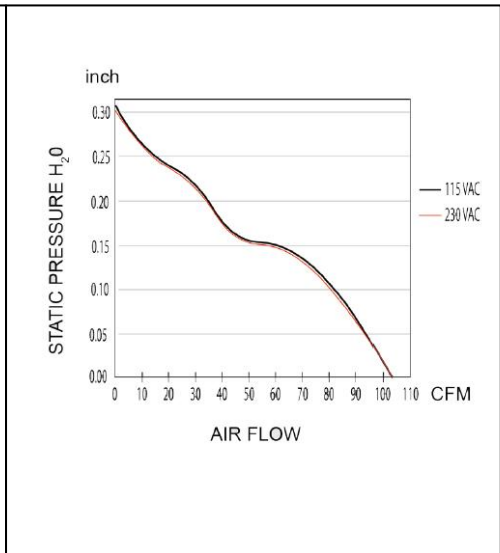

Part Number	OA109EC-UR-1*B
Nominal Voltage	115/230 Universal Input
Voltage Range	90 ~ 265 VAC
Nominal Power	4.9W @ 115V, 5.2W @ 230V
Rated Current	.08A @ 115V, .06A @ 230V
Rated Speed (RPM)	3200
Airflow (CFM)	106
Noise Level (dB)	43
Max. Static Pressure	0.34"H <sub>2</sub> O

\*Indicate "T" (Terminal), or "W" (12" Wire Leads)