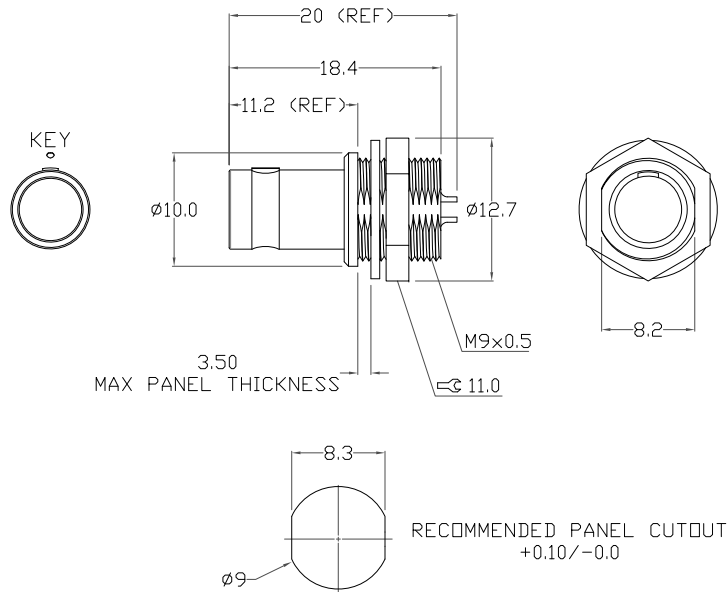



**820BYYY-103R001**

SERIES _____
 POSITIONS _____
 YYY = SEE POSITION CHART
 GENDER _____
 1 = MALE _____
 TYPE _____
 0 = SOLDER CUP PANEL MOUNT (NON-LATCH)
 KEY ORIENTATION _____
 3 = 1 KEY // 0°
 CONTACT PLATING _____
 1 = 7μ" GOLD PLATED

MATERIALS:

SHELL: CHROME PLATED BRASS
 CONTACTS: 7μ" GOLD PLATED BRASS
 NUT: CHROME PLATED BRASS
 INSULATOR: PPS

MECHANICAL:

MATING CYCLES: 5000 CYCLES
 OPERATING TEMP: -40°C TO 200°C
 SHIELDING: 75dB @ 10MHz // 40dB @ 1GHz
 IP RATING: 50
 MAX TORQUE: 2.5 Nm

POSITION CHART // ELECTRICAL/WIRE SPECIFICATIONS

POSITIONS	CONTACTS	CONTACT Ø	MAX CONTACT mΩ	WORKING VOLTAGE	MAX AMPERAGE	MAX WIRE AWG
002		0.90mm	6.0 mΩ	330 V	10.0 A	22
003		0.90mm	6.0 mΩ	400 V	8.0 A	22
004		0.70mm	7.5 mΩ	280 V	7.0 A	24
005		0.70mm	7.5 mΩ	280 V	6.5 A	24
006		0.50mm	10.0 mΩ	280 V	2.5 A	28
007		0.50mm	10.0 mΩ	260 V	2.5 A	28
009		0.50mm	10.0 mΩ	200 V	2.0 A	28

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:
M. SIGMON
DATE:
02/03/2016

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:
NTSSHEET OF
1 1REV
4

DWG NO.

820BYYY-103R001