
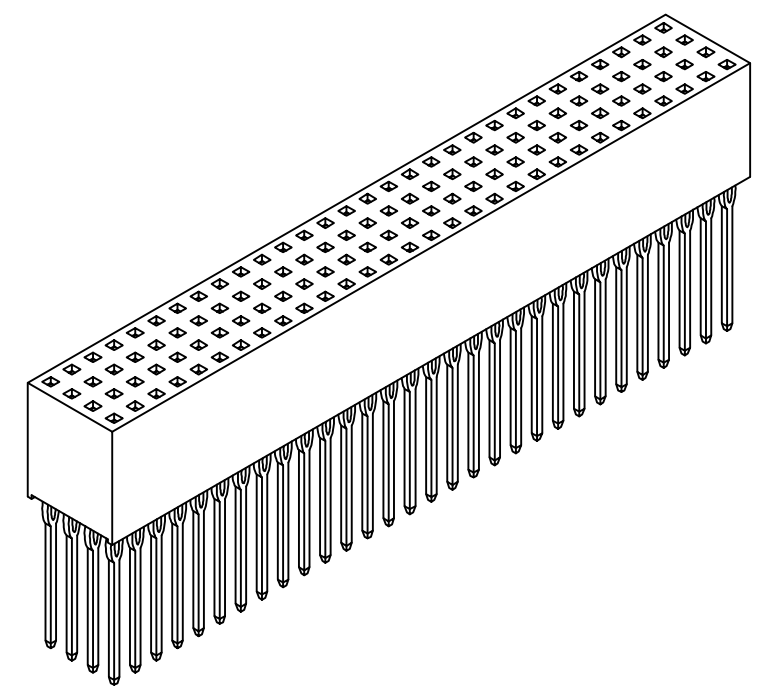




3M™ CONNECTOR FOR PC104 PLUS EMBEDDED SYSTEM APPLICATIONS, COMPLIANT

D
C
B
A

D
C
B
A


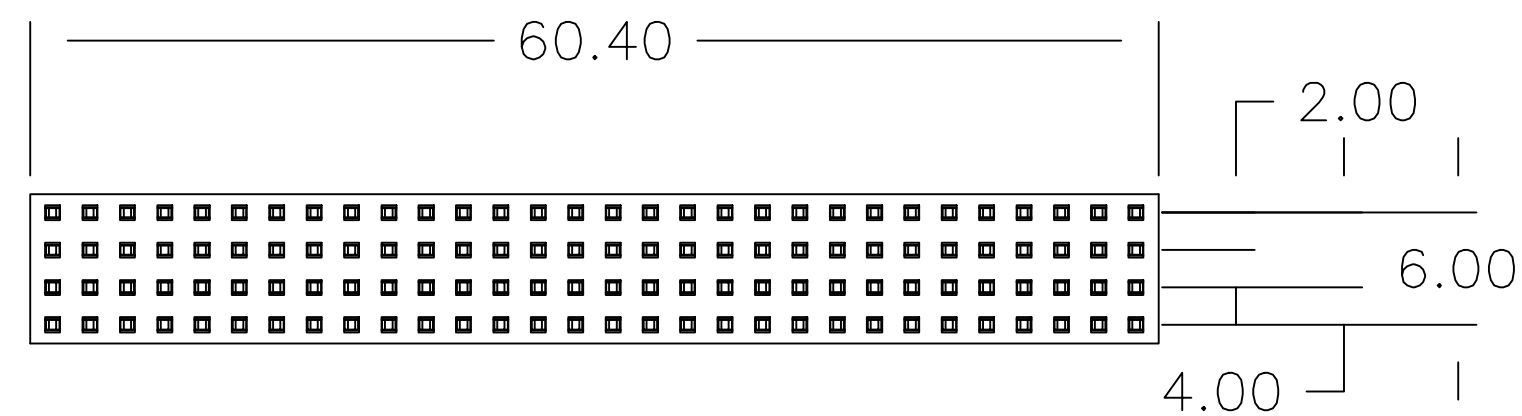


- NOTES:
- MATERIAL:
CONTACT MATERIAL: PHOSPHOR BRONZE
INSULATOR MATERIAL: POLYESTER NYLON-6T UL 94V-0
 - PLATING: $\mu\text{M}[\mu\text{"]}$
-DA
0.08[3] MIN Au FEMALE CONTACTS
0.08[3] MIN Au MALE CONTACTS
1.27[50] MIN Ni UNDERCOAT
-MG
0.38[15] MIN Au FEMALE CONTACTS
0.08[3] MIN Au MALE CONTACTS
1.27[50] MIN Ni UNDERCOAT
-SL
0.38[15] MIN Au FEMALE CONTACTS
2.54[100] MIN Sn NON-STACK-THRU TAILS
1.27[50] MIN Ni UNDERCOAT
 - CURRENT RATING: 2 AMPS
INSULATOR RESISTANCE: 5000 MEGA OHMS MIN
CONTACT RESISTANCE: 20 MILLIOHMS MAX
DIELECTRIC WITHSTAND: 500 VAC
OPERATING TEMPERATURE: -40°C TO +105°C
MAX PROCESSING TEMPERATURE; 230°C FOR 60 SECONDS
260°C FOR 10 SECONDS
 - SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "ROHS COMPLIANCE" SECTION OF: WWW.3MCONNECTOR.COM FOR COMPLIANCE INFORMATION (RIA E1 & C1 APPLY).
 - IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT SPEC., THE PRODUCT SPEC. TAKES PRECEDENT.
 - REFERENCE DOCUMENT 78-9101-3959-7
 - PART NO:

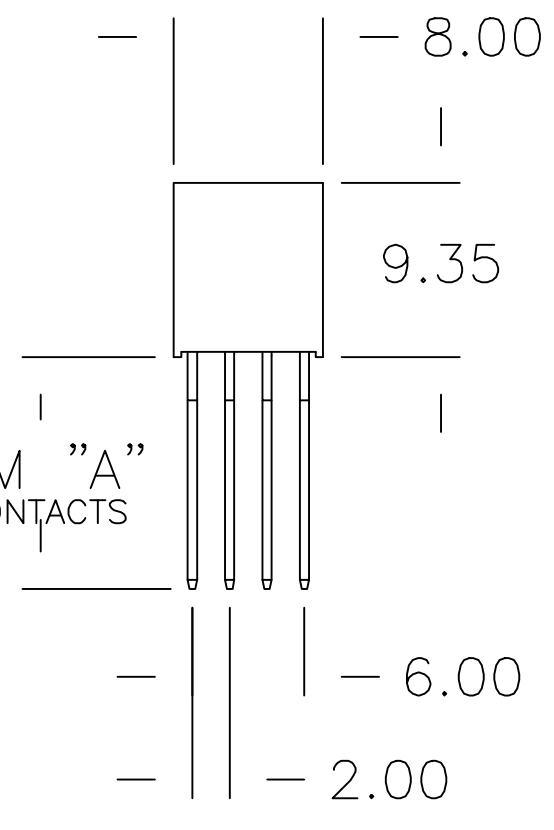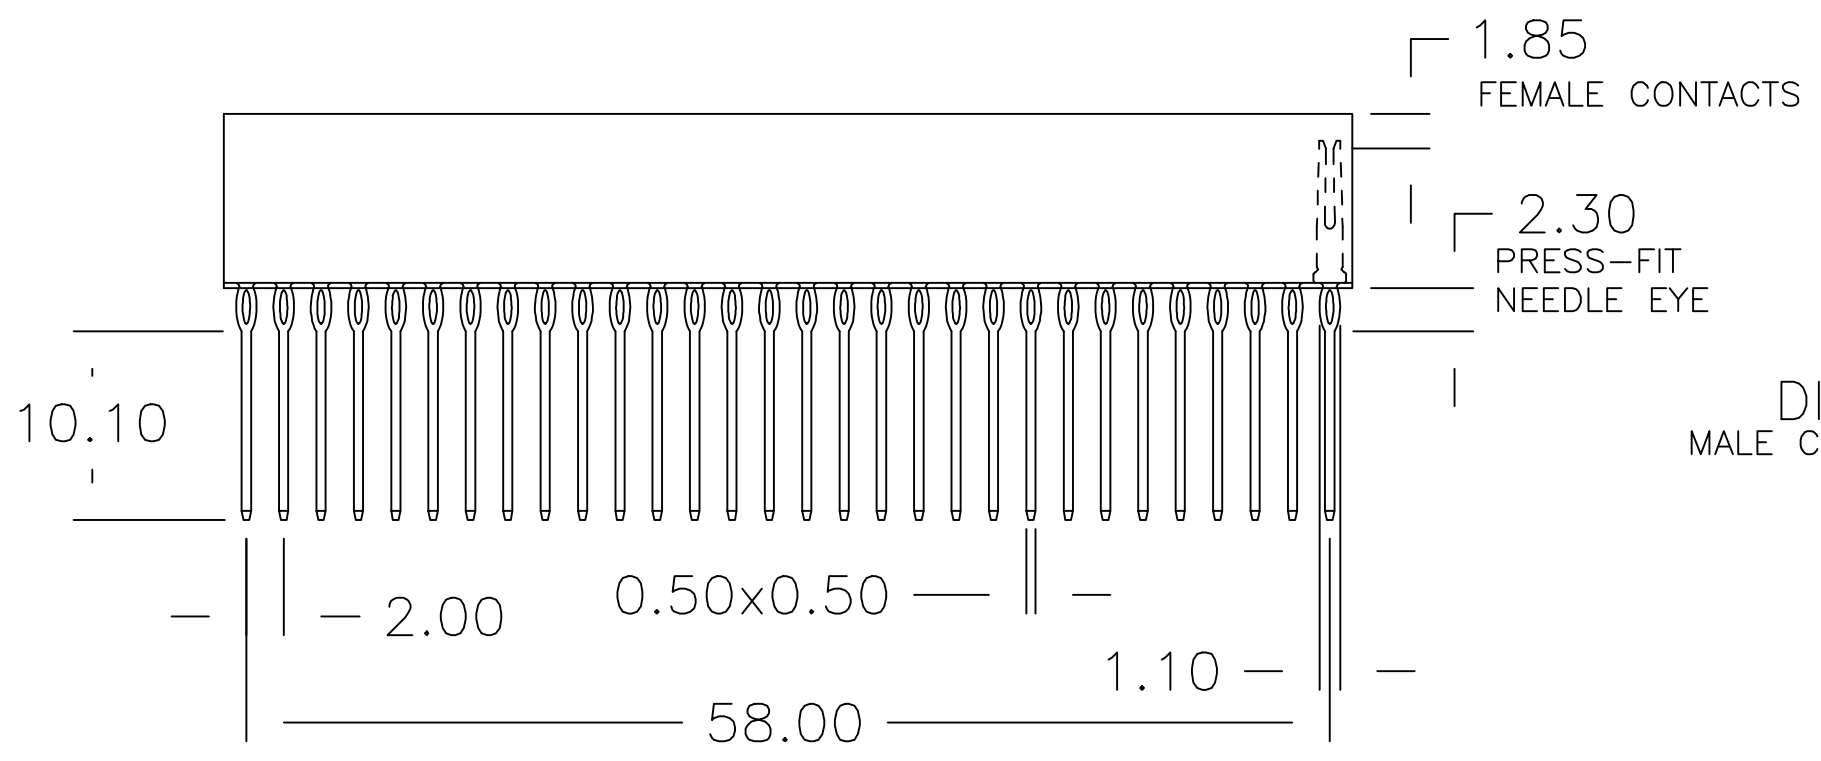

TYPE	PART NO.	DIM "A"	MIN STANDOFF	MAX STANDOFF
STACK-THRU PRESS-FIT	5P03-2021-XX	12.40	14.5	18.4
NON-STACK-THRU SOLDER	5P03-2012-XX	2.80	9.5	
NON-STACK-THRU PRESS-FIT	5P03-2011-XX	2.80	9.5	

-XX IS PLATING TYPE

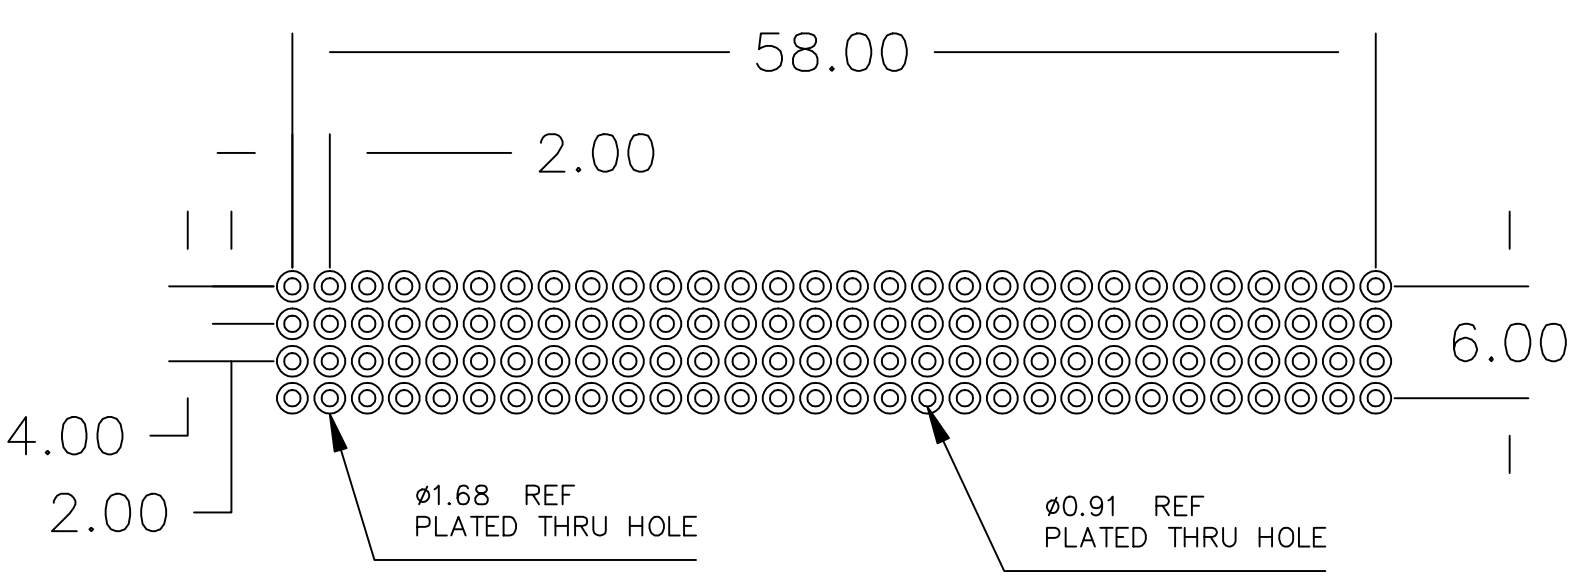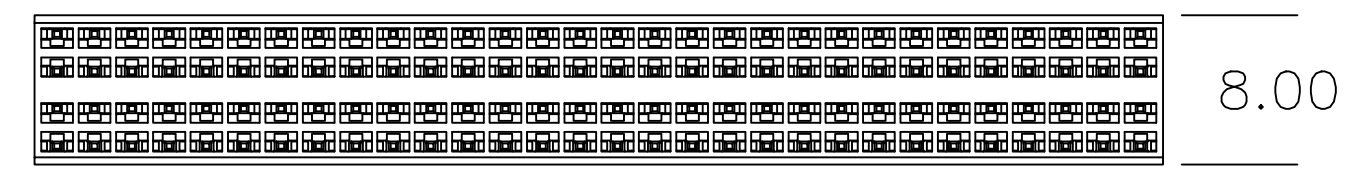

RECOMMENDED P.C.B LAYOUT
TOLERANCES: $\pm 0.05\text{mm}$

DESIGN REFERENCE		NEXT ASSEMBLY		B	33766	REMOVE 5P03-20022-XX FROM TABLE	MWL	TS
REV	ECO	DATE	ISSUE DATE AND DESCRIPTION	DRFT	DATE	MFG	DATE	CHKD
					02/02/11			
DISTRIBUTION CODES		ECO		CHKD	TS	DATE	APPVL	DATE
DIVISION		DIVISION CODE		3M Center St. Paul, MN 55144		© 3M COPYRIGHT This document is the copyrighted property of the 3M Company and may not be reproduced without 3M written permission or used for other than 3M authorized purposes.		
DO NOT SCALE DRAWING	SCALE	TOLERANCES EXCEPT AS NOTED		TITLE				
		INCHES		5P03-20XX-XX PC104 PLUS COMPLIANT, 120-PIN, CONNECTOR				
		MILLIMETERS		CAGE NUMBER				
		0 ±		78-5100-2391-0				
		.0 ± .3		DRAWING NO.				
		.00 ±		REV.				
		.000 ±		B				
		.000 ±		MODEL				
		ANGLES ±		SHT 1 OF 2				
MAX SURFACE ROUGHNESS		ALL SURFACES		DET. LISTS		YES NO		
✓		□		MARKED ONLY				

4 3 2 1

3M™ CONNECTOR FOR PC104 PLUS EMBEDDED SYSTEM APPLICATIONS, COMPLIANT

PC104 PLUS CONNECTOR ORDERING GUIDE

5P 0 X - 2 0 X X - XX

PRODUCT FAMILY:
PC104 PLUS

No. CONTACTS:
3=120

PLATING OPTIONS: $\mu\text{M}[\mu\text{"]}$

DA = 0.08[3] MIN Au ALL OVER
1.27[50] MIN Ni ALL OVER


MG = 0.38[15] MIN Au FEMALE CONTACTS
0.08[3] MIN Au TAIL AREA
1.27[50] MIN Ni ALL UNDER

SL = 0.38[15] MIN Au FEMALE CONTACTS
2.54[100] MIN MATTE Sn TAILS
1.27[50] MIN Ni ALL UNDER
(NON-STACK-THRU ONLY)

BODY HEIGHT:	TAIL LENGTH:	STANDOFF HEIGHT:
1=9.4	2.8	[MIN-MAX]mm
2=9.4	12.40	[9.5-]
		[14.5-18.4]

TAIL TYPE:
1=PRESS-FIT
2=SOLDER

NOTE: STANDOFF HEIGHT, 15mm = COMPLIANT,
OTHERS = BUS COMPATIBLE
TAIL LENGTH, > 4.3mm = STACK-THRU
< 4.2mm = NON-STACK-THRU

DESIGN REFERENCE		NEXT ASSEMBLY		B	33766	REMOVE 5P03-20022-XX FROM TABLE	MWL	TS
REV	ECO	DATE	ISSUE DATE AND DESCRIPTION	DRFT	DATE	DRFT	CHKD	
				MWL	02/02/11			
CHKD	TS	DATE	APPVL	DATE				
		02/02/11						
DIVISION		DIVISION CODE		 3M Center St. Paul, MN 55144		© 3M COPYRIGHT This document is the copyrighted property of the 3M Company and may not be reproduced without 3M written permission or used for other than 3M authorized purposes.		
DO NOT SCALE DRAWING	SCALE	TOLERANCES EXCEPT AS NOTED		TITLE				
		INCHES .0 ± .00 ± .000 ± .0000 ±		5P03-20XX-XX PC104 PLUS COMPLIANT, 120-PIN, CONNECTOR				
THIRD ANGLE PROJECTION		MILLIMETERS		CAGE NUMBER				
INTERPRET PER ASME Y14.5 - 1994		0 ± .0 ± .3 .00 ± .20 .000 ±		DRAWING NO.				
MAX SURFACE ROUGHNESS		ANGLES ±		78-5100-2391-0				
<input type="checkbox"/> ALL SURFACES <input checked="" type="checkbox"/> MARKED ONLY				REV. B				
				MODEL				
				DET. LISTS YES NO SHT 2 OF 2				