### STATSHIFI D® MFTAI -OUT SFRIFS



# Specifications:

**Standard Document** ANSI/ESD S541 (ANSI/ESD S20.20) ANSI/FSD S114

**Electrical Properties** 

**Typical Values** Surface Resistance: Outer Surface  $1 \times 10^4 \text{ to} < 1 \times 10^8 \text{ ohms}$ 

Inner Surface Discharge Shielding

Teflon: -0.03 nC/sq. in. Charge Generation Quartz: +0.10 nC/sq. in.

Capacitance Probe (to dissipate 1 KV) <30 volts

Meets Requirements of: ESD Protective Packaging Level 3 Technical Requirements

Test Procedures/Method

ANSI/FSD STM11 11 ANSI/ESD STM11.11

ANSI/FSD STM11 31 FIA 541 Modified Incline Plane

Modified Incline Plane

MIL-STD-3010, 1003

MIL-STD-3010, 2065

375°F, 1/2 sec 60 psi

MIL-STD-3010. M3005

**ASTM D-1003** 

ASTM E168

IPC-TM-650 2 4 1

ANSI/EIA-541/Appendix E, 1kV Discharge

Nominal 0.003" (0.0762mm) ±10% Nominal -0" / + 0.125" Nominal ± 0.125" 40% (Tobias) >10 lbs

>10 lbs/in Non-corrosive Pass Silicone Not detected

**Chemical Properties** No effect on aluminum, copper, silver, Sn-Pb coated foil,

Pass

stainless steel, low carbon steel

 $1 \times 10^4 \text{ to} < 1 \times 10^{11} \text{ ohms}$ 

<20 nJ

**Physical Properties:** 

Film Thickness Width (Inside Dimensions) Length (Inside Dimensions) Light Transmission Puncture Resistance Heat Seal

Marking Adhesion

Corrosion

#### ANSI/ESD S541 Section 6.2 Outside an EPA

"Transportation of sensitive products outside of an EPA shall require packaging that provides:

- 1. Low charge generation
- 2. Dissipative or conductive materials for intimate contact
- 3. A structure that provides electrostatic discharge shielding."

#### **RoHS, REACH and Conflict Minerals Statement**

See the Desco Industries RoHS, REACH, and Conflict Minerals Statement: Regulatory Statement Statshield Bags.pdf

See Protektive Pak's Limited Warranty: ProtektivePak.com/Limted-Warranty

Statshield® and Statfree® are Registered Trademarks of Desco Industries Inc. See Bag Selection Chart Click HERE.

Made in the United States of America

Specifications and procedures subject to change without notice.

Statshield® bags are packaged 100 per package in an oversized shielding bag. See Shielding Bag Storage at TB-7057.


## STATSHIELD® BAG, SHIELDING, METAL-OUT

#### PROTEKTIVE PAK


13520 MONTE VISTA AVENUE, CHINO, CA 91710 PHONE (909) 627-2578 ProtektivePak.com

**DRAWING NUMBER** 48750

DATE: September 2021

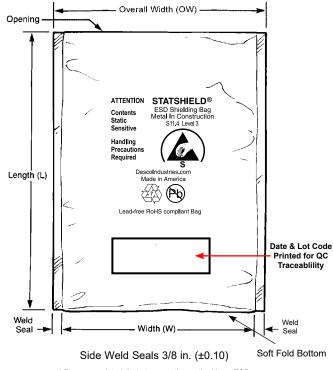

\*\* Bags are printed (hot stamp or thermal) with an ESD protective symbol and a lot code for traceability. \*

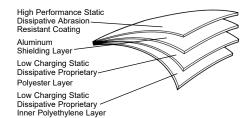



#### Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

Protektive Pak's bags are recyclable

PROTEKTIVE PAK