
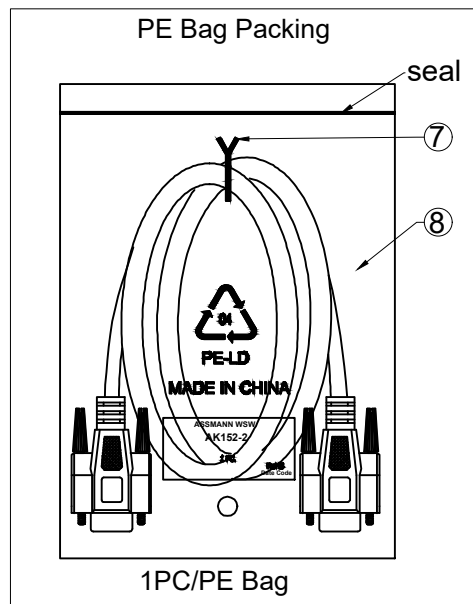


1 2 3 4 5 6 7

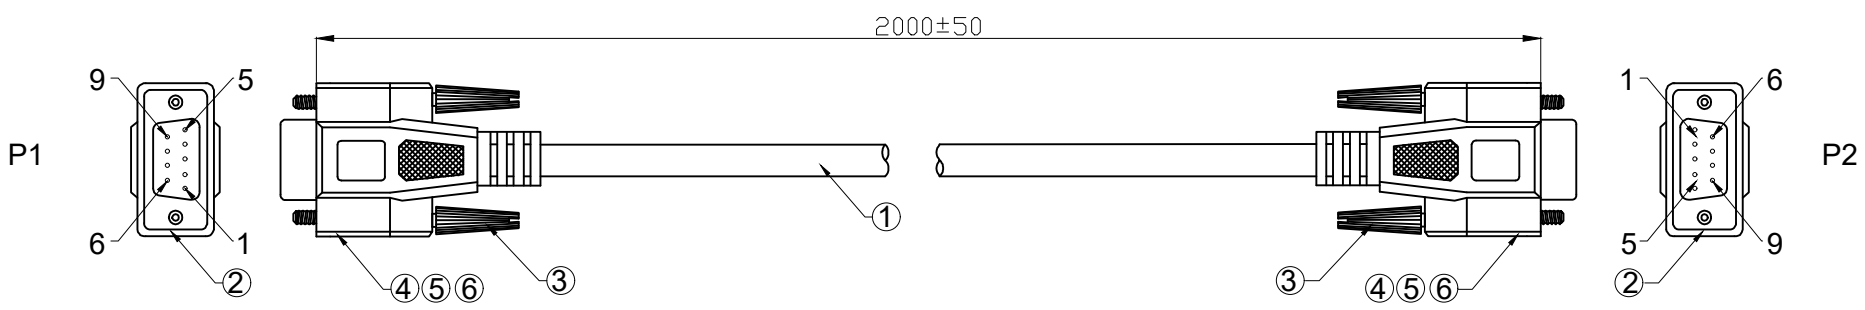

② ① PIN ASSIGNMENT

P1		P2
1	Black	1
2	Grey	2
3	Yellow	3
4	Purple	4
5	Orange	5
6	Red	6
7	Brown	7
8	Green	8
9	Blue	9
Shell	Drain	Shell

Electrical test:

- 100% short, open, miss wire test
- Conduct resistance: 2 Ohm max.
- Insulator resistance: 5Mohm min.
- Hi-Pot: 300V DC/10ms

NO.	NAME.	Q'TY	SPECIFICATION
⑧	PE Bag	1pcs	Clear Print black "MADE IN CHINA"+ "1PC"
⑦	Tie	1pcs	White tie
⑥	Outermold	NA	PVC 45P Beige(BG002)
⑤	Innermold	NA	LD-PE
④	Tube	2pcs	Heat shrink tube black OD:Ø1.5*L15mm
③	Screw	4pcs	Screw #4-40UNC D-E L=32.5mm Nickel plated Insulator color:Beige(BG002)
②	CONN	2pcs	DB 9Pin Female, Pin:G/F Shell-Nickel Insulator color:Blue solder type
①	Cable	1pcs	No UL 28AWG(7/0.12TC)*9C+D+AL/Mylar Jacket PVC, Beige(BG002) OD:5.0mm

RoHS compliant  
Unit:mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	05.04.2016	Amy
						Approved	14.12.2021	Daniel
		②	Add wire color	14.12.2021	Daniel			
		①	Update pin assignment	20.12.2018	Xavier			
		①	Drawn	05.04.2016	Amy			
Angle	TOL	Id.	Modification	Date	Name			

ASSMANN WSW-No.		AK152-2	
Drawing-No.		ASS 7604 CA	rev02
Replace		Sheet	

1 2 3 4 5 6 7