

NOTES:

MATERIAL

⑥ 1. Insulator Material: PA9T+30%GF (UL94V-0), Black

2. Contact Material : Brass

3. Contact Plating : Gold flash Over 50µ"Ni

ELECTRICAL

1. Current Rating : 1.5AMP

2. Withstand Voltage : 500V AC/DC

3. Contact Resistance : 20mΩ max

4. Insulation Resistance : 1000MΩ min

ENVIRONMENTAL

1. Operation Temperature: -40°C to +105°C

⑤ 2. Packing: Tube

Order Information :

④ xx: 06, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60

RoHS compliant
Unit: mm



File No.: E198287 ③

Scale	Free	⑥	Add the soldering profile & Change the material to PA9T		22.03.2016	Winnie
TOLERANCE		⑤	Update the packing		25.02.2014	Amy
X.X	±0,40	④	Add 06 poles version into the drawing		08.02.2014	Amy
X.XX	±0,25	③	Add UL-File No		12.12.2013	Winnie
X.XXX	±0,15	②	Update		29.06.2009	Dean
Angle°	±3°	①	Drawn		25.01.2006	Alex
			Id.			Name

ASSMANN
WSW/ components

Customer-No.	Date	Name
	25.01.2006	Alex
	22.03.2016	Winnie

ASSMANN WSW-No. AWHW2 XXA-0202

Drawing-No. ASS 2318 CO

Replace Sheet 1/2

1

2

3

4


5

6

7

A

SMT Type Product Past IR Reflow Graph

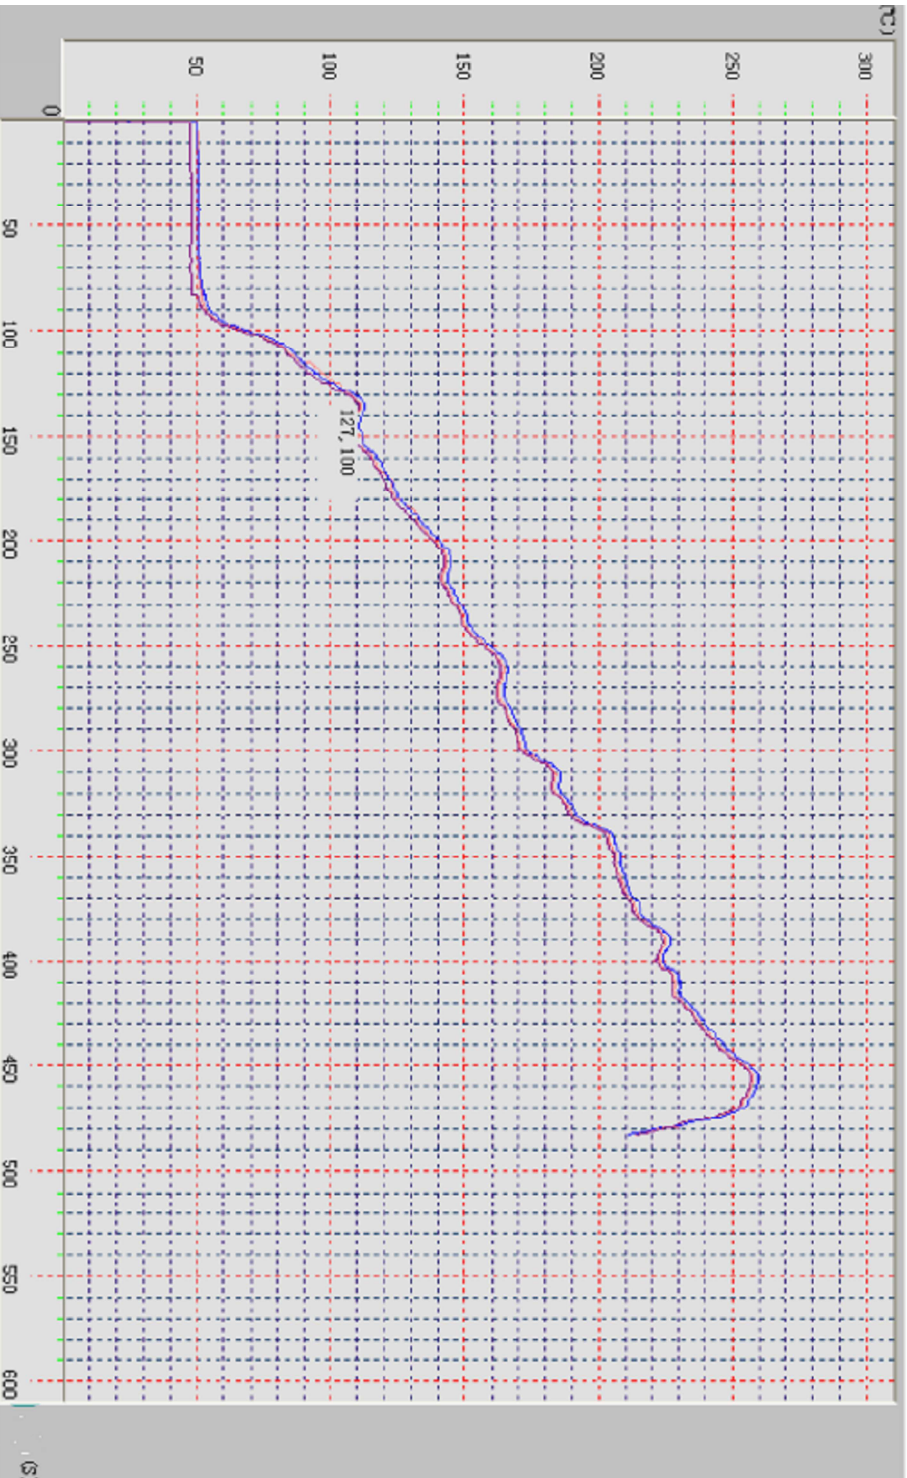

A

B

B

C

C

D

D

E

E

F

F

G

G

RoHS compliant
Unit: mm



Scale	Free	⑥	Add the soldering profile & Change the material to PA9T	22.03.2016	Winnie			Customer-No.	
TOLERANCE		⑤	Update the packing	25.02.2014	Amy	Drawn	25.01.2006	ASSMANN WSW-No.	
X.X	±0.40	④	Add 06 poles version into the drawing	08.02.2014	Amy	Approved	22.03.2016	AWHW2	XXA-0202
X.XXX	±0.25	③	Add UL-File No	12.12.2013	Winnie			Drawing-No.	
X.XXX	±0.15	②	Update	29.06.2009	Dean			Replace	ASS 2318 CO
Angle°	±3°	①	Drawn	25.01.2006	Alex				rev06
			Id.						Sheet
			Modification						2/2

1

2

3

4

5

6

7

H