



D1RFRD006


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		NOTES MODIFY	Among 11/08/04	

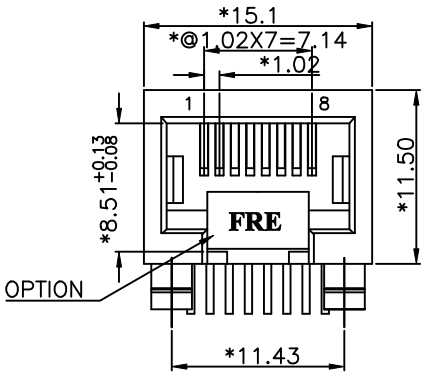

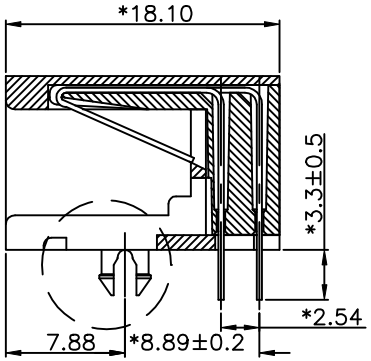

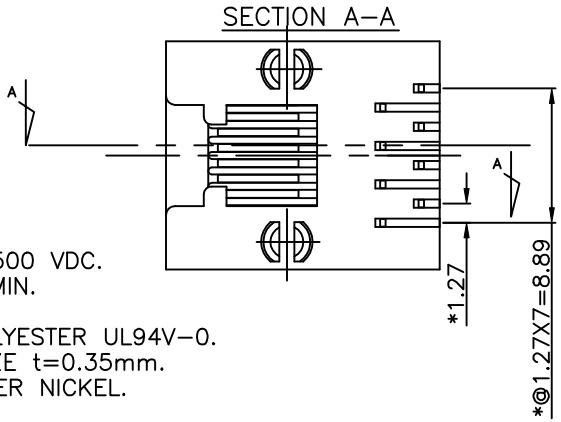



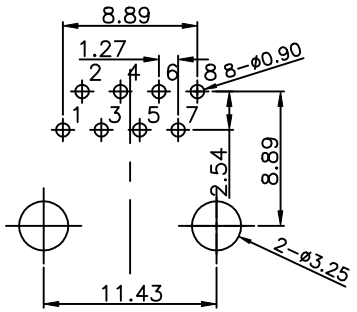

PCB T=1.60mm

PC BOARD LAYOUT COMPONENT SIDE SHOWN

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V–0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
3. ⚠1 PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE–SOLDER : 1 LB MIN.
6. PCB RETENTION POST–SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : –40°C TO +85°C.
2. OPERATION: –40°C TO +85°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E538X–E002XX–L

NO OF CONTACT:
- 2– 2C
- 4– 4C
- 6– 6C
- 8– 8C

- 1– 3u" 2– 6u" 3–15u" 4–30u" 5–50u" 6–Pd 20u"
- 1–W/FRE LOGO
- R–W/O LOGO

MM (INCH)	DFTO SAMMY	DATE 06/22/04	FULL RISE ELECTRONIC CO., LTD
TOLERANCES EXCEPT AS NOTED	CHKD SAMMY	DATE2004/11/16	
MM .0 ±0.20 ± .00 ±0.15 ± .000 ±0.075 ±	MFO	DATE	TITLE 11.5 SIDE ENTRY 8P FCC DEEP TYPE(LEAD_FREE)
	APPVL-LUSHENG	DATE2004/11/17	
ANGLES ±	MATERIAL :		DRAWING NO. GE533096 SIZE A3 REV 1
THIRD ANGLE PROJECTION	QT'Y :		/PART NO. SEE NOTE
DETACHED LISTS	FINISH :		DO NOT SCALE DRAWING SHEET X OF Y
	SCALE :		