


Specification Sheet

Part Number: T30RSF9M4

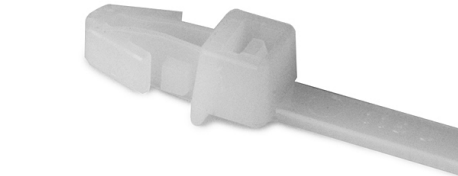

All-in-one bundling and fastening solution reduces costs and assembly time.

The arrowhead design of these ties offers a low insertion force and a high extraction force.

High-spec materials and superior design deliver versatility, performance and value.

1-Piece Cable Tie/Arrowhead Mount, 6.3"L, 30lb, 0.04"–0.09" Panel Thickness, PA66, Natural, 1000/pkg

|                     |                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article Number      | 126-00704                                                                                                                                                                                                                                                                                                                                                                        |
| Type                | T30RSF(U)                                                                                                                                                                                                                                                                                                                                                                        |
| Color               | Natural (NA)                                                                                                                                                                                                                                                                                                                                                                     |
| Quantity Per        | bag                                                                                                                                                                                                                                                                                                                                                                              |
| Product Description | One-piece mounting ties offer a complete solution by both bundling cable and simultaneously providing a mounting solution. The arrowhead design of this push mount inserts easily and locks securely in place. HellermannTyton's one-piece mounting ties combine high-specification materials with superior design to deliver dependable performance in a range of applications. |
| Short Description   | 1-Piece Cable Tie/Arrowhead Mount, 6.3"L, 30lb, 0.04"–0.09" Panel Thickness, PA66, Natural, 1000/pkg                                                                                                                                                                                                                                                                             |

|                  |                   |
|------------------|-------------------|
| Global Part Name | T30RSF(U)-PA66-NA |
|------------------|-------------------|

|                                     |      |
|-------------------------------------|------|
| Minimum Tensile Strength (Imperial) | 30.0 |
|-------------------------------------|------|

|                                   |     |
|-----------------------------------|-----|
| Minimum Tensile Strength (Metric) | 135 |
|-----------------------------------|-----|

|                     |     |
|---------------------|-----|
| Length L (Imperial) | 6.3 |
|---------------------|-----|

|                   |        |
|-------------------|--------|
| Length L (Metric) | 160.02 |
|-------------------|--------|

|                 |           |
|-----------------|-----------|
| Fixation Method | Arrowhead |
|-----------------|-----------|

|                               |      |
|-------------------------------|------|
| Identification Plate Position | none |
|-------------------------------|------|

|                    |    |
|--------------------|----|
| Releasable Closure | No |
|--------------------|----|

|             |              |
|-------------|--------------|
| Tie Closure | plastic pawl |
|-------------|--------------|

|         |                 |
|---------|-----------------|
| Variant | Inside Serrated |
|---------|-----------------|

|                    |      |
|--------------------|------|
| Width W (Imperial) | 0.14 |
|--------------------|------|

|                  |     |
|------------------|-----|
| Width W (Metric) | 3.6 |
|------------------|-----|

|                                |      |
|--------------------------------|------|
| Bundle Diameter Min (Imperial) | 0.06 |
|--------------------------------|------|

|                              |     |
|------------------------------|-----|
| Bundle Diameter Min (Metric) | 1.6 |
|------------------------------|-----|

|                                |     |
|--------------------------------|-----|
| Bundle Diameter Max (Imperial) | 1.3 |
|--------------------------------|-----|

|                              |      |
|------------------------------|------|
| Bundle Diameter Max (Metric) | 31.0 |
|------------------------------|------|

|                                                |              |
|------------------------------------------------|--------------|
| <b>Thickness T (Imperial)</b>                  | 0.05         |
| <b>Thickness T (Metric)</b>                    | 1.2          |
| <b>Height H (Imperial)</b>                     | .20          |
| <b>Height H (Metric)</b>                       | 5.70         |
| <b>Panel Thickness Min (Imperial)</b>          | 0.035        |
| <b>Panel Thickness Max (Imperial)</b>          | 0.094        |
| <b>Panel Thickness Min (Metric)</b>            | 0.9          |
| <b>Panel Thickness Max (Metric)</b>            | 2.4          |
| <b>Mounting Hole Diameter D (Imperial)</b>     | 0.19 - 0.22  |
| <b>Mounting Hole Diameter D (Metric)</b>       | 4.7 - 5.6 mm |
| <b>Mounting Hole Diameter D Min (Imperial)</b> | 0.19         |
| <b>Mounting Hole Diameter D Max (Imperial)</b> | 0.22         |
| <b>Mounting Hole Diameter D Max (Metric)</b>   | 5.6          |

**Material** Polyamide 6.6 (PA66)

**Material Shortcut** PA66

|                                      |                                  |
|--------------------------------------|----------------------------------|
| <b>Flammability</b>                  | UL 94 V-2                        |
| <b>Operating Temperature</b>         | -40°F to +185°F (-40°C to +85°C) |
| <b>Reach Compliant (Article 33)</b>  | Yes                              |
| <b>ROHS Compliant</b>                | Yes                              |
| <b>Certification/Specification</b>   | UL-ZODZ2.E64139                  |
| <b>UL Recognized (US)</b>            | Yes                              |
| <b>UL Recognized (US and Canada)</b> | Yes                              |
| <b>Package Quantity (Imperial)</b>   | 1000                             |
| <b>Package Quantity (Metric)</b>     | 1000                             |
| <b>Customs Number</b>                | 3926909988                       |