
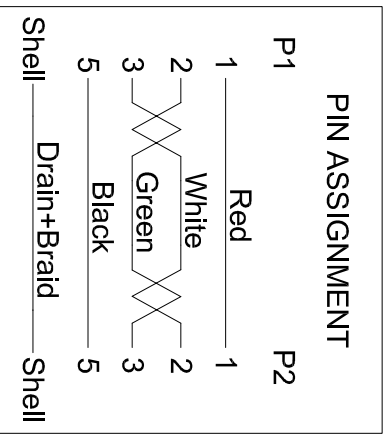


Cable White print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 28AWG/2C
AWM I/II A 80°C 30V FT1 USB CABLE

- Electrical test:**
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5Mohm min.
 4. Dielectric test: DC 300V

WSW P/N	Jacket color	Length(mm)
AK669M-1	Black	1000±30
AK669M-2	Black	2000±50

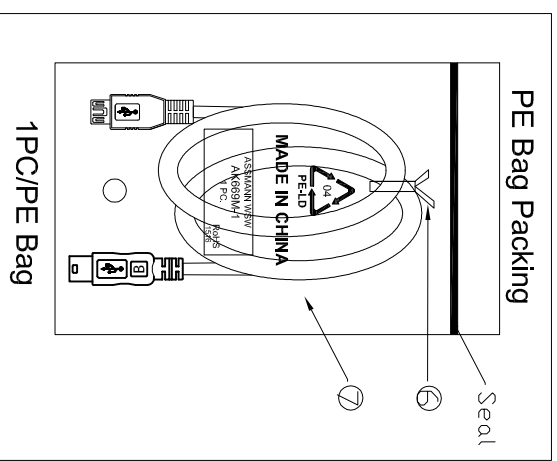

①	PE Bag	1	Clear Print black "MADE IN CHINA"+ "1PC"
②	TIE	1	Black
③	Out Jacket	NA	PVC-45P Black
④	Inner Jacket	NA	LD-PE
⑤	CONN	1	USB Mini 5P Male Shell:Nickel Pin:G/F Insulator color:Black
⑥	CONN	1	USB Mini 5P Female Shell:Nickel Pin:G/F Insulator color:Black
⑦	Cable	1	USB2.0 UL2725 28#/1P+28#/2C+AEB OD:3.8mm Black

SPECIFICATION

Customer-No.

ASSMANN WSW-No.

AK669M-X

RoHS compliant
 Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

NO.	NAME.	QTY	Date	Name
①	Drawn		22.11.2016	Amy
	Approved		22.11.2016	Amy



Drawing-No.

ASS 7783 CA rev00

Replace

Sheet

1	2	3	4	5	6	7
A	B	C	D	E	F	G
H	G	F	E	D	C	B
1	2	3	4	5	6	7