


Specification Sheet

Part Number: T150L2X2

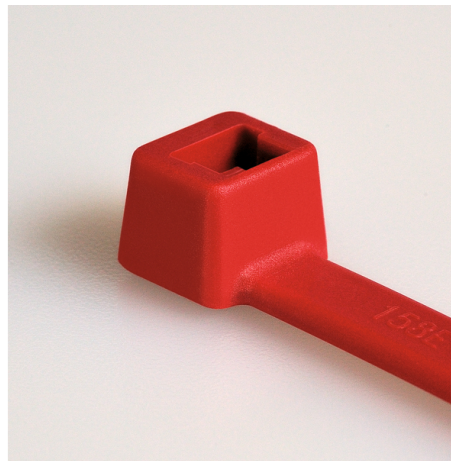

Engineered and manufactured for maximum performance and quality
Made from 100% high-quality plastic to ensure efficient recycling
Inside serration for a strong grip onto bundles
Easy application either manually or with a processing tool

Heavy Duty Cable Tie, 32" Long, UL Rated, 175lb Tensile Strength, PA66, Red, 25/pkg

Article Number	111-15407
Type	T150L
Color	Red (RD)
Quantity Per	bag
Product Description	Heavy duty T-Series cable ties feature inside serrations to provide a positive hold on wire and cable bundles. Durable head design guarantees high tensile strength and a low insertion force. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.
Short Description	Heavy Duty Cable Tie, 32" Long, UL Rated, 175lb Tensile Strength, PA66, Red, 25/pkg

Global Part Name	T150L-PA66-RD
-------------------------	---------------

Minimum Tensile Strength (Imperial)	175.0
--	-------

Minimum Tensile Strength (Metric)	780.0
--	-------

Length L (Imperial)	32.0
----------------------------	------

Length L (Metric)	820.0
--------------------------	-------

Identification Plate Position	none
--------------------------------------	------

Releasable Closure	No
---------------------------	----

Tie Closure	plastic pawl
--------------------	--------------

Variant	Inside Serrated
----------------	-----------------

Width W (Imperial)	0.35
---------------------------	------

Width W (Metric)	8.9
-------------------------	-----

Bundle Diameter Min (Imperial)	0.31
---------------------------------------	------

Bundle Diameter Min (Metric)	8.0
-------------------------------------	-----

Bundle Diameter Max (Imperial)	9.65
---------------------------------------	------

Bundle Diameter Max (Metric)	245.0
-------------------------------------	-------

Thickness T (Metric)	1.9
-----------------------------	-----

Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL 94 V-2
Halogen Free	Yes
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
ROHS Compliant	Yes
Certification/Specification	UL-ZODZ2.E64139
UL Recognized (US)	Yes
UL Listed (US and Canada)	Yes
UL Recognized (US and Canada)	Yes
UL Listed (US)	Yes
Package Quantity (Imperial)	25
Package Quantity (Metric)	25
Customs Number	3926909988

© 2022 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)